

## BARISTA - REFRIGERATED MILK DRAWER

### MODEL

- IL-C-DRW-A001 | Barista Refrigerated Milk Drawer

### OVERVIEW

Ergonomically designed as an innovative solution for café environments, the Barista Milk Drawer is the best in class solution for high capacity milk storage. The pull out drawer and front flap prevent bending down to access product, which saves time and is easy to use. All bottles are stored upright with a gravity fed tray so bottles are always at the front. Drawer parts are operator removable which allows for easy cleaning. It's heavy duty, low maintenance and guaranteed to hold product at critical temperatures.


### FEATURES

- High energy efficiency - 0.12 kWh per hour average
- Refrigerated section maintains +1°C - +3°C core product temperature of milk bottles
- Milk products maintain temperature of under +4°C for up to three hours with open flap
- Angle base for gravity feed, with adjustable bottle matting, means stock is always at the front
- Adjustable 150mm feet (+30mm adjustment)
- Quick and easy access of milk through ergonomic front flap design
- High storage capacity of 24 2L bottles
- Ergonomically designed prevents operator bending, means easy and fast to use
- Easy installation with anti-tilt floor fixing system
- Operator removable parts for easy cleaning
- Operator removable pre-filter for clean airflow and high efficiency, keeps appliance running at it's best



UPPER : BARISTA REFRIGERATED MILK DRAWER, FLAP OPEN, DRAWER CLOSED  
 LOWER : BARISTA REFRIGERATED MILK DRAWER, FLAP AND DRAWER CLOSED

### KEY SELLING FEATURES

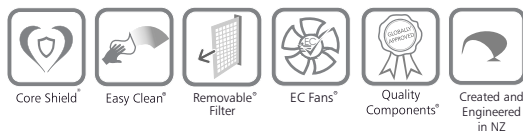

|               |               |                     |                   |           |
|---------------|---------------|---------------------|-------------------|-----------|
| IL-C-DRW-A001 | CLIMATE CLASS | 3 max 25°C / 60% RH | TEMPERATURE RANGE | +1°C-+3°C |
|---------------|---------------|---------------------|-------------------|-----------|

Designed to meet and exceed the following compliances and approvals : EN 55014, EN55014-1, EN 55014-2, EN 61000, EN 61000-3-2, EN 61000-3-3, IEC 60335, IEC 60335-1, IEC 60335-2-89.



\*Conditions Apply



VIEW ONLINE AT [FPGWORLD.COM](http://FPGWORLD.COM)



## BARISTA - REFRIGERATED MILK DRAWER

### SPECIFICATIONS

#### Refrigeration Data

|               | CLIMATE CLASS       | CORE PRODUCT TEMP RANGE | REFRIGERANT | REFRIGERANT CHARGE | REMOTE CONNECTION | CONDENSATE REMOVAL |
|---------------|---------------------|-------------------------|-------------|--------------------|-------------------|--------------------|
| IL-C-DRW-A001 | N max 25°C / 60% RH | +1°C - +3°C             | R134A       | See serial label   | N/A               | Manual/Auto*       |

\*Option or Accessory

Please note: Refrigeration duty; 355W @ -5°C SST & 35°C condensing

Please note: Remote condensing unit not supplied

#### Electrical Data

|               | VOLTAGE   | PHASE  | CURRENT | kWh per hour [average] | MAINS CONNECTION     | MAINS CONNECTION PLUG | IP RATING |
|---------------|-----------|--------|---------|------------------------|----------------------|-----------------------|-----------|
| IL-C-DRW-A001 | 220-240 V | Single | 1.46    | 0.12 kWh per hour      | 3 metre 3 core cable | 10 amp, 3 pin plug    | IP 22     |

#### Display

|               | STORAGE AREA       | 2L BOTTLE CAPACITY | ACCESS - FRONT    | ACCESS - REAR | STORAGE DRAWERS | CONSTRUCTION        |
|---------------|--------------------|--------------------|-------------------|---------------|-----------------|---------------------|
| IL-C-DRW-A001 | 0.33m <sup>2</sup> | 24 bottles         | Drawer/Front flap | N/A           | 1               | 304 Stainless Steel |

#### Dimensions [Uncrated and Crated]

|               | H x W x D mm [Uncrated] | MASS [Uncrated] | H x W x D mm [Crated] | MASS [Crated] | CUBIC VOLUME [Crated] |
|---------------|-------------------------|-----------------|-----------------------|---------------|-----------------------|
| IL-C-DRW-A001 | 845 x 700 x 789         | 115 kg          | 1005 x 774 x 863      | 157 kg        | 0.64m <sup>3</sup>    |

#### Installation note:


Model cutout dimensions:

· IL-C-DRW-A001 model requires cavity 850mm x 710mm x 725mm. (see product manual for installation guide)


Unobstructed airflow must be maintained to ensure unit performance and maintain warranty

In line with policy to continually develop and improve it's products, Future Products Group reserves the right to change specifications and design without notice.


For more information and technical data, including installation documents, please refer to the website - [www.fpgworld.com](http://www.fpgworld.com)

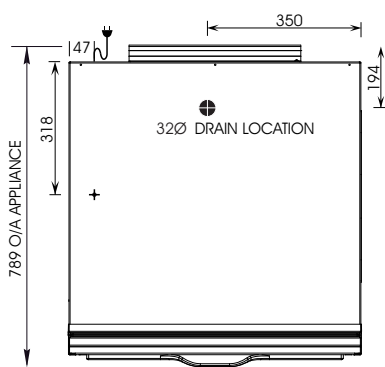


PLAN VIEW

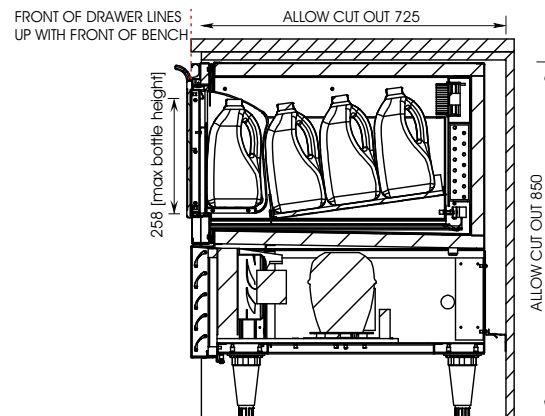


SECTION VIEW - JOINERY CUT OUT

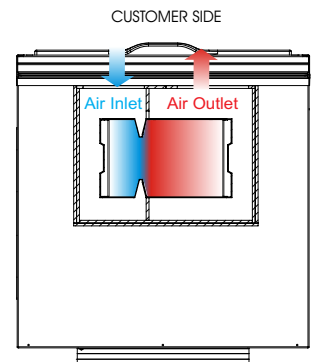


PLAN VIEW  
FREEFLOW AIR TECHNOLOGY

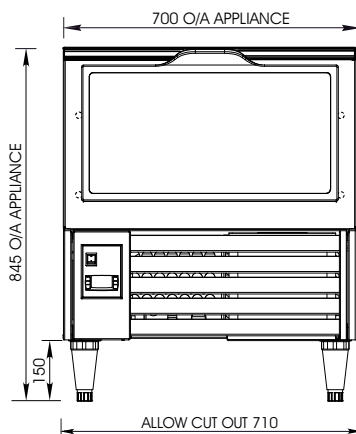

FRONT ELEVATION

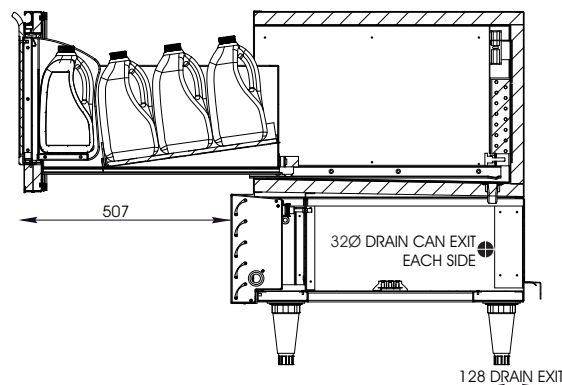

SECTION VIEW

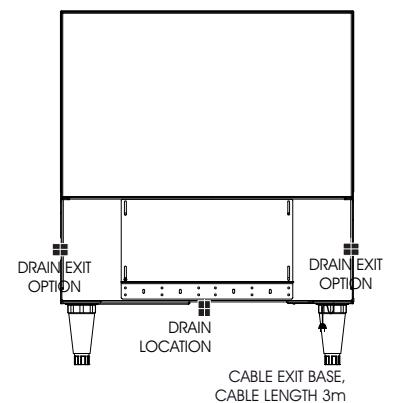

REAR ELEVATION