



FPGWORLD.COM

7-ELEVEN

TOWER 800

CONTROLLED AMBIENT: R290 **VSD**
x 7 SHELVES / CONDIMENTS HOLDER

RANGE	7-ELEVEN TOWER
TEMPERATURE	CONTROLLED AMBIENT
MODEL	IL-7EL-AT-B101-00
FRONT	SWING DOORS
INSTALLATION	FREESTANDING
REFRIGERATION	INTEGRAL
TECHNOLOGY	VARIABLE SPEED DRIVE (VSD)
HEIGHT	2061mm
WIDTH	800mm
DEPTH	773mm

CORE PRODUCT TEMPERATURE	+16°C – +18°C
ENVIRONMENTAL TEST CONDITIONS	CLIMATE CLASS 3 25°C / 60% RH

FEATURES

Maximum energy efficiency: 0.14 kWh per hour (average)

Maintains an average of +16°C - +18°C core product temperature at Climate Class 3 25°C/60%RH

- Smart display powdercoated 'Bright Silver' with front swing doors (customer side)

Front Swing Doors Controlled Ambient Display

- Eight full-width display levels: Seven height adjustable shelves with 30mm ticket strips and base are full cabinet width to support maximum display capacity
- 50,000 hour LED lighting system at 1500 lumens per metre in cabinet top and to each shelf

Operational Excellence

- Constructed from stainless and mild steel - powdercoated 'Bright Silver' with toughened safety glass for durability
- Variable speed drive inverter compressor and electronic controller ensure the cabinet is operating as efficiently as possible
- Auto Condensate Removal (ACR)
- Fitted with condiments holder
- Fitted with adjustable 150mm legs (+30mm adjustment)



Showing : 7-Eleven Tower 800mm controlled ambient freestanding with swing doors, seven shelves and base. Fitted with condiments holder.



Please contact FPG to discuss your requirements for meeting country-specific standards.

FPGWORLD.COM



FPGWORLD.COM

7-ELEVEN

TOWER 800

CONTROLLED AMBIENT: R290 VSD
x 7 SHELVES / CONDIMENTS HOLDER

TEMPERATURE DATA

MODEL	CORE PRODUCT TEMPERATURE	ENVIRONMENTAL TEST CONDITIONS	REFRIGERATION	REFRIGERANT	A LIMIT	CONDENSATE REMOVAL
IL-7EL-AT-B101-00	+16°C - +18°C	Climate Class 3 - 25°C / 60% RH	Integral - VSD	R290	N/A	Automatic

ELECTRICAL DATA

MODEL	VOLTAGE	PHASE	CURRENT	E24H (kWh)	kWh per hour (average)	IP RATING	MAINS		LED LIGHTING		
							CONNECTION	CONNECTION PLUG	HOURS	LUMENS	COLOUR
IL-7EL-AT-B101-00	220-240 V	Single	15 A	3.45	0.14	IP 22	3 metre 3 core cable	10 amp / 3 pin plug Type I	50,000	1500 per metre	Natural

CAPACITY, ACCESS & CONSTRUCTION

MODEL	DISPLAY AREA	LEVELS	ACCESS FRONT	ACCESS REAR	CHASSIS CONSTRUCTION
IL-7EL-AT-B101-00	2.0 m ²	7 Shelves + Base	Swing doors	N/A	Stainless 304 and mild steel


DIMENSIONS

MODEL	H x W x D mm (Uncrated)	MASS (Uncrated)
IL-7EL-AT-B101-00	2061 x 800 x 773	214 kg

Crated weights and dimensions vary. Please contact us for information on your shipment.

Installation note: Designed to be installed as a stand alone unit.

UNOBSTRUCTED AIRFLOW MUST BE MAINTAINED TO ENSURE UNIT PERFORMANCE AND TO MAINTAIN WARRANTY.

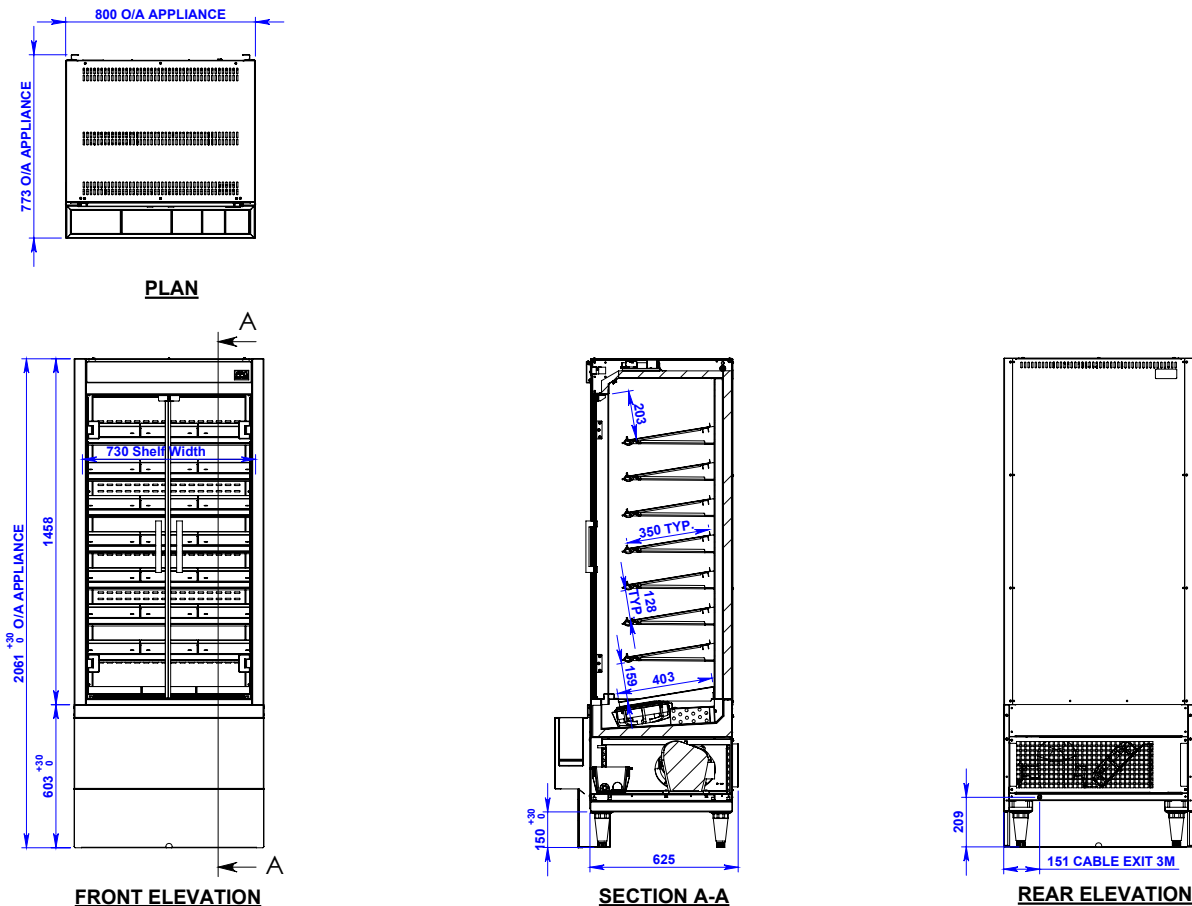

More information including technical data and installation guidelines is available from the Product Manual.

In line with our policy to continually develop, improve and support our products, Future Products Group Ltd reserves the right to change specifications and design without notice.

Have a question? Please email us at sales@fpgworld.com or visit www.fpgworld.com for full contact details for your region.

