



FPGWORLD.COM

7-ELEVEN

TOWER 800

HEATED

x 7 SHELVES / CONDIMENTS HOLDER

RANGE	7-ELEVEN TOWER
TEMPERATURE	HEATED
MODEL	IL-7EL-HT-A005-00
FRONT	SWING DOORS
INSTALLATION	FREESTANDING
HEIGHT	2061mm
WIDTH	800mm
DEPTH	773mm


TEMPERATURE RANGE	+68°C – +95°C
OPERATING TEMPERATURE	+80°C
ENVIRONMENTAL TEST CONDITIONS	22°C / 65% RH

FEATURES



 **Cabinet operating temperature range +68°C - +95°C**
Operating temperature +80°C

- Smart display powdercoated 'Bright Silver' with front swing doors (customer side)

Front Swing Doors Heated Display

- Seven height-adjustable stainless steel wire rack shelves are full cabinet width to support maximum display capacity
-  25,000 hour LED lighting system at 2758 lumens per metre in cabinet top and to each shelf
- Unique shelf mounted ticket strip front: 30mm

Operational Excellence

-  Constructed from stainless steel and mild steel - powdercoated 'Bright Silver' with toughened safety glass for durability
-  Low-wattage, high-density element provides even temperature distribution
- Design to be freestanding
- Fitted with condiments holder
- Fitted with adjustable 150mm legs (+30mm adjustment)



Showing : 7-Eleven Tower 800mm heated freestanding with swing doors and seven shelves
 Fitted with condiments holder



Please contact FPG to discuss your requirements for meeting country-specific standards.



FPGWORLD.COM

7-ELEVEN

TOWER 800

HEATED

x 7 SHELVES / CONDIMENTS HOLDER

HEATED DATA

MODEL	TEMPERATURE RANGE	OPERATING TEMPERATURE	ENVIRONMENTAL TEST CONDITIONS	HEATING
IL-7EL-HT-A005-00	+68°C - +95°C	+80°C	22°C / 65% RH	Low-wattage, high-density element

ELECTRICAL DATA

MODEL	VOLTAGE	PHASE	CURRENT	E24H (kWh)	kWh per hour (average)	IP RATING	MAINS		LED LIGHTING		
							CONNECTION	CONNECTION PLUG	HOURS	LUMENS	COLOUR
IL-7EL-HT-A005-00	220-240 V	Single	6.3 A	-	-	IP 22	3 metre 3 core cable	10 amp / 3 pin plug Type I	25,000	2758 per metre	Natural

CAPACITY, ACCESS & CONSTRUCTION


MODEL	DISPLAY AREA	LEVELS	ACCESS FRONT	ACCESS REAR	CHASSIS CONSTRUCTION
IL-7EL-HT-A005-00	1.8 m ²	7 Shelves	Swing doors	N/A	Stainless 304 and mild steel

DIMENSIONS


MODEL	H x W x D mm (Uncrated)	MASS (Uncrated)
IL-7EL-HT-A005-00	2061 x 800 x 774	288 kg

Crated weights and dimensions vary. Please contact us for information on your shipment.


Installation note: Designed to be installed as a stand alone unit.




PLAN

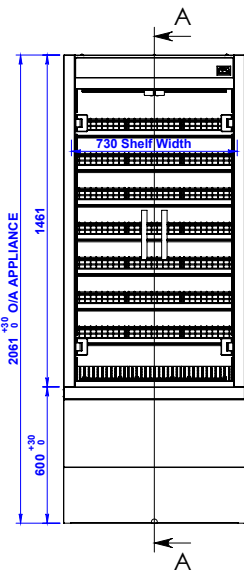

FRONT ELEVATION

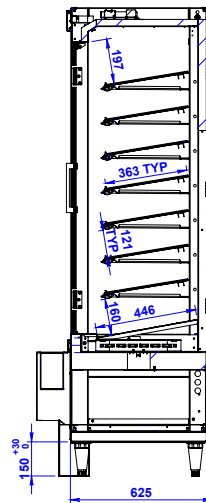

SECTION A-A

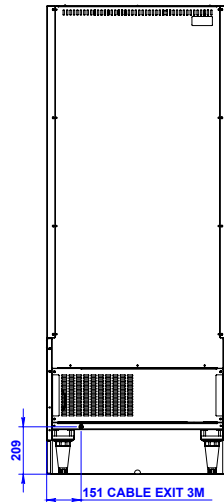

REAR ELEVATION

More information including technical data and installation guidelines is available from the Product Manual.

In line with our policy to continually develop, improve and support our products, Future Products Group Ltd reserves the right to change specifications and design without notice.

Have a question? Please email us at sales@fpgworld.com or visit www.fpgworld.com for full contact details for your region.



Worldwide contact details: