



FPGWORLD.COM

# 7-ELEVEN

IMPULSE 1400H  
OPEN FRONT/3 SHELVES  
REFRIGERATED: R290 **VSD**

RANGE	7-ELEVEN IMPULSE
TEMPERATURE	REFRIGERATED
MODEL	IL-7EL-VI09-R-13-05-B100
FRONT	OPEN FRONT
INSTALLATION	FREESTANDING/ROLLERS
REFRIGERATION	INTEGRAL, R290
TECHNOLOGY	VARIABLE SPEED DRIVE (VSD)
HEIGHT	1350mm
WIDTH	900mm
DEPTH	466mm

CORE PRODUCT TEMPERATURE	+0.5°C – +2°C
ENVIRONMENTAL TEST CONDITIONS	CLIMATE CLASS 3 25°C / 60% RH
CABINET CLASSIFICATION	3M0

ENERGY EFFICIENCY	
NZ & AU	
For Star Rating, please visit <a href="http://reg.energyrating.gov.au/comparator">reg.energyrating.gov.au/comparator</a>	

## FEATURES

**Very high energy efficiency: 0.57 kWh per hour (average)**

**Maintains an average of +0.5°C - +2°C core product temperature at Climate Class 3: 25°C/60%RH**

- Robust open front display, powdercoated Bright Silver for a sleek finish

### Open Front Refrigerated Display

- Four full-width display levels: three adjustable shelves and base are powdercoated Bright Silver and full cabinet width to support maximum display capacity
- Pluggable 50,000 hour LED lighting system at 800 lumens per metre in cabinet top and to each shelf
- Shelf and base ticket strip: 30mm

### Operational Excellence

- Constructed from stainless and mild steel - powdercoated Bright Silver with fully double-glazed, toughened safety glass for maximum energy efficiency, climate control and durability
- Fitted with high capacity EC (electronically controlled) energy saving and low noise fans
- Variable speed drive inverter compressor and electronic controller ensure the cabinet is operating as efficiently as possible
- Cabinet features an 'air curtain' to retain cold air within cabinet
- Configured with a pre-filter - with regular cleaning by operations staff the life of the cabinet can be extended
- Auto Condensate Removal (ACR)
- Fitted with unidirectional rollers



Showing : 7-Eleven Impulse Slim 13H 09W refrigerated Bright Silver freestanding open front with three shelves and base



Please contact FPG to discuss your requirements for meeting country-specific standards.



FPGWORLD.COM

# 7-ELEVEN

IMPULSE 1400H  
OPEN FRONT/3 SHELVES

REFRIGERATED: R290 **VSD**

## REFRIGERATION DATA

MODEL	CORE PRODUCT TEMPERATURE	ENVIRONMENTAL TEST CONDITIONS	REFRIGERATION	REFRIGERANT	A LIMIT	CONDENSATE REMOVAL
IL-7EL-VI09-R-13-05-B100	+0.5°C - +2°C	Climate Class 3 - 25°C / 60% RH	Integral - VSD	R290	9.09 m <sup>2</sup>	ACR

## ELECTRICAL DATA

MODEL	VOLTAGE	PHASE	CURRENT	E24H (kWh)	kWh per hour (average)	IP RATING	MAINS		LED LIGHTING		
							CONNECTION	CONNECTION PLUG	HOURS	LUMENS	COLOUR
IL-7EL-VI09-R-13-05-B100	220-240 V	Single	5.3 A	13.58	0.57	IP X0	3 metre 3 core cable	10 amp 3 pin plug	50,000	800 per metre	Natural

## CAPACITY, ACCESS & CONSTRUCTION

MODEL	DISPLAY AREA	LEVELS	ACCESS FRONT	ACCESS REAR	CHASSIS CONSTRUCTION
IL-7EL-VI09-R-13-05-B100	0.78 m <sup>2</sup>	3 Shelves + Base	Open front	N/A	Mild steel and double-glazed safety glass


## DIMENSIONS

MODEL	H x W x D mm (Uncrated)	MASS (Uncrated)
IL-7EL-VI09-R-13-05-B100	1350 x 900 x 466	-

Crated weights and dimensions vary. Please contact us for information on your shipment.

**Installation note:** Designed to be installed as a stand alone unit or in an island matrix.

**UNOBSTRUCTED AIRFLOW MUST BE MAINTAINED TO ENSURE UNIT PERFORMANCE AND TO MAINTAIN WARRANTY. WHEN PLACED AGAINST A WALL OR IN AN ISLAND MATRIX AIRFLOW/VENTING IS RE-DIRECTED TO TOP OF CABINET. ALLOW NO LESS THAN 200mm CLEARANCE ABOVE CABINET FOR AIRFLOW.**

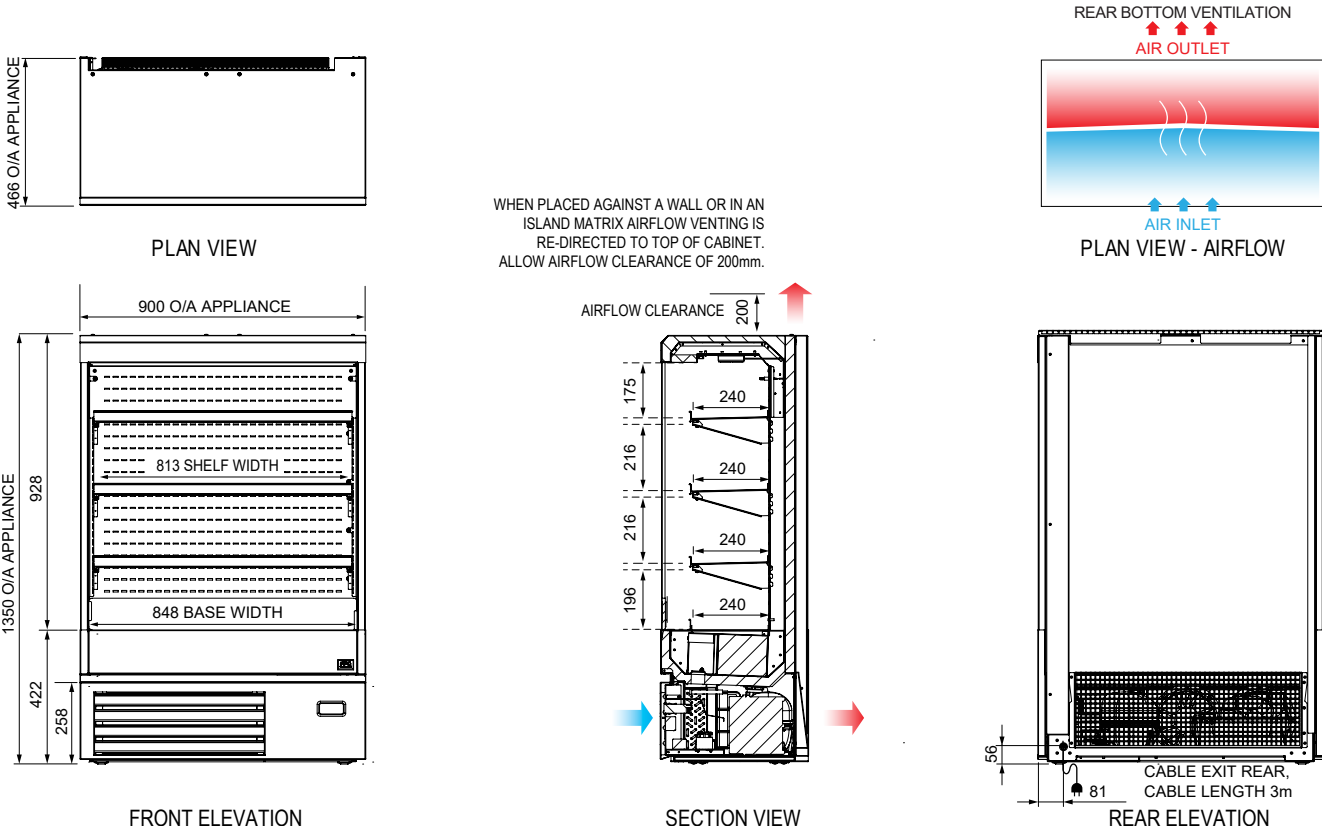

More information including technical data and installation guidelines is available from Future Products Group.

In line with our policy to continually develop, improve and support our products, Future Products Group Ltd reserves the right to change specifications and design without notice.

Have a question? Please email us at [sales@fpgworld.com](mailto:sales@fpgworld.com) or visit [www.fpgworld.com](http://www.fpgworld.com) for full contact details for your region.

