



FPGWORLD.COM

# INLINE

## BARISTA FREESTANDING/SQUARE REFRIGERATED: R513A

RANGE	INLINE BARISTA
TEMPERATURE	REFRIGERATED
MODEL	IL-C-DRW-A006
FRONT	DRAWER/FLAP
INSTALLATION	FREESTANDING/LEGS
REFRIGERATION	INTEGRAL, R513A
HEIGHT	846mm
WIDTH	700mm
DEPTH	738mm

CORE PRODUCT TEMPERATURE	+2°C - +4°C
ENVIRONMENTAL TEST CONDITIONS	CLIMATE CLASS 4 30°C / 55% RH
CABINET CLASSIFICATION: REFRIGERATED STORAGE CABINET	4M1

### ENERGY EFFICIENCY

For NZ & AU Star Rating, please visit [reg.energyrating.gov.au/comparator](http://reg.energyrating.gov.au/comparator)

## FEATURES

- High energy efficiency: 0.13 kWh per hour (average)**
- Maintains an average of +2°C - +4°C core product temperature at Climate Class 4 30°C/55%RH**
- Milk maintains temperature < +4°C for up to three hours with flap open**

### Pull Out Drawer and Front Flap

- Quick and easy access of milk through ergonomic front flap design
- Angled base for gravity feed, with adjustable bottle matting, means stock is always at the front
- Drawer slides out for ease of stocking

### Operational Excellence

- Brushed stainless steel frame
- High storage capacity of 0.33m<sup>3</sup>  
Accommodates 24 2L bottles - 257 x 131 x 90mm (HxWxD)
- Easy installation with an adjustable anti-tilt device to stabilise cabinet when the drawer is open
- Configured with a pre-filter - with regular cleaning by operations staff the life of the cabinet can be extended
- Easy access for cleaning
- Splash proof panel over the front controls
- Fitted with legs



Indicates sustainability benefits



Please contact FPG to discuss your requirements for meeting country-specific standards.

FPGWORLD.COM

### REFRIGERATION DATA

MODEL	CORE PRODUCT TEMPERATURE	ENVIRONMENTAL TEST CONDITIONS	REFRIGERANT	REFRIGERANT CHARGE	CONDENSATE REMOVAL
IL-C-DRW-A006	+2°C - +4°C	Climate Class 4 - 30°C / 55% RH	R513A	See serial label	Plumb to waste

### ELECTRICAL DATA

MODEL	VOLTAGE	PHASE	CURRENT	E24H (kWh)	kWh per hour (average)	IP RATING	MAINS	
							CONNECTION	CONNECTION PLUG <sup>1</sup>
IL-C-DRW-A006	220-240 V	Single	1.4 A	3.11	0.13	IP 22	3 metre, 3 core cable	10 amp, 3 pin plug

<sup>1</sup>Please advise country to change plug specification.

### CAPACITY, ACCESS & CONSTRUCTION

MODEL	REFRIGERATED STORAGE AREA	2L BOTTLE CAPACITY	ACCESS FRONT	ACCESS REAR	STORAGE DRAWERS	CHASSIS CONSTRUCTION
IL-C-DRW-A006	0.33m <sup>2</sup>	24 Bottles 257 x 131 x 90mm (HxWxD)	Drawer/Front Flap	N/A	1	Stainless 304 and mild steel

### DIMENSIONS


MODEL	H x W x D mm (Uncrated)	MASS (Uncrated)	Estimated H x W x D mm (Crated) <sup>2</sup>	Estimated MASS (Crated) <sup>2</sup>	Estimated CUBIC VOLUME (Crated) <sup>2</sup>
IL-C-DRW-A006	846 x 700 x 738	115 kg	1050 x 750 x 830	158 kg	0.62m <sup>3</sup>

<sup>2</sup>Crated weights and dimensions vary. Please contact us for information on your shipment.

#### Installation note:

Model cavity dimensions: IL-C-DRW-A006 model requires 866mm x 710mm x 725mm. (see product manual for installation guide).

**UNOBSTRUCTED AIRFLOW MUST BE MAINTAINED TO ENSURE UNIT PERFORMANCE AND TO MAINTAIN WARRANTY.**

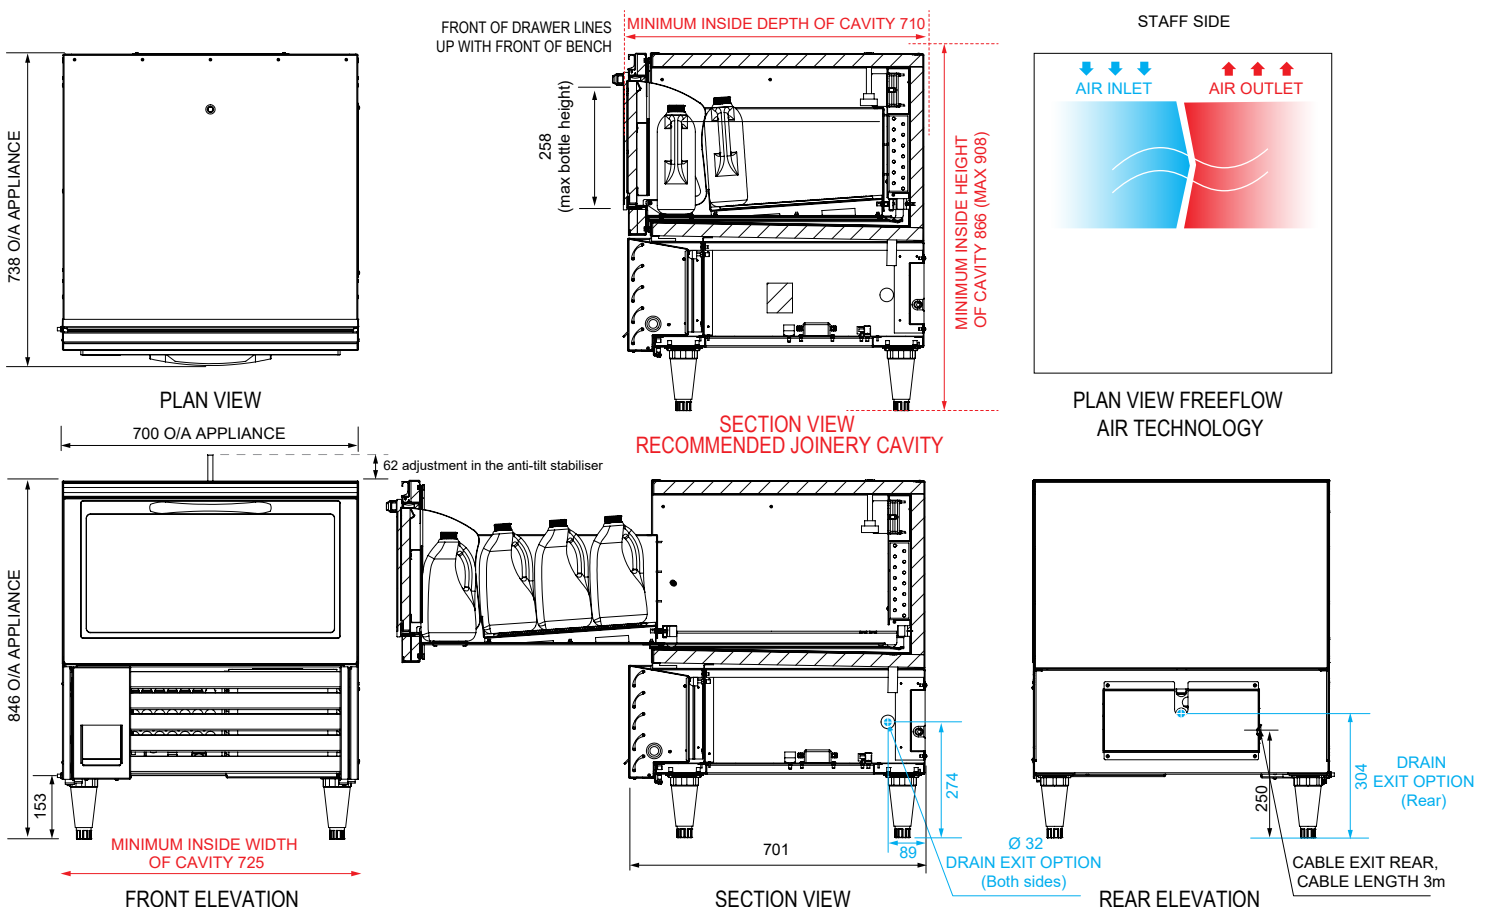

More information including technical data and installation guidelines is available from the Product Manual published on our website.

In line with our policy to continually develop, improve and support our products, Future Products Group Ltd reserves the right to change specifications and design without notice.

Have a question? Please email us at [sales@fpgworld.com](mailto:sales@fpgworld.com) or visit [www.fpgworld.com](http://www.fpgworld.com) for full contact details for your region.

