



**600mm WIDTH
1400mm HEIGHT
BOTTLE CHILLER
SQUARE FREESTANDING**

MODELS

MODEL	CABINET RANGE	CABINET TEMP.	PROFILE	REFRIGERATION	CABINET WIDTH	CABINET HEIGHT	CABINET DEPTH	ACCESS FRONT	INSTALLATION
IN-BC06-A003-00	Idis	Refrigerated	Square	Integral	617mm	1457mm	698mm	Open Front	Freestanding

OPTIONS (Factory Fitted)

- Buffer rails (F)
- Castors (F)
- Custom colour or branding (F)
- 30mm ticket strip (F)

ACCESSORIES

- Magazine racks (A)
- Gravity feed system (A)

OVERVIEW

The **Idis bottle chiller** delivers improved merchandising and performance through the use of doorless operation. Created for checkout and fast lane impulse, Idis is a high capacity bottle/can chiller with a small footprint. Optional magazine racks on sides and ambient top display, allows for a wide range of products.

FEATURES

- **High energy efficiency - 0.80 kWh per hour average**
- Energy efficient moving air refrigeration system maintains +2°C - +4°C
- Fully integral refrigeration system
- Energy efficient with auto condensate removal and EC fans
- 50,000 hour LED lighting in cabinet sides
- Easy to Clean - cabinets can be cleaned and serviced with many parts operator removable for simple safe access
- Engineering excellence and heavy duty build quality providing years of trouble free operation
- Automatic intelligent active defrost cycle
- All shelves are adjustable in height and can easily be moved up or down
- 78 x 330ml can capacity
- 60 x 600ml buddy bottle capacity



SHOWING : IDIS 600mm BOTTLE CHILLER, WITH DOUBLE GLAZED GLASS ENDS

ENVIRONMENTAL TEST CONDITIONS	CLIMATE CLASS 3 25°C / 60% RH	CORE PRODUCT TEMPERATURE	+2°C - +4°C 
-------------------------------	----------------------------------	--------------------------	---

FPG refrigerated & controlled ambient food display cabinets are designed to meet & exceed:

- International safety standards for electrical appliances: IEC 60335-1, IEC 60335-2-89, & the equivalent country-specific standards including AS/NZS, BS EN & UL 471.
- International standards for electromagnetic compatibility/emissions: CISPR 14-1, & the equivalent country-specific standards including AS/NZS CISPR & BS EN 55014-1.
- Essential safety requirements: AS/NZS 3820 & AS/NZS 4417.
- Energy efficiency for refrigerated appliances: MEPS (Australia/New Zealand).





**600mm WIDTH
1400mm HEIGHT
BOTTLE CHILLER
SQUARE FREESTANDING**

SPECIFICATIONS

REFRIGERATION DATA

MODEL	REFRIGERATION	ENVIRONMENTAL TEST CONDITIONS	CORE PRODUCT TEMP. RANGE	REFRIGERANT	REFRIGERANT CHARGE	VALVES	CONDENSATE REMOVAL
IN-BC06-A003-00	Integral	Climate Class 3 - 25°C / 60% RH	+2°C - +4°C	R134A	See serial label	Capillary	Auto

ELECTRICAL DATA

MODEL	VOLTAGE	PHASE	CURRENT	kWh per hour (average)	IP RATING	MAINS		LED LIGHTING		
						CONNECTION	CONNECTION PLUG	LIFETIME	LUX	COLOUR
IN-BC06-A003-00	220-240 V	Single	5.5 A	0.80	IP 22	3 metre 3 core cable	10 amp 3 pin plug	50,000 hr LED	~2000	Natural

DISPLAY

MODEL	DISPLAY AREA	No. OF SHELVES	ACCESS - FRONT	ACCESS - REAR	330ml CAN CAPACITY	600ml BOTTLE CAPACITY	CONSTRUCTION
IN-BC06-A003-00	0.4m ²	2 + Base	Open front	N/A	78 Cans	60 Buddy Bottles	304 Stainless Steel


DIMENSIONS

MODEL	H x W x D mm (Uncrated)	MASS (Uncrated)	Estimated H x W x D mm (Crated)*	Estimated MASS (Crated)*	Estimated CUBIC VOLUME (Crated)*
IN-BC06-A003-00	1457 x 617 x 698	124 kg	1595 x 800 x 800	195 kg	1.02 m ³

*Crated weights and dimensions vary. Please contact us for information on your shipment.

Installation note:

Unobstructed airflow must be maintained to ensure unit performance and to maintain warranty.

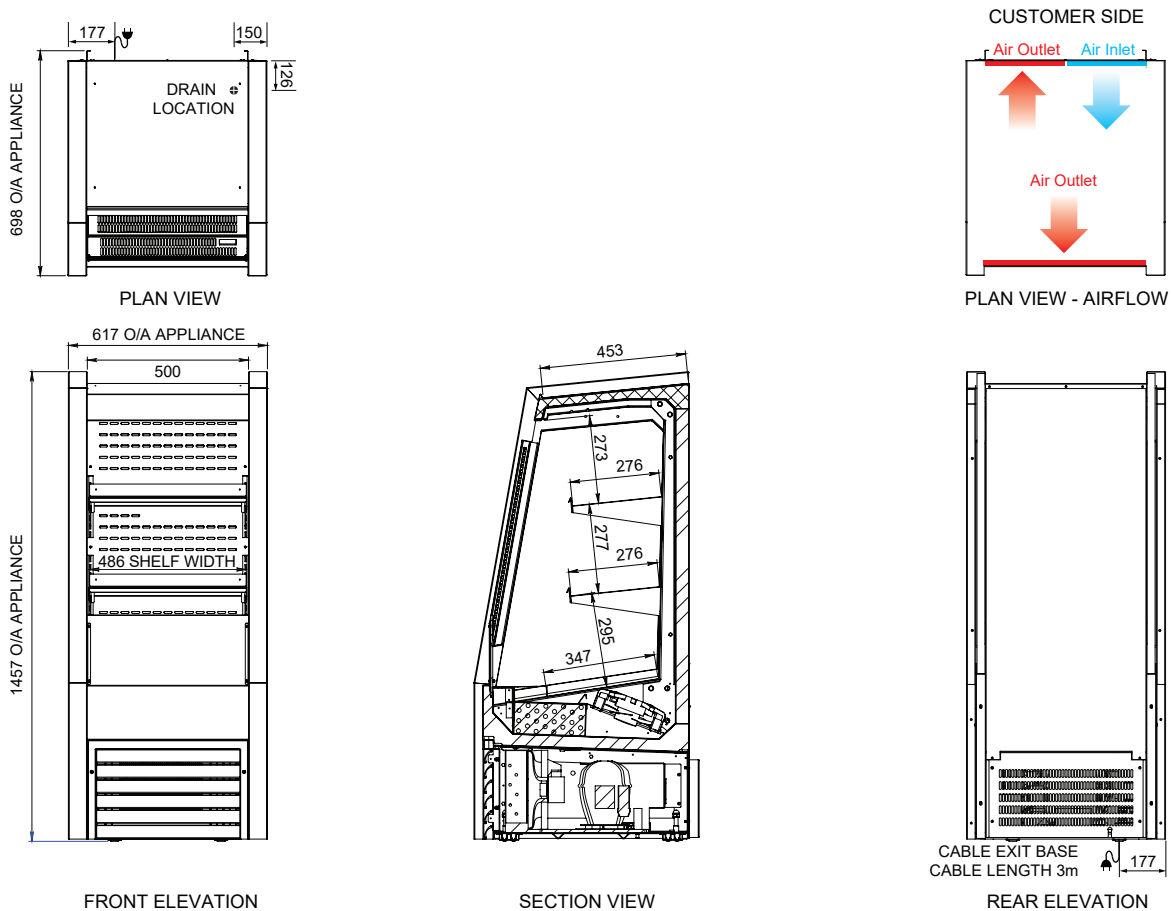

More information including technical data and installation guidelines is available from the Product Manual. Product Manuals are available from our website - WWW.FPGWORLD.COM

In line with our policy to continually develop, improve and support our products, Future Products Group Ltd reserves the right to change specifications and design without notice.

Have a question? Please email us at sales@fpgworld.com or visit WWW.FPGWORLD.COM for full contact details for your region.