



## INLINE SERIES - 4000 AMBIENT 1500mm CURVED IN COUNTER

### MODELS

- IN-4A15-CU-FF-IC | 4000 Series ambient 1500mm curved, with fixed front glass, in counter
- IN-4A15-CU-SD-IC | 4000 Series ambient 1500mm curved, with sliding glass doors, in counter

### OPTIONS [F=Factory Fitted]

- Rear door mirror application (F)
- End glass mirror application (F)

### ACCESSORIES [A=Accessory]

- Small goods tray (A)
- Toughened glass shelves (A)
- Angled base shelf (A)
- Thermal divider panels (A)
- Glass shelves (A)
- Rear deck assembly with no bag and tong holder (A)
- Rear deck assembly with 1 x bag and 2 x tong holders (A)

### OVERVIEW


Created for the busy food service business wanting to display a large quantity or wide variety of food. The 4000 Series cabinets are proven for 85 door openings an hour while still maintaining core product temperatures. The lighting and merchandising features are designed to create impact and increase sales. This low energy consumption unit, keeps product fresher for longer. The cabinets come ready to plug in making installation quick and easy. The Inline 4000 construction allows for smart counter integration options of either a recessed, countertop mounting or freestanding display.

### FEATURES

- High energy efficiency - 0.09 kWh per hour average
- Cabinet operating at ambient temperature
- Sliding doors (staff side) and fixed front or sliding doors options (customer side)
- Three adjustable shelves and base for product display
- 50,000 hour LED lighting to cabinet top and shelves
- Unique shelf mounted ticket strip front and rear
- Fan assist air circulation to introduce fresh air into the cabinet
- Also available as a on counter model or a freestanding model with a chassis



### KEY SELLING FEATURES

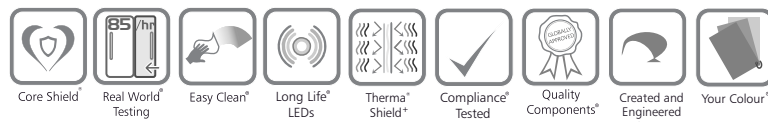

SHOWING : 4000 SERIES AMBIENT 1500mm CURVED, WITH FIXED FRONT, IN COUNTER

IN-4A15-CU-FF-IC	CLIMATE CLASS	N max 32°C / 70% RH	TEMPERATURE RANGE	Ambient
IN-4A15-CU-SD-IC				

Designed to meet and exceed the following compliances and approvals : NSF, EN 55014, EN55014-1, EN 55014-2, EN 61000, EN 61000-3-2, EN 61000-3-3, IEC 60335, IEC 60335-1.



VIEW ONLINE AT [FPGWORLD.COM](http://FPGWORLD.COM)



## INLINE SERIES - 4000 AMBIENT 1500mm CURVED IN COUNTER

### SPECIFICATIONS

#### Ambient Data

	CLIMATE CLASS	CORE PRODUCT - TEMP RANGE
IN-4A15-CU-FF-IC	N max 32°C / 70% RH	Ambient
IN-4A15-CU-SD-IC	N max 32°C / 70% RH	Ambient

#### Electrical Data

	VOLTAGE	PHASE	CURRENT	kWh per hour [average]	MAINS CONNECTION	MAINS CONNECTION PLUG	IP RATING	LED LIGHTING
IN-4A15-CU-FF-IC	220-240 V	Single	0.63 A	0.09 kWh per hour	3 metre 3 core cable	10 amp, 3 pin plug	IP 22	50,000 hr LED
IN-4A15-CU-SD-IC	220-240 V	Single	0.63 A	0.09 kWh per hour	3 metre 3 core cable	10 amp, 3 pin plug	IP 22	50,000 hr LED

#### Display

	DISPLAY AREA	NO. OF SHELVES	ACCESS - FRONT	ACCESS - REAR	CONSTRUCTION
IN-4A15-CU-FF-IC	2.0m <sup>2</sup>	3 + Base	Fixed front	Sliding doors	304 Stainless Steel
IN-4A15-CU-SD-IC	2.0m <sup>2</sup>	3 + Base	Sliding doors	Sliding doors	304 Stainless Steel

#### Dimensions [Uncrated and Crated]

	H x W x D mm [Uncrated]	MASS [Uncrated]	H x W x D mm [Crated]	MASS [Crated]	CUBIC VOLUME [Crated]
IN-4A15-CU-FF-IC	1405 x 1503 x 774	185 kg	1565 x 1577 x 848	280 kg	2.09m <sup>3</sup>
IN-4A15-CU-SD-IC	1405 x 1503 x 774	185 kg	1565 x 1577 x 848	280 kg	2.09m <sup>3</sup>


#### Installation note:

Model cutout dimensions:


- IN-4A15-CU-FF-IC and IN-4A15-CU-SD-IC models require 1480mm x 760mm benchtop cutout. Joinery height 560mm (see product manual for installation guide)

In line with policy to continually develop and improve it's products, Future Products Group reserves the right to change specifications and design without notice.


For more information and technical data, including installation documents, please refer to the website - [www.fpgworld.com](http://www.fpgworld.com)

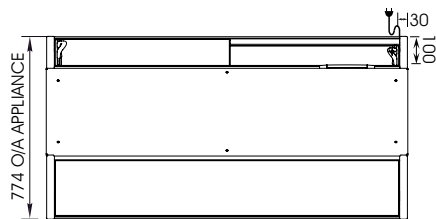


PLAN VIEW

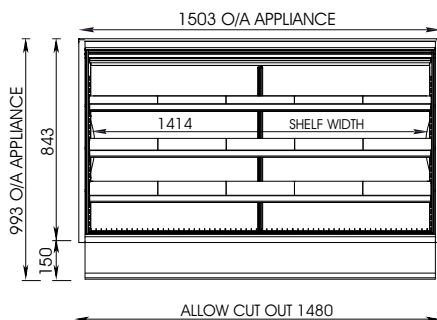

FRONT ELEVATION

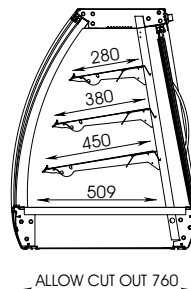

SECTION VIEW

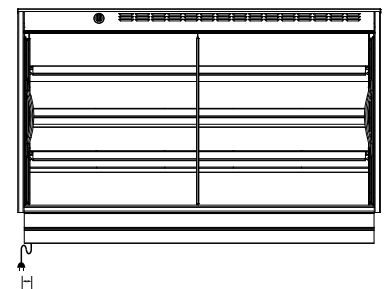

REAR ELEVATION