



INLINE SERIES - 5000 HEATED 800mm CURVED FREESTANDING

MODELS

- IN-5H08-CU-SD-FS | 5000 Series heated 800mm curved freestanding, with sliding glass doors
- IN-5H08-CU-TD-FS | 5000 Series heated 800mm curved freestanding, with a tilt glass door

OPTIONS [F=Factory Fitted]

- Lockable castors (F)
- Stainless steel base surround (F)
- Joinery base surround (F)

ACCESSORIES [A=Accessory]

- Small goods tray for dry product (A)
- Pies chutes and dividers (A)
- Small goods tray for wet product
- Stainless steel flat trays (A)
- Angled base shelf (A)
- Thermal divider panels (A)
- Rear deck assembly with no bag and tong holder (A)
- Rear deck assembly with 1 x bag and 2 x tong holders (A)

OVERVIEW

Inline 5000 Series food and drink display cabinets are premier heavy-duty cabinets, trusted by multi-national corporate clients worldwide. This Cabinet Series is tested to 120 door openings an hour while still maintaining core product temperatures. Increased capacity, robust design and individual shelf lighting enhance food product offerings. Line ups of **Inline 5000 Series** freestanding display cabinets support any combination of heated, refrigerated, and controlled ambient variants. Developed using FPG's world class design expertise. Optimised for energy efficiency and to deliver the lowest total cost of ownership over the life of the cabinet. A truly premium display cabinet.

FEATURES

- High energy efficiency - 1.04 kWh per hour average
- Cabinet operating temperature range +30°C - +90°C
- Recommended core product temperature > +65°C
- Sliding doors (staff side) and sliding doors or tilt door options (customer side)
- Three adjustable shelves and base for product display
- 25,000 hour LED lighting to cabinet top and shelves
- Low wattage high density elements for even temperature distribution
- Adjustable 150mm feet (+30mm adjustment)
- Unique shelf mounted ticket strip front and rear
- Toughened safety glass
- Designed to integrate into custom joinery



SHOWING : 5000 SERIES HEATED 800mm CURVED FREESTANDING, WITH TILT DOOR

IN-5H08-CU-SD-FS	ENVIRONMENTAL TEST CONDITIONS	22°C / 65% RH	MAX TEMPERATURE RANGE	+30°C-+90°C
IN-5H08-CU-TD-FS				

FPG heated food display cabinets are designed to meet and exceed:

- International safety standards for electrical heated appliances: IEC 60335-1, IEC 60335-2-49, IEC 60335-2-50, and the equivalent country-specific standards including AS/NZS and BS EN.
- International standards for electromagnetic compatibility/emissions: CISPR 14-1, and the equivalent county-specific standards including AS/NZS CISPR and BS EN 55014-1.
- Essential safety requirements: AS/NZS 3820 and AS/NZS 4417.

Please contact FPG to discuss your requirements for meeting country-specific standards.



FPGWORLD.COM



INLINE SERIES - 5000 HEATED 800mm CURVED FREESTANDING

SPECIFICATIONS

Heated Data

	ENVIRONMENTAL TEST CONDITIONS	RECOMMENDED CORE PRODUCT TEMP	MAX TEMP RANGE	HEATING
IN-5H08-CU-SD-FS	22°C / 65% RH	> +65°C	+30°C - +90°C	High density low wattage element
IN-5H08-CU-TD-FS	22°C / 65% RH	> +65°C	+30°C - +90°C	High density low wattage element

Electrical Data

	VOLTAGE	PHASE	CURRENT	kWh per hour [average]	MAINS CONNECTION	MAINS CONNECTION PLUG	IP RATING	LED LIGHTING
IN-5H08-CU-SD-FS	220-240 V	Single	6.8 A	1.04 kWh per hour	3 metre 3 core cable	10 amp, 3 pin plug	IP 22	25,000 hr LED
IN-5H08-CU-TD-FS	220-240 V	Single	6.8 A	1.04 kWh per hour	3 metre 3 core cable	10 amp, 3 pin plug	IP 22	25,000 hr LED

Display

	DISPLAY AREA	NO. OF SHELVES	ACCESS - FRONT	ACCESS - REAR	CONSTRUCTION
IN-5H08-CU-SD-FS	1.17m ²	3 + Base	Sliding doors	Sliding doors	304 Stainless Steel
IN-5H08-CU-TD-FS	1.17m ²	3 + Base	Tilt door	Sliding doors	304 Stainless Steel

Dimensions [Uncrated and Crated]

	H x W x D mm [Uncrated]	MASS [Uncrated]	Estimated H x W x D mm [Crated]*	Estimated MASS [Crated]*	Estimated CUBIC VOLUME [Crated]*
IN-5H08-CU-SD-FS	1443 x 807 x 789	118 kg	1603 x 881 x 865	184 kg	1.22m ³
IN-5H08-CU-TD-FS	1443 x 807 x 789	118 kg	1603 x 881 x 865	184 kg	1.22m ³

*Crated weights and dimensions vary. Please contact us for information on your shipment.


Installation note:

Model cutout dimensions:


- IN-5H08-CU-SD and IN-5H08-CU-TD models require 760 x 725mm benchtop cutout. Joinery height 603mm (see product manual for installation guide)

In line with policy to continually develop and improve its products, Future Products Group reserves the right to change specifications and design without notice.


For more information and technical data, including installation documents, please refer to the website - www.fpgworld.com




PLAN VIEW

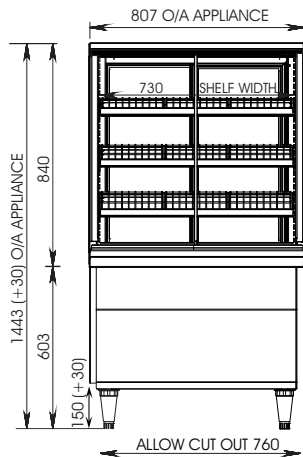

FRONT ELEVATION

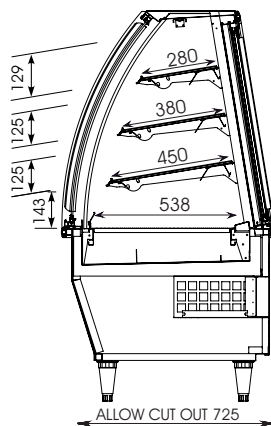

SECTION VIEW

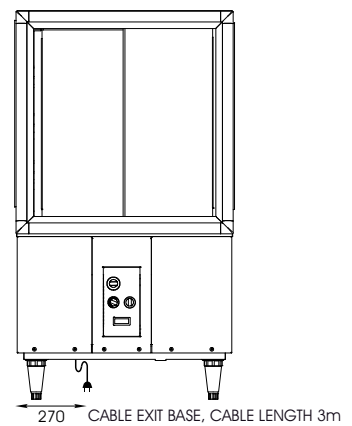

REAR ELEVATION