



RANGE	ISOFORM COUNTER
TEMPERATURE	HEATED
MODEL	I-CSO-H-06-08
FRONT	SQUARE/OPEN FRONT
INSTALLATION	FREESTANDING
HEIGHT	1454mm
WIDTH	608mm
DEPTH	725mm

TEMPERATURE RANGE	+65°C – +80°C
RECOMMENDED CORE PRODUCT TEMPERATURE	+65°C – +80°C
ENVIRONMENTAL TEST CONDITIONS	25°C / 60% RH

FEATURES


-  **High energy efficiency: 1.7 kWh per hour (average)**
-  **Cabinet operating temperature range +65°C - +80°C**
Recommended core product temperature +65°C - +80°C

- Sleek black cabinet frame with silver pinstripe (default) on front, rear and doors

Open Front Heated Display

-  Four full-width display levels: Three fixed **IWave** shelves and base are full cabinet width to support maximum display capacity
-  Each **IWave** shelf is brushed stainless steel and fitted with ticket strips front and rear: 30mm (height) with caution decal applied. Each shelf is supplied with 2 x 260mm width removable aluminium drip trays, powdercoated black (default)
-  25,000 hour LED lighting system (colour: natural) at 2758 lumens per metre in cabinet top and shelves

Operational Excellence

-  Swing Door (staff side) and open front (customer side)
-  FPG **IWave** heating technology uses low-wattage quartz infrared elements complemented with a heating coil in the base for even temperature distribution and extended shelf life
-  Shelf lighting plugs into cabinet sockets to enable easy replacement
-  Safer for consumers - display surfaces are maintained < +65°C and the internal air temperature is lower than in many fan-assisted cabinets
-  Constructed from stainless and mild steel with fully double-glazed, toughened safety glass for maximum energy efficiency, climate control and durability
- Fitted with adjustable 150mm legs (+30mm adjustment)



Showing : Isoform Counter heated 600mm freestanding open front with **IWave** shelves

OPTIONS & ACCESSORIES

Contact a [FPG Sales Representative](#) for our full range, including:

- Pinstripe colour
- Drip trays: Colour and woodprint options available
- Stainless steel product trays with three sides
- Stainless steel pie chutes
- Branded decals
- Rear door or end glass mirror application
- LED lighting colour: Warm white
- Adjustable 100mm legs (+25mm adjustment), lockable castors or unidirectional rollers
- Angled base insert
- Custom joinery solution



HEATED DATA

MODEL	TEMPERATURE RANGE	RECOMMENDED CORE PRODUCT TEMPERATURE	ENVIRONMENTAL TEST CONDITIONS	IWAVE HEATING
I-CSO-H-06-08	+65°C - +80°C	+65°C - +80°C	25°C / 60% RH	Low-wattage infrared quartz elements

ELECTRICAL DATA

MODEL	VOLTAGE	PHASE	CURRENT	E24H (kWh)	kWh per hour (average)	IP RATING	MAINS		LED LIGHTING		
							CONNECTION	CONNECTION PLUG ¹	HOURS	LUMENS	COLOUR
I-CSO-H-06-08	220-240 V	Single	7.4 A	40.8	17	IP 22	3 metre 3 core cable	10 amp 3 pin plug	25,000	2758 per metre	Natural

¹Please advise country to change plug specification.

CAPACITY, ACCESS & CONSTRUCTION

MODEL	DISPLAY AREA	LEVELS	ACCESS FRONT	ACCESS REAR	REAR DOORS	CHASSIS CONSTRUCTION
I-CSO-H-06-08	0.79 m ²	3 Shelves + base	Open front	Swing door	1	Stainless 304 and mild steel


DIMENSIONS

MODEL	H x W x D mm (Uncrated)	MASS (Uncrated)
I-CS-H-09-08	1454 x 608 x 725	- kg


Crated weights and dimensions vary. Please contact us for information on your shipment.

Installation note:


Model cutout dimensions: I-CSO-H-06-08 models require 618 x 730mm benchtop cutout. Joinery height 620mm (see product manual for installation guide).




PLAN VIEW

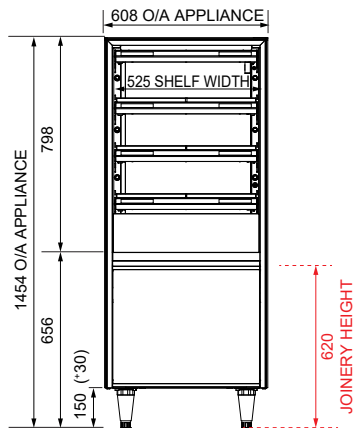

FRONT ELEVATION

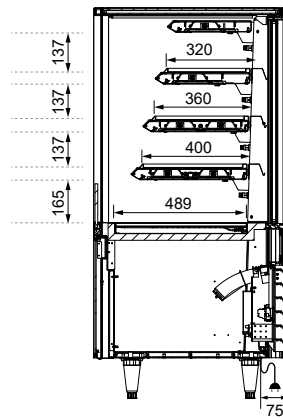

SECTION VIEW

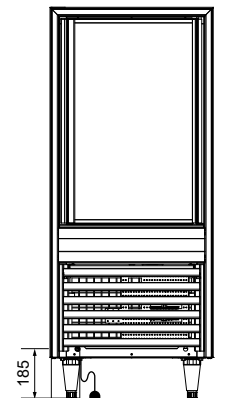

REAR ELEVATION

More information including technical data and installation guidelines is available from the Product Manual published on our website.

In line with our policy to continually develop, improve and support our products, Future Products Group Ltd reserves the right to change specifications and design without notice.

Have a question? Please email us at sales@fpgworld.com or visit www.fpgworld.com for full contact details for your region.

