

## TOWER - REFRIGERATED 800mm CABINET

### MODELS

- IN-TC08 | Tower Refrigerated 800mm Cabinet

### OPTIONS [F=Factory Fitted]

- 30mm ticket strip (F)
- Auto condensate removal (F)

### OVERVIEW

The Tower cabinet maximises your food and beverage display without losing valuable floor space. This unit has massive capacity and is packed with innovative features to help promote your product, like Super Slim glass, long life LEDs and a high and low level door system. This attractive cabinet enhances product appeal to maximise your sales and ensure your product is safe and fresh.




SHOWING : TOWER REFRIGERATED 800mm CABINET

### FEATURES

- High energy efficiency - 0.59 kWh per hour average
- Maintains +2°C - +4°C core product temperature
- Best in class 50,000 hour LED to all shelves
- Fully double glazed for energy efficiency
- Upper and lower sliding rear door sets to staff side
- Adjustable shelves
- Self contained refrigeration system with EC fans for maximum energy efficiency
- High internal average relative humidity [80%] for longer product life in optimum condition
- Rollers on base allow for easy mobility

### KEY SELLING FEATURES

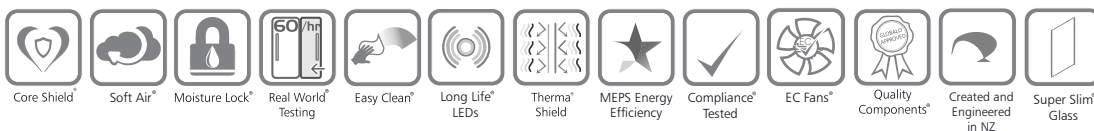

IN-TC08	ENVIRONMENTAL TEST CONDITIONS	CLIMATE CLASS 3 25°C / 60% RH	TEMPERATURE RANGE	+2°C - +4°C
---------	-------------------------------	----------------------------------	-------------------	-------------

Designed to meet and exceed the following compliances and approvals : NSF, EN 55014, EN55014-1, EN 55014-2, EN 61000, EN 61000-3-2, EN 61000-3-3, IEC 60335, IEC 60335-1, IEC 60335-2-89.



VIEW ONLINE AT [FPGWORLD.COM](http://FPGWORLD.COM)



## TOWER - REFRIGERATED 800mm CABINET

### SPECIFICATIONS

#### Refrigeration Data

	ENVIRONMENTAL TEST CONDITIONS	CORE PRODUCT TEMP RANGE	REFRIGERANT	REFRIGERANT CHARGE	VALVES	CONDENSATE REMOVAL
IN-TC08	Climate Class 3 - 25°C / 60% RH	+2°C - +4°C	R134A	See serial label	Capillary	Auto*/Manual

\*Option or Accessory

#### Electrical Data

	VOLTAGE	PHASE	CURRENT	kWh per hour [average]	MAINS CONNECTION	MAINS CONNECTION PLUG	IP RATING
IN-TC08	220-240 V	Single	4.1 A	0.59 kWh per hour	3 metre 3 core cable	10 amp, 3 pin plug	IP 22

#### Display

	DISPLAY AREA	NO. OF SHELVES	ACCESS - FRONT	ACCESS - REAR	DOOR OPENINGS @ +2°C - +4°C	LED LIGHTING	CONSTRUCTION
IN-TC08	1.78m <sup>2</sup>	5 + Base	Fixed front	Sliding doors	60 openings per hour	50,000 hr LED	304 Stainless Steel

#### Dimensions [Uncrated and Crated]


	H x W x D mm [Uncrated]	MASS [Uncrated]	H x W x D mm [Crated]	MASS [Crated]	CUBIC VOLUME [Crated]
IN-TC08	1941 x 801 x 679	220 kg	2101 x 875 x 753	295 kg	1.4m <sup>3</sup>

#### Installation note:


Unobstructed airflow must be maintained to ensure unit performance and maintain warranty

In line with policy to continually develop and improve it's products, Future Products Group reserves the right to change specifications and design without notice.


For more information and technical data, including installation documents, please refer to the website - [www.fpgworld.com](http://www.fpgworld.com)




PLAN VIEW




PLAN VIEW - AIRFLOW

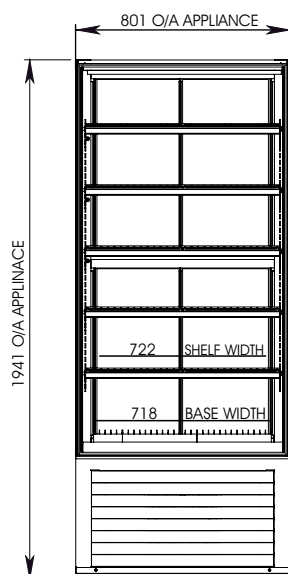

FRONT ELEVATION

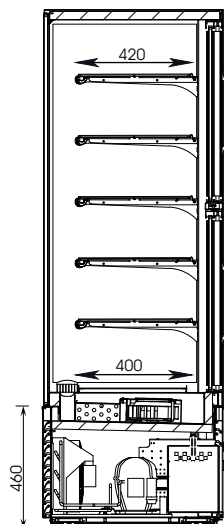

SECTION VIEW

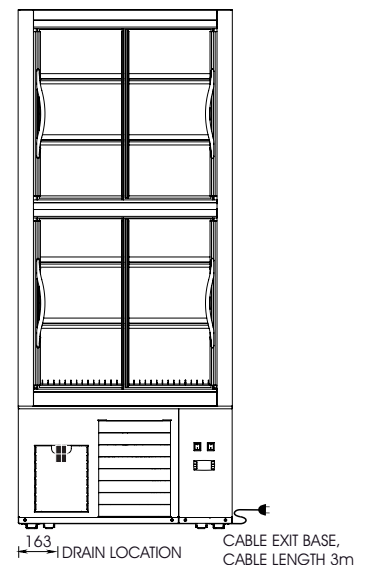

REAR ELEVATION