



FPGWORLD.COM

visair

UPRIGHT 700 OPEN FRONT REFRIGERATED: R290

MODEL	IN-VA07-BXXX
RANGE	VISAIR UPRIGHT
INSTALLATION	FREESTANDING/ROLLERS
FRONT	OPEN FRONT
TEMPERATURE	REFRIGERATED
REFRIGERATION	INTEGRAL, R290
HEIGHT	1431mm
WIDTH	706mm
DEPTH	816mm

CORE PRODUCT TEMPERATURE	+2°C - +4°C
ENVIRONMENTAL TEST CONDITIONS	CLIMATE CLASS 3 25°C / 60% RH
CABINET CLASSIFICATION	3MO

ENERGY EFFICIENCY	
NZ & AU (R449A)	
For Star Rating, please visit reg.energyrating.gov.au/comparator	

FEATURES

- High energy efficiency: 0.65 kWh per hour (average)**
- Maintains an average of +2°C - +4°C core product temperature at Climate Class 3 25°C/60%RH**

Open Front Refrigerated Display

- 4 full-width display levels (3 shelves plus base) - powdercoated black with textured stipple finish
- Pluggable 50,000 hour LED lighting at the cabinet top and each shelf

Operational Excellence

- Constructed from mild steel - powdercoated satin black and fully double glazed glass for maximum energy efficiency, climate control and durability
- High capacity EC (electronically controlled) energy saving and low noise fans
- Electronic controller ensures the cabinet is operating as efficiently as possible
- Cabinet features an 'air curtain' to retain cold air within cabinet
- Configured with a pre-filter - with regular cleaning by operations staff the life of the cabinet can be extended
- Auto condensate removal (ACR)
- Fitted with protective buffer rail at base front and sides
- Fitted with unidirectional rollers and stabilisers



Showing : Visair Upright refrigerated 700mm freestanding open front with exterior and interior powdercoated black

OPTIONS & ACCESSORIES

Contact a [FPG Sales Representative](#) for our full range, including:

- Full-width shelf options (2 or 4)
- Ticket strip 30mm
- Custom colour or branded decals
- Castors
- Night curtain



Please contact FPG to discuss your requirements for meeting country-specific standards.

FPGWORLD.COM



FPGWORLD.COM

visair

UPRIGHT 700 OPEN FRONT REFRIGERATED: R290

REFRIGERATION DATA

MODEL	CORE PRODUCT TEMPERATURE	ENVIRONMENTAL TEST CONDITIONS	REFRIGERATION	REFRIGERANT	REFRIGERANT CHARGE	CONDENSATE REMOVAL
IN-VA07-BXXX	+2°C - +4°C	Climate Class 3 - 25°C / 60% RH	Integral	R290	See serial label	ACR

ELECTRICAL DATA

MODEL	VOLTAGE	PHASE	CURRENT	E24H (kWh)	kWh per hour (average)	IP RATING	MAINS		LED LIGHTING		
							CONNECTION	CONNECTION PLUG ¹	HOURS	LUMENS	COLOUR
IN-VA07-BXXX	220-240 V	Single	6.2 A	15.83	0.65	IP 22	3 metre 3 core cable	10 AMP 3 pin plug	50,000	1500 per metre	Natural

¹Please advise country to change plug specification.

CAPACITY, ACCESS & CONSTRUCTION

MODEL	DISPLAY AREA	LEVELS	ACCESS FRONT	ACCESS REAR	CHASSIS CONSTRUCTION
IN-VA07-BXXX	0.86 m ²	3 Shelves + Base	Open front	Fixed	Mild & stainless steel


DIMENSIONS

MODEL	H x W x D mm (Uncrated)	MASS (Uncrated)
IN-VA07-BXXX	1431 x 706 x 816	- kg


Crated weights and dimensions vary. Please contact us for information on your shipment.

Installation note:


UNOBSTRUCTED AIRFLOW MUST BE MAINTAINED TO ENSURE UNIT PERFORMANCE AND TO MAINTAIN WARRANTY. ALLOW NO LESS THAN 200mm CLEARANCE ABOVE CABINET FOR AIRFLOW.




PLAN VIEW




PLAN VIEW - AIRFLOW

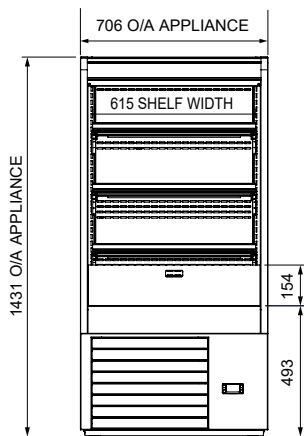

FRONT ELEVATION

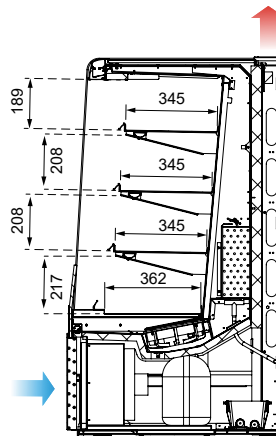

SECTION VIEW

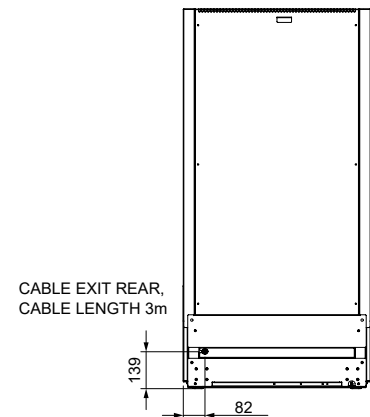

REAR ELEVATION

More information including technical data and installation guidelines is available from the Product Manual published on our website.

In line with our policy to continually develop, improve and support our products, Future Products Group Ltd reserves the right to change specifications and design without notice.

Have a question? Please email us at sales@fpgworld.com or visit www.fpgworld.com for full contact details for your region.



Worldwide contact details: