



FPGWORLD.COM

# visair

## UPRIGHT 1000 OPEN FRONT REFRIGERATED: R290 VSD

RANGE	VISAIR UPRIGHT
TEMPERATURE	REFRIGERATED
MODEL	IN-VA10-B1XX
FRONT	OPEN FRONT
INSTALLATION	FREESTANDING/ROLLERS
REFRIGERATION	INTEGRAL, R290
TECHNOLOGY	VARIABLE-SPEED DRIVER (VSD)
HEIGHT	1480mm
WIDTH	1096mm
DEPTH	830mm

CORE PRODUCT TEMPERATURE	+2°C - +4°C
ENVIRONMENTAL TEST CONDITIONS	CLIMATE CLASS 3 25°C / 60% RH
CABINET CLASSIFICATION	3M1

ENERGY EFFICIENCY	
NZ & AU	
For Star Rating, please visit <a href="http://reg.energyrating.gov.au/comparator">reg.energyrating.gov.au/comparator</a>	

## FEATURES

**Very high energy efficiency: 0.78 kWh per hour (average)**

**Maintains an average of +2°C - +4°C core product temperature at Climate Class 3 25°C/60%RH**

- Robust open front display, powdercoated satin black for a sleek finish

### Open Front Refrigerated Display

- Four full-width display levels: three shelves and base are powdercoated black with textured stipple finish and full cabinet width to support maximum display capacity
- Pluggable 50,000 hour LED lighting system at 1500 lumens per metre in cabinet top and to each shelf
- Base ticket strip: 25mm

### Operational Excellence

- Constructed from stainless and mild steel - powdercoated satin black with fully double-glazed, toughened safety glass for maximum energy efficiency, climate control and durability
- Fitted with high capacity EC (electronically controlled) energy saving and low noise fans
- Variable-speed drive inverter compressor and electronic controller ensure the cabinet is operating as efficiently as possible
- Cabinet features an 'air curtain' to retain cold air within cabinet
- Configured with a pre-filter - with regular cleaning by operations staff the life of the cabinet can be extended
- Auto Condensate Removal (ACR)
- Fitted with protective black buffer rail at base front and sides
- Fitted with unidirectional rollers and adjustable stabilisers



Showing : Visair Upright refrigerated 1000mm freestanding open front with three shelves and base

## OPTIONS & ACCESSORIES

Contact a [FPG Sales Representative](#) for our full range, including:

- Full-width shelf options: Two or four
- Split shelving options: Two, three or four split shelves on each side
- Shelf: Colour and woodprint options available
- Shelf ticket strip: 30mm
- Custom colour
- Branded decals
- Lockable castors
- Gravity feed system
- Night curtain
- Custom joinery solution



Please contact FPG to discuss your requirements for meeting country-specific standards.

FPGWORLD.COM



FPGWORLD.COM

# visair

## UPRIGHT 1000 OPEN FRONT REFRIGERATED: R290 VSD

### REFRIGERATION DATA

MODEL	CORE PRODUCT TEMPERATURE	ENVIRONMENTAL TEST CONDITIONS	REFRIGERATION	REFRIGERANT	CONDENSATE REMOVAL
IN-VA10-B1XX	+2°C - +4°C	Climate Class 3 - 25°C / 60% RH	Integral - VSD	R290	ACR

### ELECTRICAL DATA

MODEL	VOLTAGE	PHASE	CURRENT	E24H (kWh)	kWh per hour (average)	IP RATING	MAINS		LED LIGHTING		
							CONNECTION	CONNECTION PLUG <sup>1</sup>	HOURS	LUMENS	COLOUR
IN-VA10-B1XX	220-240 V	Single	8.6 A	18.72	0.78	IP X0	3 metre 3 core cable	10 amp 3 pin plug	50,000	1500 per metre	Natural

<sup>1</sup>Please advise country to change plug specification.

### CAPACITY, ACCESS & CONSTRUCTION

MODEL	DISPLAY AREA	LEVELS	ACCESS FRONT	ACCESS REAR	CHASSIS CONSTRUCTION
IN-VA10-B1XX	1.4 m <sup>2</sup>	3 Shelves + Base	Open front	N/A	Stainless 304 and mild steel


### DIMENSIONS

MODEL	H x W x D mm (Uncrated)	MASS (Uncrated)
IN-VA10-B1XX	1480 x 1096 x 830	236 kg


Crated weights and dimensions vary. Please contact us for information on your shipment.

**Installation note:** Designed to be installed as a stand alone unit.


**UNOBSTRUCTED AIRFLOW MUST BE MAINTAINED TO ENSURE UNIT PERFORMANCE AND TO MAINTAIN WARRANTY. ALLOW NO LESS THAN 200mm CLEARANCE ABOVE CABINET FOR AIRFLOW. CABINETS WITH R290 REFRIGERANT REQUIRE A MINIMUM ROOM SIZE OF ~18m<sup>2</sup> AT CEILING HEIGHT OF 2.2m**




PLAN VIEW




PLAN VIEW - AIRFLOW

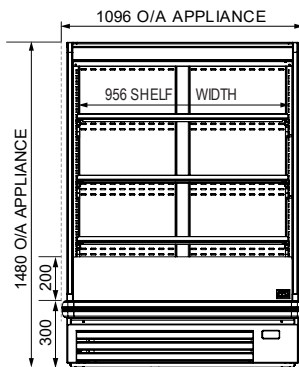

SECTION VIEW

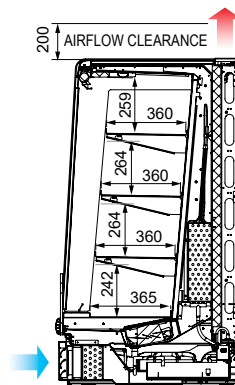

FRONT ELEVATION

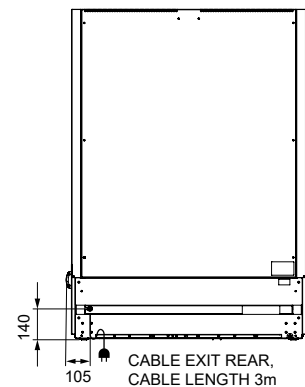

REAR VIEW

More information including technical data and installation guidelines is available from the Product Manual published on our website.

In line with our policy to continually develop, improve and support our products, Future Products Group Ltd reserves the right to change specifications and design without notice.

Have a question? Please email us at [sales@fpgworld.com](mailto:sales@fpgworld.com) or visit [www.fpgworld.com](http://www.fpgworld.com) for full contact details for your region.



Worldwide contact details: