



FPGWORLD.COM

visair

UPRIGHT 2000 OPEN FRONT REFRIGERATED: R449A/R290

MODEL	IN-VA20-AXXX	IN-VA20-BXXX
RANGE	VISAIR UPRIGHT	
INSTALLATION	FREESTANDING/ROLLERS	
FRONT	OPEN FRONT	
TEMPERATURE	REFRIGERATED	
REFRIGERATION	INTEGRAL, R449A	INTEGRAL, R290 ¹
HEIGHT	1480mm	
WIDTH	2109mm	
DEPTH	830mm	

¹Subject to the availability of R290 horizontal scroll compressors.

CORE PRODUCT TEMPERATURE	+2°C - +4°C
ENVIRONMENTAL TEST CONDITIONS	CLIMATE CLASS 3 25°C / 60% RH
CABINET CLASSIFICATION	3M1

ENERGY EFFICIENCY
NZ & AU (R449A)
The Visair Upright Refrigerated 2000 (IN-VA20) is comprised of 2x Visair Upright Refrigerated 1000 (IN-VA10), each with its own independently powered refrigeration system.
For the Star Rating, please search for 'IN-VA10' at reg.energyrating.gov.au/comparator

FEATURES

- High energy efficiency: 2.7 kWh per hour (average)**
- Maintains an average of +2°C - +4°C core product temperature at Climate Class 3 25°C/60%RH**

Open Front Refrigerated Display

- 4 full-width display levels (6 shelves plus base) - powdercoated black with textured stipple finish
- Pluggable 50,000 hour LED lighting at the cabinet top and each shelf

Operational Excellence

- Constructed from mild steel - powdercoated satin black and fully double glazed glass for maximum energy efficiency, climate control and durability
- Two energy efficient scroll compressors with active defrost technology installed to service each half of the cabinet.
- High capacity EC (electronically controlled) energy saving, low noise fans
- Electronic controller installed in each half of the cabinet ensures the cabinet is operating as efficiently as possible
- Cabinet features an 'air curtain' to retain cold air within cabinet
- Configured with a pre-filter - with regular cleaning by operations staff the life of the cabinet can be extended
- Auto condensate removal (ACR)
- Fitted with protective buffer rail at base front and sides
- Fitted with unidirectional rollers and stabilisers



Showing : Visair Upright refrigerated 2000mm freestanding open front with exterior and interior powdercoated black

OPTIONS & ACCESSORIES

Contact a [FPG Sales Representative](#) for our full range, including:

- Alternative refrigerants
- Full-width shelf options (2 or 4)
- Split shelving options: 2 or 3 split shelves on each side
- Shelf trays: Toughened safety glass or mild steel. Colour and wood print options available for steel shelving
- Ticket strip 30mm
- Custom colour or branded decals
- Castors
- Night curtain



Please contact FPG to discuss your requirements for meeting country-specific standards.

FPGWORLD.COM



FPGWORLD.COM

visair

UPRIGHT 2000 OPEN FRONT REFRIGERATED: R449A/R290

REFRIGERATION DATA

MODEL	CORE PRODUCT TEMPERATURE	ENVIRONMENTAL TEST CONDITIONS	REFRIGERATION	REFRIGERANT	REFRIGERANT CHARGE	CONDENSATE REMOVAL
IN-VA20-AXXX	+2°C - +4°C	Climate Class 3 - 25°C / 60% RH	Integral	R449A	See serial label	ACR
IN-VA20-BXXX				R290 ¹		

¹Subject to the availability of R290 horizontal scroll compressors.

ELECTRICAL DATA

MODEL	VOLTAGE	PHASE	CURRENT	E24H (kWh)	kWh per hour (average)	IP RATING	MAINS		LED LIGHTING		
							CONNECTION	CONNECTION PLUG ²	HOURS	LUMENS	COLOUR
IN-VA20-AXXX	220-240 V	Single	2 X 8.7 A	64.8	2.7	IP 22	2 x 3 metre 3 core cable	2 x 10 amp 3 pin plug	50,000	1500 per metre	Natural
IN-VA20-BXXX			2 X 8.4 A	51.36	2.14						

²Please advise country to change plug specification.

CAPACITY, ACCESS & CONSTRUCTION

MODEL	DISPLAY AREA	LEVELS	ACCESS FRONT	ACCESS REAR	CHASSIS CONSTRUCTION
IN-VA20-XXXX	2.77 m ²	3 Shelves + Base	Open front	Fixed	Mild & stainless steel


DIMENSIONS

MODEL	H x W x D mm (Uncrated)	MASS (Uncrated)
IN-VA20-XXXX	1480 x 2109 x 830	460 kg


Crated weights and dimensions vary. Please contact us for information on your shipment.

Installation note:


UNOBSTRUCTED AIRFLOW MUST BE MAINTAINED TO ENSURE UNIT PERFORMANCE AND TO MAINTAIN WARRANTY. ALLOW NO LESS THAN 200mm CLEARANCE ABOVE CABINET FOR AIRFLOW. CABINETS WITH R290 REFRIGERANT REQUIRE A MINIMUM ROOM SIZE OF ~18m² AT A CEILING HEIGHT OF 2.2m.

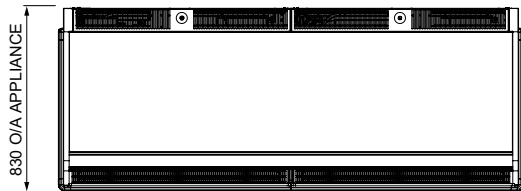


PLAN VIEW

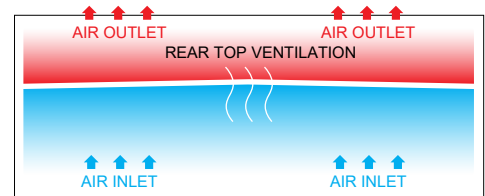


PLAN VIEW - AIRFLOW

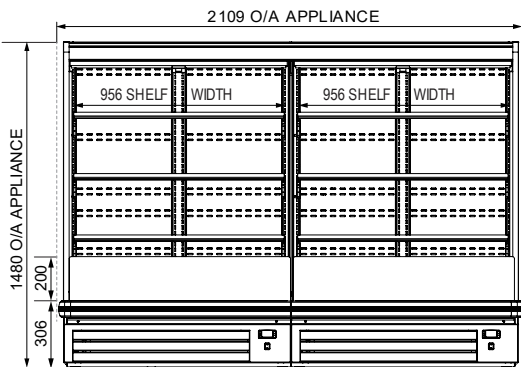

SECTION VIEW

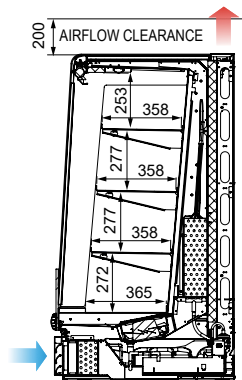

FRONT ELEVATION

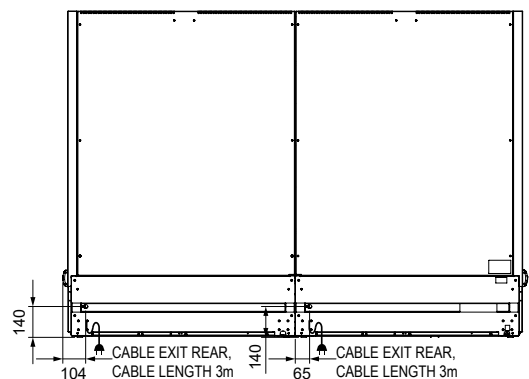

REAR VIEW

More information including technical data and installation guidelines is available from the Product Manual published on our website.

In line with our policy to continually develop, improve and support our products, Future Products Group Ltd reserves the right to change specifications and design without notice.

Have a question? Please email us at sales@fpgworld.com or visit www.fpgworld.com for full contact details for your region.



Worldwide contact details: