



FPGWORLD.COM

# visair

## UPRIGHT 600 OPEN FRONT - TALL HEIGHT HEATED WITH 2 SHELVES

|              |                      |
|--------------|----------------------|
| MODEL        | IN-VH06-A003         |
| RANGE        | VISAIR UPRIGHT       |
| INSTALLATION | FREESTANDING/ROLLERS |
| FRONT        | OPEN FRONT           |
| TEMPERATURE  | HEATED               |
| HEIGHT       | 1900mm               |
| WIDTH        | 660mm                |
| DEPTH        | 736mm                |

|                                      |               |
|--------------------------------------|---------------|
| TEMPERATURE RANGE                    | +30°C – +85°C |
| RECOMMENDED CORE PRODUCT TEMPERATURE | > 65°C        |
| ENVIRONMENTAL TEST CONDITIONS        | 25°C / 60% RH |

## FEATURES

**High energy efficiency: 1.2 kWh per hour (average)**

**Consistently maintains hot product >+65°C**

- Smart steel frame powdercoated black with black trim and fittings. Internal cabinet rear is brushed stainless steel

### Open Front Heated Display

- Display area starts at 733 mm (height) for easier access to hot product
- 3 full-width display levels: 2 fixed **IWave** quartz infrared shelves and heated base
- Each **IWave** shelf is brushed stainless steel and fitted with x1 575mm width removable aluminium drip trays, ticketing insert 30mm (height), and Hot warning adhesives
- Pluggable 25,000 hour LED lighting at the cabinet top and each shelf

### Operational Excellence

- Easy 'plug and play' installation
- FPG **IWave** heating technology uses low wattage quartz infrared elements complemented with a heating coil in the base for even temperature distribution and extended shelf life
- Fitted with an electronic controller for energy efficiency
- Safer for consumers - display surfaces are maintained < +65°C and the internal air temperature is lower than in many fan-assisted cabinets
- No noise pollution - this cabinet runs silently
- Constructed from mild and stainless steel. Fully double-glazed glass for maximum energy efficiency, temperature control and durability
- Fitted with protective black buffer rail, stainless steel toe kick and rubber floor skirt at base front and sides
- Fitted with unidirectional rollers and stabilisers



IWave

Showing : Visair Upright heated 600mm open front tall height cabinet with 2 IWave shelves

## OPTIONS & ACCESSORIES

Contact a [FPG Sales Representative](#) for our full range, including:

- Custom colour or branded decals
- Castors



Please contact FPG to discuss your requirements for meeting country-specific standards.

FPGWORLD.COM



FPGWORLD.COM

# visair

## UPRIGHT 600 OPEN FRONT - TALL HEIGHT HEATED WITH 2 SHELVES

### HEATED DATA

| MODEL        | TEMPERATURE RANGE | RECOMMENDED CORE PRODUCT TEMPERATURE | ENVIRONMENTAL TEST CONDITIONS | I/WAVE HEATING                       |
|--------------|-------------------|--------------------------------------|-------------------------------|--------------------------------------|
| IN-VH06-A003 | +30°C - +85°C     | > +65°C                              | 25°C / 60% RH                 | Low wattage infrared quartz elements |

### ELECTRICAL DATA

| MODEL        | VOLTAGE   | PHASE  | CURRENT | E24H (kWh) | kWh per hour (average) | IP RATING | MAINS                |                              | LED LIGHTING |       |         |
|--------------|-----------|--------|---------|------------|------------------------|-----------|----------------------|------------------------------|--------------|-------|---------|
|              |           |        |         |            |                        |           | CONNECTION           | CONNECTION PLUG <sup>1</sup> | HOURS        | LUX   | COLOUR  |
| IN-VH06-A003 | 220-240 V | Single | 8.4 A   | 28.8       | 1.2                    | IP 22     | 3 metre 3 core cable | 10 amp 3 pin plug            | 25,000       | ~2000 | Natural |

<sup>1</sup>Please advise country to change plug specification.


### CAPACITY, ACCESS & CONSTRUCTION

| MODEL        | DISPLAY AREA        | LEVELS           | ACCESS FRONT | ACCESS REAR | CHASSIS CONSTRUCTION   |
|--------------|---------------------|------------------|--------------|-------------|------------------------|
| IN-VH06-A003 | 0.70 m <sup>2</sup> | 2 Shelves + Base | Open front   | Fixed       | Mild & stainless steel |


### DIMENSIONS

| MODEL        | H x W x D mm (Uncrated) | MASS (Uncrated) |
|--------------|-------------------------|-----------------|
| IN-VH06-A003 | 1900 x 660 x 736        | 130 kg          |


Crated weights and dimensions vary. Please contact us for information on your shipment.




PLAN VIEW

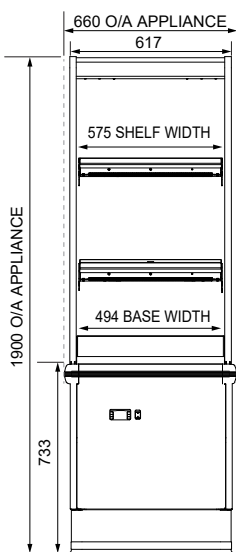

FRONT ELEVATION

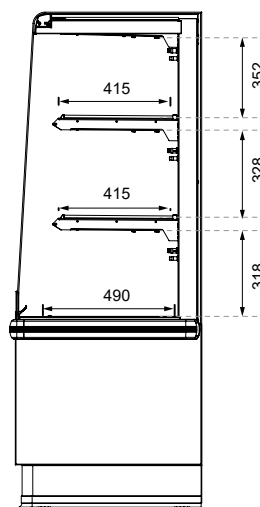

SECTION VIEW

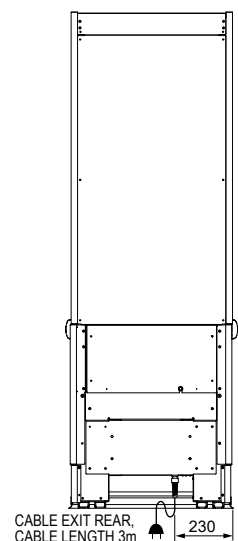

REAR ELEVATION

More information including technical data and installation guidelines is available from the Product Manual published on our website.

In line with our policy to continually develop, improve and support our products, Future Products Group Ltd reserves the right to change specifications and design without notice.

Have a question? Please email us at [sales@fpgworld.com](mailto:sales@fpgworld.com) or visit [www.fpgworld.com](http://www.fpgworld.com) for full contact details for your region.



Worldwide contact details: