



FPGWORLD.COM

INLINE

5000 SERIES 1200 CURVED/OPEN FRONT HEATED

| | |
|--------------|--------------------|
| RANGE | INLINE 5000 SERIES |
| TEMPERATURE | HEATED |
| MODEL | IN-5H12-CU-OF-FS |
| FRONT | CURVED/OPEN FRONT |
| INSTALLATION | FREESTANDING |
| HEIGHT | 1443mm |
| WIDTH | 1207mm |
| DEPTH | 789mm |

| | |
|--------------------------------------|---------------|
| TEMPERATURE RANGE | +65°C – +85°C |
| RECOMMENDED CORE PRODUCT TEMPERATURE | +65°C – +80°C |
| ENVIRONMENTAL TEST CONDITIONS | 22°C / 65% RH |

FEATURES

- High energy efficiency: 1.86 kWh per hour (average)**
- Cabinet operating temperature range +65°C - +85°C**
Recommended core product temperature +65°C – +80°C
- Smart open front display with double-glazed glass encased in brushed stainless steel frame

Open Front Heated Display

- Four full-width display levels: three fixed **IWave** quartz infrared shelves and heated base
- Each **IWave** shelf is brushed stainless steel and is fitted with ticket strips front and rear: 30mm (height), with caution decal applied. Each shelf is supplied with 2x 565mm width removable aluminium drip trays
- 25,000 hour LED lighting system at 2758 lumens per metre in cabinet top and to each shelf

Operational Excellence

- Sliding doors (staff side) and open front (customer side)
- FPG **IWave** heating technology uses low-wattage quartz infrared elements complemented with a heating coil in the base for even temperature distribution and extended shelf life
- Fitted with an electronic controller for energy efficiency
- Safer for consumers - display surfaces are maintained < +65°C and the internal air temperature is lower than in many fan-assisted cabinets
- No noise pollution – this cabinet runs silently
- Constructed from stainless and mild steel with fully double-glazed, toughened safety glass for maximum energy efficiency and durability
- Designed to be installed into joinery
- Fitted with adjustable 150mm legs (+30mm adjustment)



IWave

Showing : Inline 5000 Series heated 1200mm curved freestanding open front

OPTIONS & ACCESSORIES

Contact a [FPG Sales Representative](#) for our full range, including:

- Drip trays: Colour and woodprint options available
- Stainless steel product trays with three sides
- Stainless steel pie chutes
- Branded decals
- Rear door or end glass mirror application
- Adjustable 100mm legs (+25mm adjustment), lockable castors or unidirectional rollers
- External stainless steel chassis surround
- Rear deck assemblies
- Custom joinery solution



Indicates sustainability benefits



Please contact FPG to discuss your requirements for meeting country-specific standards.

FPGWORLD.COM

HEATED DATA

| MODEL | TEMPERATURE RANGE | RECOMMENDED CORE PRODUCT TEMPERATURE | ENVIRONMENTAL TEST CONDITIONS | IWAVE HEATING |
|------------------|-------------------|--------------------------------------|-------------------------------|--------------------------------------|
| IN-5H12-CU-OF-FS | +65°C – +85°C | +65°C – +80°C | 22°C / 65% RH | Low-wattage infrared quartz elements |

ELECTRICAL DATA

| MODEL | VOLTAGE | PHASE | CURRENT | E24H (kWh) | kWh per hour (average) | IP RATING | MAINS | | LED LIGHTING | | |
|------------------|-----------|--------|---------|------------|------------------------|-----------|-----------------------|------------------------------|--------------|----------------|---------|
| | | | | | | | CONNECTION | CONNECTION PLUG ¹ | HOURS | LUMENS | COLOUR |
| IN-5H12-CU-OF-FS | 220-240 V | Single | 12.0 A | 44.64 | 1.86 | IP 22 | 3 metre, 3 core cable | 15 amp, 3 pin plug | 25,000 | 2758 per metre | Natural |

¹Please advise country to change plug specification.

CAPACITY, ACCESS & CONSTRUCTION

| MODEL | DISPLAY AREA | LEVELS | ACCESS FRONT | ACCESS REAR | CHASSIS CONSTRUCTION |
|------------------|--------------------|------------------|--------------|---------------|------------------------------|
| IN-5H12-CU-OF-FS | 1.7 m ² | 3 Shelves + Base | Open front | Sliding doors | Stainless 304 and mild steel |


DIMENSIONS

| MODEL | H x W x D mm (Uncrated) | MASS (Uncrated) |
|------------------|-------------------------|-----------------|
| IN-5H12-CU-OF-FS | 1443 x 1207 x 789 | 154 kg |

Crated weights and dimensions vary. Please contact us for information on your shipment.

Installation note:

Model cutout dimensions: IN-5H12-CU-OF-FS models require 1160 x 725mm benchtop cutout. Joinery height 603mm (see product manual for installation guide).

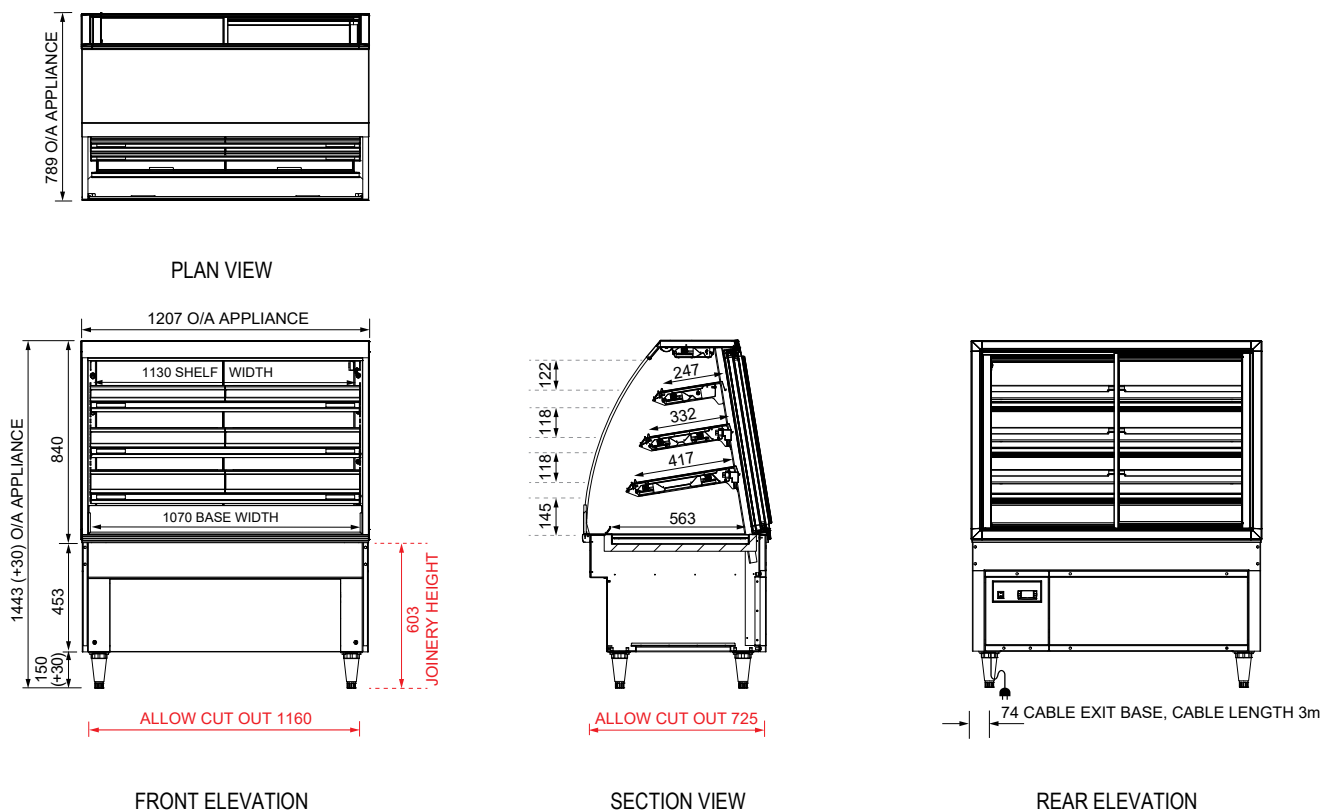

More information including technical data and installation guidelines is available from the Product Manual published on our website.

In line with our policy to continually develop, improve and support our products, Future Products Group Ltd reserves the right to change specifications and design without notice.

Have a question? Please email us at sales@fpgworld.com or visit www.fpgworld.com for full contact details for your region.

