



FPGWORLD.COM

# INLINE

## GN SERIES 3x 1/1 PANS MOBILE HEATED

RANGE	INLINE GN SERIES
TEMPERATURE	HEATED
MODEL	IN-GNH03-M
INSTALLATION	MOBILE
OPERATING-MODES	WET, STEAM, DRY
HEIGHT	942mm (without gantry)
	1300mm (with flat self-serve gantry)
WIDTH	1323mm
DEPTH	974mm

TEMPERATURE RANGE	+75°C - +110°C
RECOMMENDED CORE PRODUCT TEMPERATURE	+65°C - +80°C
ENVIRONMENTAL TEST CONDITIONS	22°C / 65% RH

## FEATURES

- High energy efficiency: 2.5 kWh per hour (average)**
- Cabinet operating temperature range +75°C - +110°C**  
**Recommended core product temperature +65°C - +80°C**

### Mobile Heated Display

- Timeless stainless steel chassis fitted with heavy duty castors to support mobility
- Merchandise with GN pans (accessories)

### Operational Excellence

- Engineering excellence and heavy duty build quality provide years of trouble free operation
- Double-skin insulated well for heat retention
- Energy efficient wet, steam or dry well operational modes
  - For wet and steam mode, waterfill and removal is manual
- With flip-up elements for easy safe access, cabinets can be cleaned and serviced with many parts removable
- Pre-wired for gantry heat lamps and water level indicator
- Onboard control panel: Temperature, Power, Operating Mode

### Gantry (Option)

- Constructed from toughened safety glass and fitted with halogen heat lamps, with 3000 hour warm white lighting



Showing : Inline GN Series Mobile heated 3x 1/1 pans, fitted with flat self-serve gantry (option) and GN pans (accessories)

## OPTIONS & ACCESSORIES

Contact a [FPG Sales Representative](#) for our full range, including:

- Gantries: Flat self-serve, curved self-serve, flat serve-over
- GN pans (various sizes)
- GN dividers
- Tray race
- Side panels with grilles



Please contact FPG to discuss your requirements for meeting country-specific standards.

### HEATED DATA

MODEL	TEMPERATURE RANGE	RECOMMENDED CORE PRODUCT TEMPERATURE	ENVIRONMENTAL TEST CONDITIONS	OPERATING MODES	WATER FILL
IN-GNH03-M	+75°C - +110°C	+65°C - +80°C	22°C / 65% RH	Wet/Steam/Dry	Manual

### ELECTRICAL DATA

MODEL	VOLTAGE	PHASE <sup>1</sup>	CURRENT	E24H (kWh)	kWh per hour (average)	IP RATING	MAINS CONNECTION	HEAT LAMPS	HALOGEN LIGHTING	
									HOURS	COLOUR
IN-GNH03-M	220-240 V	Single	10.5 A	60.0	2.5	IP 22	Plug <sup>2</sup>	N/A	N/A	N/A
GANTRY (Option)	220-240 V	Single	3.9 A	21.6	0.9	IP 22	Wired to GN	3x 300 watt linear halogen	3000	Warm white

<sup>1</sup>Three phase power is also available (see product manual). Please specify power requirements upon order.

<sup>2</sup>Appropriate plug supplied upon specification.

### CAPACITY, ACCESS & CONSTRUCTION

MODEL	DISPLAY AREA (GN PANS)	NO. OF 1/1 PANS <sup>3</sup>	DRAIN DIAMETER	CHASSIS CONSTRUCTION
IN-GNH03-M	0.45 m <sup>2</sup>	Accommodates 3	BSP 3/4"	Stainless 304 and mild steel


<sup>3</sup>Accessory.

### DIMENSIONS WITHOUT GANTRY

MODEL	H x W x D mm (Uncrated)	MASS (Uncrated)
IN-GNH03-M	942 x 1323 x 974	- kg

Crated weights and dimensions vary. Please contact us for information on your shipment.

Elevations show cabinet fitted with flat self-serve gantry (option) and GN pans (accessories), and include other gantry options available.

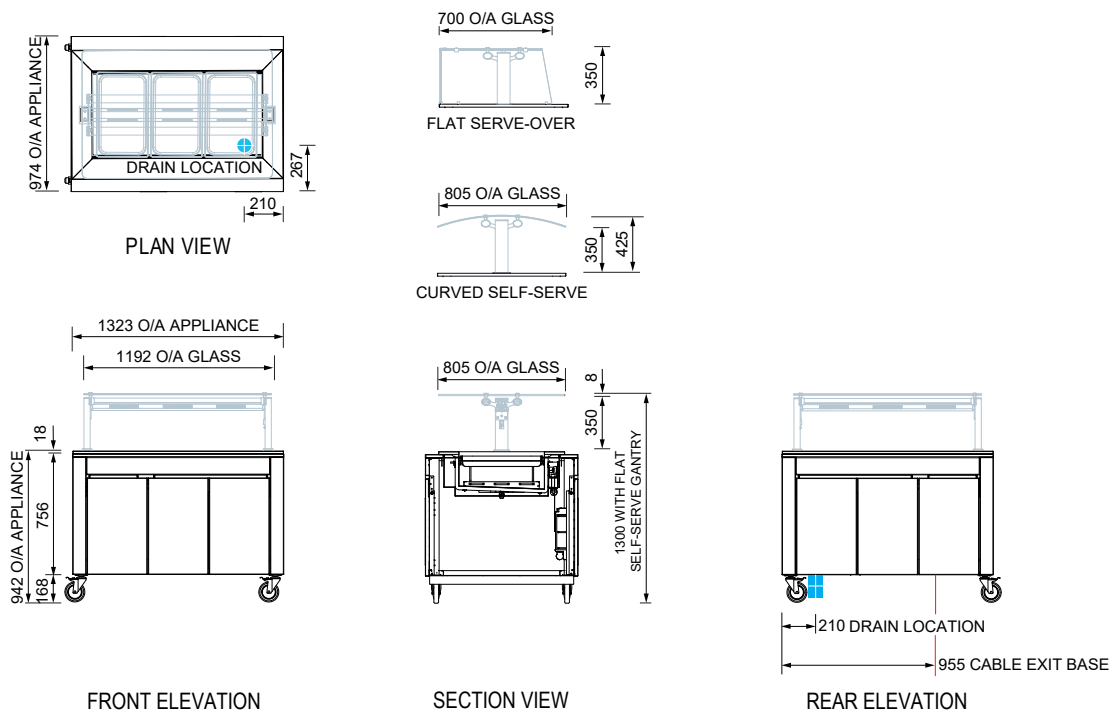

More information including technical data and installation guidelines is available from the Product Manual published on our website.

In line with our policy to continually develop, improve and support our products, Future Products Group Ltd reserves the right to change specifications and design without notice.

Have a question? Please email us at [sales@fpgworld.com](mailto:sales@fpgworld.com) or visit [www.fpgworld.com](http://www.fpgworld.com) for full contact details for your region.

