



FPGWORLD.COM

visair

UPRIGHT 2000 OPEN FRONT REFRIGERATED: R290 VSD

| | |
|---------------|----------------------------|
| RANGE | VISAIR UPRIGHT |
| TEMPERATURE | REFRIGERATED |
| MODEL | IN-VA20-B1XX |
| FRONT | OPEN FRONT |
| INSTALLATION | FREESTANDING/ROLLERS |
| REFRIGERATION | INTEGRAL, R290 |
| TECHNOLOGY | VARIABLE SPEED DRIVE (VSD) |
| HEIGHT | 1480mm |
| WIDTH | 2110mm |
| DEPTH | 830mm |

| | |
|-------------------------------|----------------------------------|
| CORE PRODUCT TEMPERATURE | +2°C - +4°C |
| ENVIRONMENTAL TEST CONDITIONS | CLIMATE CLASS 3 25°C / 60% RH |
| CABINET CLASSIFICATION | 3M1 |

ENERGY EFFICIENCY

The Visair Upright Refrigerated 2000 (IN-VA20) is comprised of 2x Visair Upright Refrigerated 1000 (IN-VA10), each with its own independently powered refrigeration system.

NZ & AU

For the Star Rating, please search for 'IN-VA10' at reg.energyrating.gov.au/comparator

EU

For EPREL Rating, please visit:



FEATURES

High energy efficiency: 1.20 kWh per hour (average)

Maintains an average of +2°C - +4°C core product temperature at Climate Class 3: 25°C/60%RH

- Robust open front display, powdercoated satin black for a sleek finish

Open Front Refrigerated Display

- Four full-width display levels: six adjustable shelves and base are powdercoated black with textured stipple finish and full cabinet width to support maximum display capacity
- Pluggable 50,000 hour LED lighting system at 1500 lumens per metre in cabinet top and to each shelf
- Base ticket strip: 25mm

Operational Excellence

- Constructed from stainless and mild steel - powdercoated satin black with fully double-glazed, toughened safety glass for maximum energy efficiency, climate control and durability
- Fitted with high capacity EC (electronically controlled) energy saving and low noise fans
- Variable speed drive inverter compressor and electronic controller ensure the cabinet is operating as efficiently as possible
- Cabinet features an 'air curtain' to retain cold air within cabinet
- Configured with a pre-filter - with regular cleaning by operations staff the life of the cabinet can be extended
- Auto Condensate Removal (ACR)
- Fitted with protective black buffer rail at base front and sides
- Fitted with unidirectional rollers and adjustable stabilisers



Showing : Visair Upright refrigerated 2000mm freestanding open front with three full-width shelf display levels and base

OPTIONS & ACCESSORIES

Contact a [FPG Sales Representative](#) for our full range, including:

- Full-width shelf options:
Two or four
- Split shelving options:
Two, three or four split shelves on each side
- Shelf: Colour and woodprint options available
- Shelf ticket strip: 30mm
- Custom colour
- Branded decals
- Lockable castors
- Gravity feed system
- Night curtain
- Custom joinery solution



Please contact FPG to discuss your requirements for meeting country-specific standards.

FPGWORLD.COM



FPGWORLD.COM

visair

UPRIGHT 2000
OPEN FRONT
REFRIGERATED: R290 VSD

REFRIGERATION DATA

| MODEL | CORE PRODUCT TEMPERATURE | ENVIRONMENTAL TEST CONDITIONS | REFRIGERATION | REFRIGERANT | A LIMIT | CONDENSATE REMOVAL |
|--------------|--------------------------|---------------------------------|----------------|-------------|---------------------|--------------------|
| IN-VA20-B1XX | +2°C - +4°C | Climate Class 3 - 25°C / 60% RH | Integral - VSD | R290 | 13.4 m ³ | ACR |

ELECTRICAL DATA

| MODEL | VOLTAGE | PHASE | CURRENT | E24H (kWh) | kWh per hour (average) | IP RATING | MAINS | | LED LIGHTING | | |
|--------------|-----------|--------|-----------|------------|------------------------|-----------|--------------------------|------------------------------|--------------|----------------|---------|
| | | | | | | | CONNECTION | CONNECTION PLUG ¹ | HOURS | LUMENS | COLOUR |
| IN-VA20-B1XX | 220-240 V | Single | 2 x 8.6 A | 28.8 | 120 | IP X0 | 2 x 3 metre 3 core cable | 2 x 10 amp 3 pin plug | 50,000 | 1500 per metre | Natural |

¹Please advise country to change plug specification.

CAPACITY, ACCESS & CONSTRUCTION

| MODEL | DISPLAY AREA | LEVELS | ACCESS FRONT | ACCESS REAR | CHASSIS CONSTRUCTION |
|--------------|--------------------|------------------|--------------|-------------|------------------------------|
| IN-VA20-B1XX | 2.8 m ² | 3 Shelves + Base | Open front | N/A | Stainless 304 and mild steel |


DIMENSIONS

| MODEL | H x W x D mm (Uncrated) | MASS (Uncrated) |
|--------------|-------------------------|-----------------|
| IN-VA20-B1XX | 1480 x 2110 x 830 | 460 kg |

Crated weights and dimensions vary. Please contact us for information on your shipment.

Installation note: Designed to be installed as a stand alone unit.

UNOBSTRUCTED AIRFLOW MUST BE MAINTAINED TO ENSURE UNIT PERFORMANCE AND TO MAINTAIN WARRANTY. ALLOW NO LESS THAN 200mm CLEARANCE ABOVE CABINET FOR AIRFLOW.

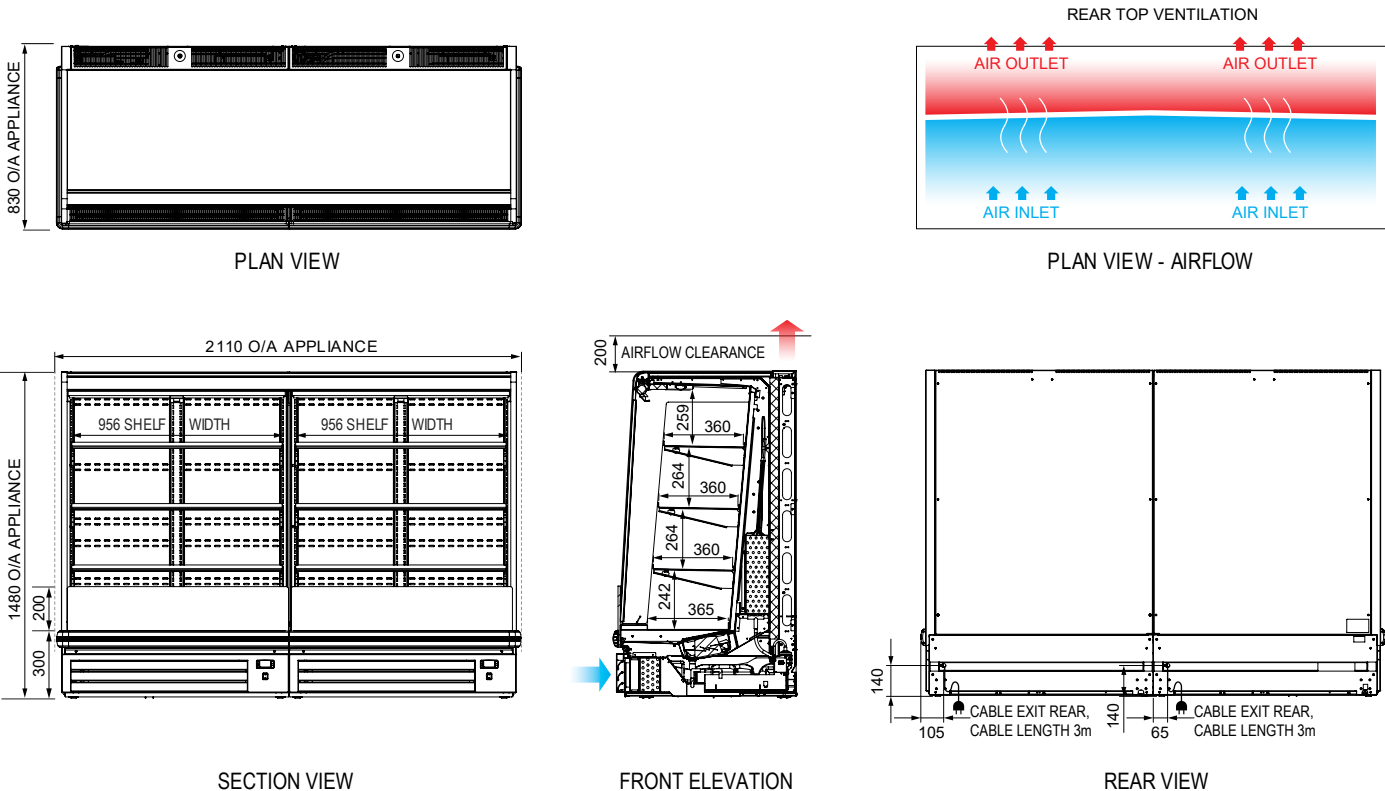

More information including technical data and installation guidelines is available from the Product Manual published on our website.

In line with our policy to continually develop, improve and support our products, Future Products Group Ltd reserves the right to change specifications and design without notice.

Have a question? Please email us at sales@fpgworld.com or visit www.fpgworld.com for full contact details for your region.

