





RANGE	INLINE BARISTA
TEMPERATURE	REFRIGERATED
MODEL	IN-C-DRW-B101
FRONT	DRAWER/FLAP
INSTALLATION	FREESTANDING/LEGS
TECHNOLOGY	VARIABLE SPEED DRIVE (VSD)
REFRIGERATION	INTEGRAL, R290
HEIGHT	846mm
WIDTH	700mm
DEPTH	738mm


CORE PRODUCT TEMPERATURE	+2°C – +4°C
ENVIRONMENTAL TEST CONDITIONS	CLIMATE CLASS 4 30°C / 55% RH
CABINET CLASSIFICATION: REFRIGERATED STORAGE CABINET	4M1

ENERGY EFFICIENCY	
NZ & AU For Star Rating, please visit: reg.energystar.gov.au/ comparator	EU For EPREL Rating, please visit: 



FEATURES

-  **High energy efficiency: 0.04 kWh per hour (average)**
-  **Maintains an average of +2°C - +4°C core product temperature at Climate Class 4: 30°C/55%RH**
-  **Milk maintains temperature < +4°C for two and a half hours with flap open**

Pull Out Drawer and Front Flap

-  Quick and easy access of milk through ergonomic front flap design
- Angled base for gravity feed, with adjustable bottle matting, means stock is always at the front
-  Drawer slides out for ease of stocking

Operational Excellence

- Brushed stainless steel frame
- High storage capacity of 0.33m²
Accommodates 24 2L bottles - 257 x 131 x 90mm (HxWxD)
- Easy installation with an adjustable anti-tilt bolt to stabilise cabinet when the drawer is open
-  Variable speed drive inverter compressor and electronic controller ensure the cabinet is operating as efficiently as possible
-  Configured with a pre-filter - with regular cleaning by operations staff the life of the cabinet can be extended
- Easy access for cleaning
- Splash proof panel over the front controls
- Fitted with legs



REFRIGERATION DATA

MODEL	CORE PRODUCT TEMPERATURE	ENVIRONMENTAL TEST CONDITIONS	REFRIGERATION	REFRIGERANT	A LIMIT	REFRIGERANT CHARGE	CONDENSATE REMOVAL
IN-C-DRW-B101	+2°C – +4°C	Climate Class 4 - 30°C / 55% RH	Integral, VSD	R290	N/A	See serial label	Plumb to waste

ELECTRICAL DATA

MODEL	VOLTAGE	PHASE	CURRENT	E24H (kWh)	kWh per hour (average)	IP RATING	MAINS	
							CONNECTION	CONNECTION PLUG ¹
IN-C-DRW-B101	220-240 V	Single	1.3 A	1.07	0.04	IP 22	3 metre, 3 core cable	10 amp, 3 pin plug

¹Please advise country to change plug specification.

CAPACITY, ACCESS & CONSTRUCTION

MODEL	REFRIGERATED STORAGE AREA	2L BOTTLE CAPACITY	ACCESS FRONT	ACCESS REAR	STORAGE DRAWERS	CHASSIS CONSTRUCTION
IN-C-DRW-B101	0.33m ²	24 Bottles 257 x 131 x 90mm (HxWxD)	Drawer/Front Flap	N/A	1	Stainless 304 and mild steel

DIMENSIONS


MODEL	H x W x D mm (Uncrated)	MASS (Uncrated)	Estimated H x W x D mm (Crated) ²	Estimated MASS (Crated) ²	Estimated CUBIC VOLUME (Crated) ²
IN-C-DRW-B101	846 x 700 x 738	115 kg	1050 x 750 x 830	158 kg	0.62m ³

²Crated weights and dimensions vary. Please contact us for information on your shipment.

Installation note:

Model cavity dimensions: IN-C-DRW-B101 model requires 866mm x 710mm x 725mm. (see product manual for installation guide).

UNOBSTRUCTED AIRFLOW MUST BE MAINTAINED TO ENSURE UNIT PERFORMANCE AND TO MAINTAIN WARRANTY.

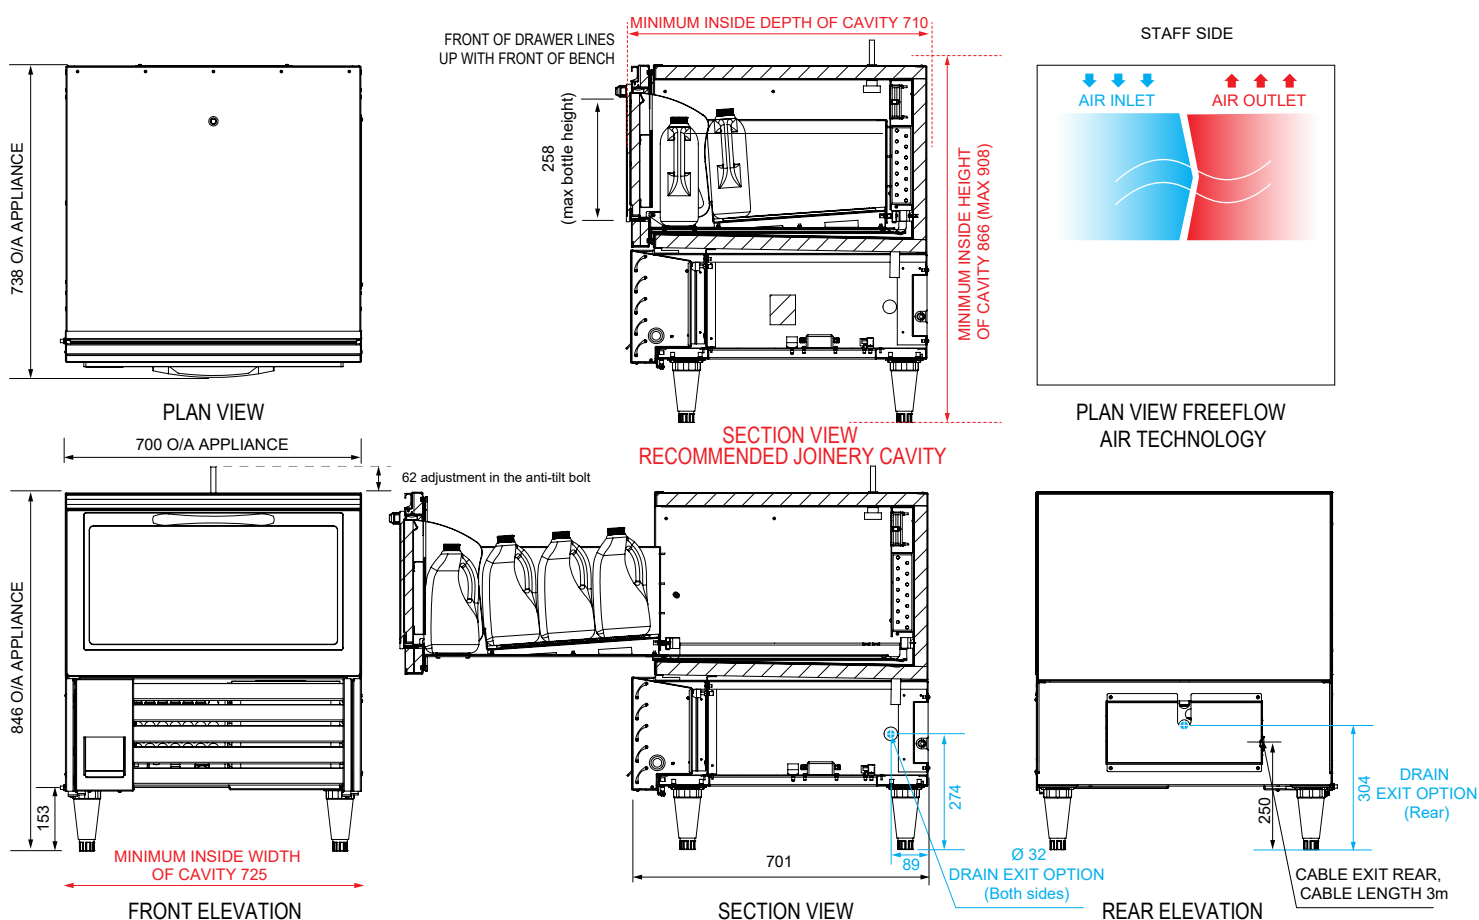

For information on technical data and installation guidelines please contact support@fpgworld.com

In line with our policy to continually develop, improve and support our products, Future Products Group Ltd reserves the right to change specifications and design without notice.

Have a question? Please email us at sales@fpgworld.com or visit www.fpgworld.com for full contact details for your region.

