



RANGE	INLINE GN SERIES
TEMPERATURE	REFRIGERATED
MODEL	IN-GNC04
INSTALLATION	IN-COUNTER
REFRIGERATION	INTEGRAL, R513A
HEIGHT	768mm (without gantry)
	1126mm (with flat self-serve gantry)
WIDTH	1660mm
DEPTH	805mm

CORE PRODUCT TEMPERATURE	+2°C – +4°C
ENVIRONMENTAL TEST CONDITIONS	CLIMATE CLASS 3 25°C / 60% RH
CABINET CLASSIFICATION	3M1







## FEATURES

-  **High energy efficiency: 1.0 kWh per hour (average)**
-  **Maintains an average of +2°C - +4°C core product temperature at Climate Class 3 25°C/60%RH**


### Refrigerated Display

- Designed to be installed into joinery: flush-mount, over-mount or under-mount
- Three levels allowing deck trays to be positioned from 150mm deep below the air curtain
- Merchandise with GN pans (accessories) or use your own displayware
- Reversible deck trays provide ice display option

### Operational Excellence

-  Engineering excellence and heavy duty build quality provide years of trouble free operation
-  Double-skin insulated well
-  Easy to clean - cabinets can be cleaned and serviced with many parts operator removable for simple safe access
-  Automatic intelligent active defrost cycle
-  Manual condensate removal or plumb to waste
-  With regular preventative maintenance by a technician, the life of the cabinet can be extended
- Ability to remote the control panel up to 2m away from the appliance: Temperature, Power, Refrigeration
- Fully integral refrigeration system

### Gantry (Option)

-  Constructed from toughened safety glass and fitted with 50,000 hour LED lighting at 1500 lumens per metre



Showing : Inline GN Series refrigerated in-counter 4x 1/1 pans, fitted with flat self-serve gantry (option) and GN pans (accessories)

## OPTIONS & ACCESSORIES

Contact a [FPG Sales Representative](#) for our full range, including:

- Remote refrigeration /plumb to waste
- Gantries: Flat self-serve, curved self-serve, flat serve-over
- GN pans (various sizes)
- GN dividers
- Auto Condensate Removal (ACR) and vapour extraction fan (integral refrigeration)
- Turnkey buffet solution with joinery



### REFRIGERATION DATA

MODEL	CORE PRODUCT TEMPERATURE	ENVIRONMENTAL TEST CONDITIONS	REFRIGERATION	REFRIGERANT	CONDENSATE REMOVAL
IN-GNC04	+2°C – +4°C	Climate Class 3 - 25°C / 60% RH	Integral	R513A	Manual or plumb to waste/ACR <sup>1</sup>

<sup>1</sup>Option.

### ELECTRICAL DATA

MODEL	VOLTAGE	PHASE	CURRENT	E24H (kW/h)	kWh per hour (average)	IP RATING	MAINS		LED LIGHTING		
							CONNECTION	CONNECTION PLUG <sup>2</sup>	HOURS	LUMENS	COLOUR
IN-GNC04	220-240 V	Single	4.0 A	24.0	100	IP 22	3 metre, 3 core cable	10 amp, 3 pin plug	N/A	N/A	N/A
GANTRY (Option)	220-240 V	Single	0.3 A	1.6	0.07	IP 22	Wired to GN	N/A	50,000	1500 per metre	Natural
ACR (Option)	N/A	N/A	4.0 A	24.0	100	N/A	N/A	N/A	N/A	N/A	N/A

<sup>2</sup>Please advise country to change plug specification.

### CAPACITY, ACCESS & CONSTRUCTION

MODEL	DISPLAY AREA (DECK TRAYS)	NO. OF 1/1 PANS <sup>3</sup>	DECK TRAY LEVELS	DRAIN DIAMETER	CHASSIS CONSTRUCTION
IN-GNC04	0.70 m <sup>2</sup>	Accommodates 4	3 levels	19mm	Stainless 304 and mild steel

<sup>3</sup>Accessory.

### DIMENSIONS WITHOUT GANTRY

MODEL	H x W x D mm (Uncrated)	MASS (Uncrated)
IN-GNC04	768 x 1660 x 805	140 kg


Crated weights and dimensions vary. Please contact us for information on your shipment.

#### Installation note:

Model cutout dimensions: IN-GNC04 models require 1605 x 750mm benchtop cutout for over-mount (see product manual for installation guide for flush and under-mount options).

**UNOBSTRUCTED AIRFLOW MUST BE MAINTAINED TO ENSURE UNIT PERFORMANCE AND MAINTAIN WARRANTY.**

Elevations show cabinet fitted with flat self-serve gantry (option) and GN pans (accessories), and include other gantry options available.

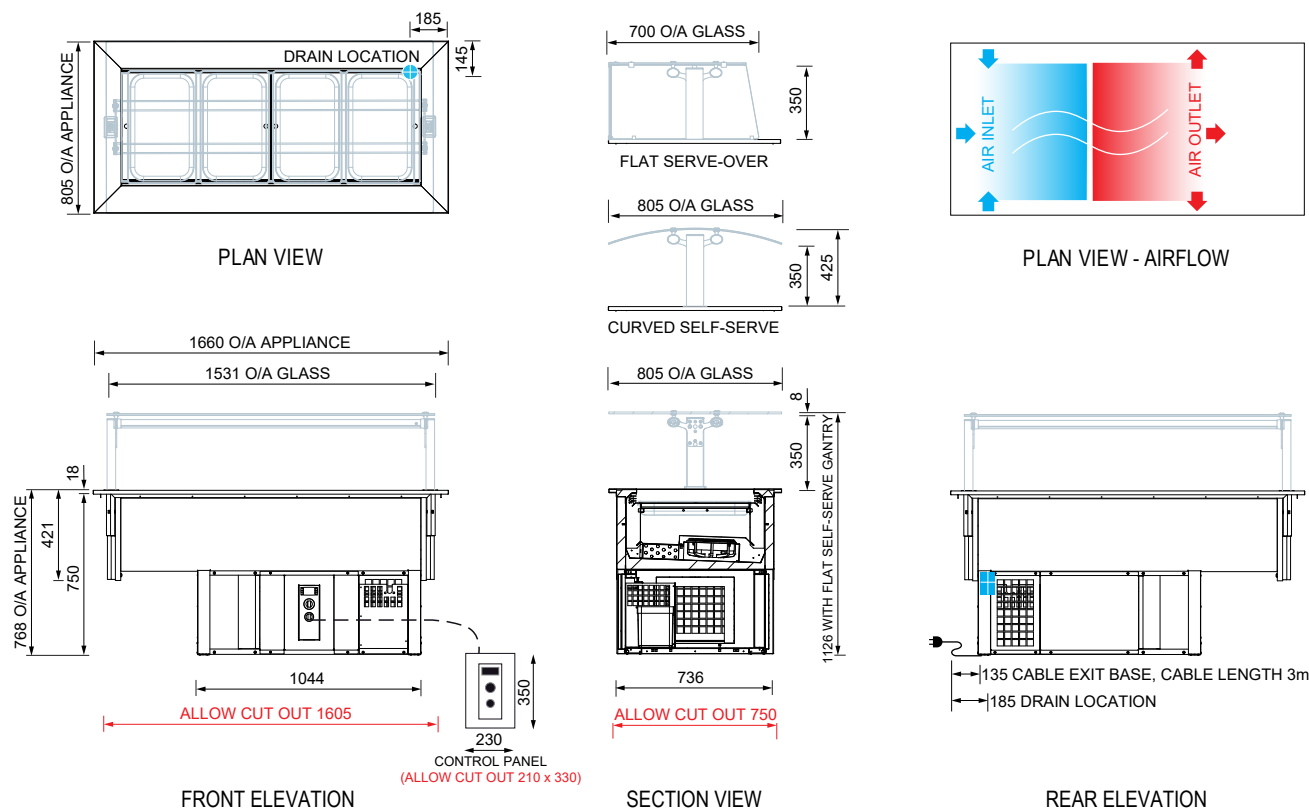

For information on technical data and installation guidelines please contact [support@fpgworld.com](mailto:support@fpgworld.com)

In line with our policy to continually develop, improve and support our products, Future Products Group Ltd reserves the right to change specifications and design without notice.

Have a question? Please email us at [sales@fpgworld.com](mailto:sales@fpgworld.com) or visit [www.fpgworld.com](http://www.fpgworld.com) for full contact details for your region.

