



RANGE	INLINE GN SERIES
TEMPERATURE	REFRIGERATED
MODEL	IN-GNC06-M
INSTALLATION	MOBILE
REFRIGERATION	INTEGRAL, R513A
HEIGHT	942mm (without gantry)
	1300mm (with flat self-serve gantry)
WIDTH	2342mm
DEPTH	974mm

CORE PRODUCT TEMPERATURE	+2°C – +4°C
ENVIRONMENTAL TEST CONDITIONS	CLIMATE CLASS 3 25°C / 60% RH
CABINET CLASSIFICATION	3M1







FEATURES

-  **High energy efficiency: 1.20 kWh per hour (average)**
-  **Maintains an average of +2°C - +4°C core product temperature at Climate Class 3 25°C/60%RH**


Mobile Refrigerated Display

- Timeless stainless steel chassis fitted with heavy duty castors to support mobility
- Three levels allowing deck trays to be positioned from 150mm deep below the air curtain
- Merchandise with GN pans (accessories) or use your own displayware
- Reversible deck pans provide ice display option

Operational Excellence

-  Engineering excellence and heavy duty build quality provide years of trouble free operation
-  Double-skin insulated well
-  Easy to clean - cabinets can be cleaned and serviced with many parts operator removable for simple safe access
-  Automatic intelligent active defrost cycle
-  Manual condensate removal
-  With regular preventative maintenance by a technician, the life of the cabinet can be extended
- Onboard control panel: Temperature, Power, Refrigeration
- Fully integral refrigeration system

Gantry (Option)

-  Constructed from toughened safety glass and fitted with 50,000 hour LED lighting at 1500 lumens per metre



Showing : Inline GN Series Mobile refrigerated 6x 1/1 pans, fitted with flat self-serve gantry (option) and GN pans (accessories)

OPTIONS & ACCESSORIES

Contact a [FPG Sales Representative](#) for our full range, including:

- Gantries: Flat self-serve, curved self-serve, flat serve-over
- GN pans (various sizes)
- GN dividers
- Auto Condensate Removal (ACR)
- Tray race



REFRIGERATION DATA

MODEL	CORE PRODUCT TEMPERATURE	ENVIRONMENTAL TEST CONDITIONS	REFRIGERATION	REFRIGERANT	CONDENSATE REMOVAL
IN-GNC06-M	+2°C – +4°C	Climate Class 3 - 25°C / 60% RH	Integral	R513A	Manual/ACR ¹

¹Option.

ELECTRICAL DATA

MODEL	VOLTAGE	PHASE	CURRENT	E24H (kWh)	kWh per hour (average)	IP RATING	MAINS		LED LIGHTING		
							CONNECTION	CONNECTION PLUG ²	HOURS	LUMENS	COLOUR
IN-GNC06-M	220-240 V	Single	4.6 A	28.8	1.20	IP 22	3 metre, 3 core cable	10 amp, 3 pin plug	N/A	N/A	N/A
GANTRY (Option)	220-240 V	Single	0.4 A	2.4	0.10	IP 22	Wired to GN	N/A	50,000	1500 per metre	Natural
ACR (Option)	N/A	N/A	4.0 A	24.0	1.00	N/A	N/A	N/A	N/A	N/A	N/A

²Please advise country to change plug specification.

CAPACITY, ACCESS & CONSTRUCTION

MODEL	DISPLAY AREA (DECK TRAYS)	NO. OF 1/1 PANS ³	DECK TRAY LEVELS	DRAIN DIAMETER	CHASSIS CONSTRUCTION
IN-GNC06-M	1.04 m ²	Accommodates 6	3 levels	19mm	Stainless 304 and mild steel

³Accessory.

DIMENSIONS WITHOUT GANTRY


MODEL	H x W x D mm (Uncrated)	MASS (Uncrated)
IN-GNC04-M	942 x 2342 x 974	370 kg

Crated weights and dimensions vary. Please contact us for information on your shipment.


Installation note:

UNOBSTRUCTED AIRFLOW MUST BE MAINTAINED TO ENSURE UNIT PERFORMANCE AND MAINTAIN WARRANTY.


Elevations show cabinet fitted with flat self-serve gantry (option) and GN pans (accessories), and include other gantry options available.

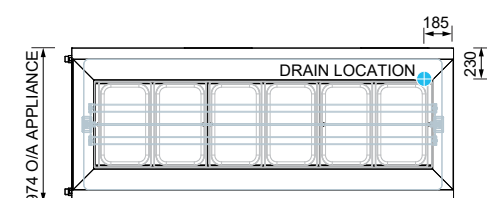


PLAN VIEW




CURVED SELF-SERVE

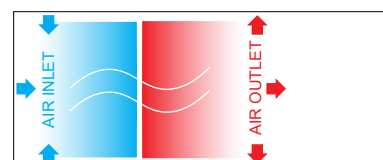


PLAN VIEW - AIRFLOW

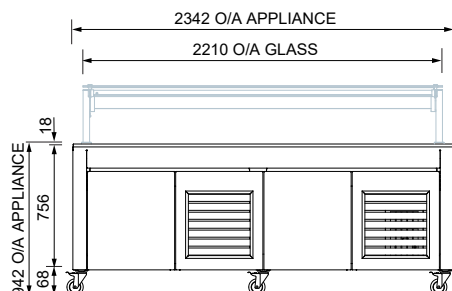

FRONT ELEVATION



SECTION VIEW

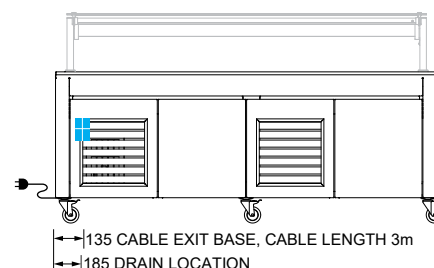

REAR ELEVATION

For information on technical data and installation guidelines please contact support@fpgworld.com

In line with our policy to continually develop, improve and support our products, Future Products Group Ltd reserves the right to change specifications and design without notice.

Have a question? Please email us at sales@fpgworld.com or visit www.fpgworld.com for full contact details for your region.

Worldwide
contact
details:

