



| | |
|---------------|--------------------------------------|
| RANGE | INLINE GN SERIES |
| TEMPERATURE | REFRIGERATED |
| MODEL | IN-GNC06 |
| INSTALLATION | IN-COUNTER |
| REFRIGERATION | INTEGRAL, R513A |
| HEIGHT | 768mm (without gantry) |
| | 1126mm (with flat self-serve gantry) |
| WIDTH | 2340mm |
| DEPTH | 805mm |

| | |
|-------------------------------|----------------------------------|
| CORE PRODUCT TEMPERATURE | +2°C – +4°C |
| ENVIRONMENTAL TEST CONDITIONS | CLIMATE CLASS 3 25°C / 60% RH |
| CABINET CLASSIFICATION | 3M1 |







FEATURES

-  **High energy efficiency: 1.2 kWh per hour (average)**
-  **Maintains an average of +2°C - +4°C core product temperature at Climate Class 3 25°C/60%RH**


Refrigerated Display


- Designed to be installed into joinery: flush-mount, over-mount or under-mount
- Three levels allowing deck trays to be positioned from 150mm deep below the air curtain
- Merchandise with GN pans (accessories) or use your own displayware
- Reversible deck trays provide ice display option

Operational Excellence

-  Engineering excellence and heavy duty build quality provide years of trouble free operation
-  Double-skin insulated well
-  Easy to clean - cabinets can be cleaned and serviced with many parts operator removable for simple safe access
-  Automatic intelligent active defrost cycle
-  Manual condensate removal or plumb to waste
-  With regular preventative maintenance by a technician, the life of the cabinet can be extended
- Ability to remote the control panel up to 2m away from the appliance: Temperature, Power, Refrigeration
- Fully integral refrigeration system

Gantry (Option)

-  Constructed from toughened safety glass and fitted with 50,000 hour LED lighting at 1500 lumens per metre

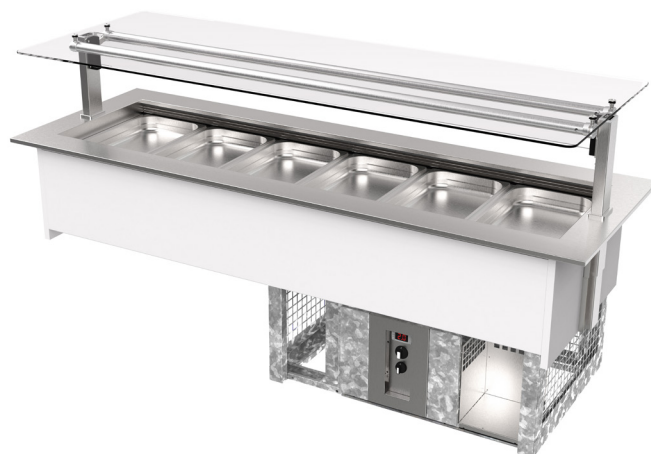

Showing : Inline GN Series refrigerated in-counter 6x 1/1 pans, fitted with flat self-serve gantry (option) and GN pans (accessories)

OPTIONS & ACCESSORIES

Contact a [FPG Sales Representative](#) for our full range, including:

- Remote refrigeration /plumb to waste
- Gantries: Flat self-serve, curved self-serve, flat serve-over
- GN pans (various sizes)
- GN dividers
- Auto Condensate Removal (ACR) and vapour extraction fan (integral refrigeration)
- Turnkey buffet solution with joinery



REFRIGERATION DATA

| MODEL | CORE PRODUCT TEMPERATURE | ENVIRONMENTAL TEST CONDITIONS | REFRIGERATION | REFRIGERANT | CONDENSATE REMOVAL |
|----------|--------------------------|---------------------------------|---------------|-------------|---|
| IN-GNC06 | +2°C – +4°C | Climate Class 3 - 25°C / 60% RH | Integral | R513A | Manual or plumb to waste/ACR ¹ |

¹Option.

ELECTRICAL DATA

| MODEL | VOLTAGE | PHASE | CURRENT | E24H (kWh) | kWh per hour (average) | IP RATING | MAINS | | LED LIGHTING | | |
|-----------------|-----------|--------|---------|------------|------------------------|-----------|-----------------------|------------------------------|--------------|----------------|---------|
| | | | | | | | CONNECTION | CONNECTION PLUG ² | HOURS | LUMENS | COLOUR |
| IN-GNC06 | 220-240 V | Single | 4.6 A | 28.8 | 120 | IP 22 | 3 metre, 3 core cable | 10 amp, 3 pin plug | N/A | N/A | N/A |
| GANTRY (Option) | 220-240 V | Single | 0.4 A | 2.4 | 0.10 | IP 22 | Wired to GN | N/A | 50,000 | 1500 per metre | Natural |
| ACR (Option) | N/A | N/A | 4.0 A | 24.0 | 100 | N/A | N/A | N/A | N/A | N/A | N/A |

²Please advise country to change plug specification.

CAPACITY, ACCESS & CONSTRUCTION

| MODEL | DISPLAY AREA (DECK TRAYS) | NO. OF 1/1 PANS ³ | DECK TRAY LEVELS | DRAIN DIAMETER | CHASSIS CONSTRUCTION |
|----------|---------------------------|------------------------------|------------------|----------------|------------------------------|
| IN-GNC06 | 1.04 m ² | Accommodates 6 | 3 levels | 19mm | Stainless 304 and mild steel |

³Accessory.

DIMENSIONS WITHOUT GANTRY

| MODEL | H x W x D mm (Uncrated) | MASS (Uncrated) |
|----------|-------------------------|-----------------|
| IN-GNC06 | 768 x 2340 x 805 | 190 kg |


Crated weights and dimensions vary. Please contact us for information on your shipment.

Installation note:

Model cutout dimensions: IN-GNC06 models require 2285 x 750mm benchtop cutout for over-mount (see product manual for installation guide for flush and under-mount options).

UNOBSTRUCTED AIRFLOW MUST BE MAINTAINED TO ENSURE UNIT PERFORMANCE AND MAINTAIN WARRANTY.

Elevations show cabinet fitted with flat self-serve gantry (option) and GN pans (accessories), and include other gantry options available.

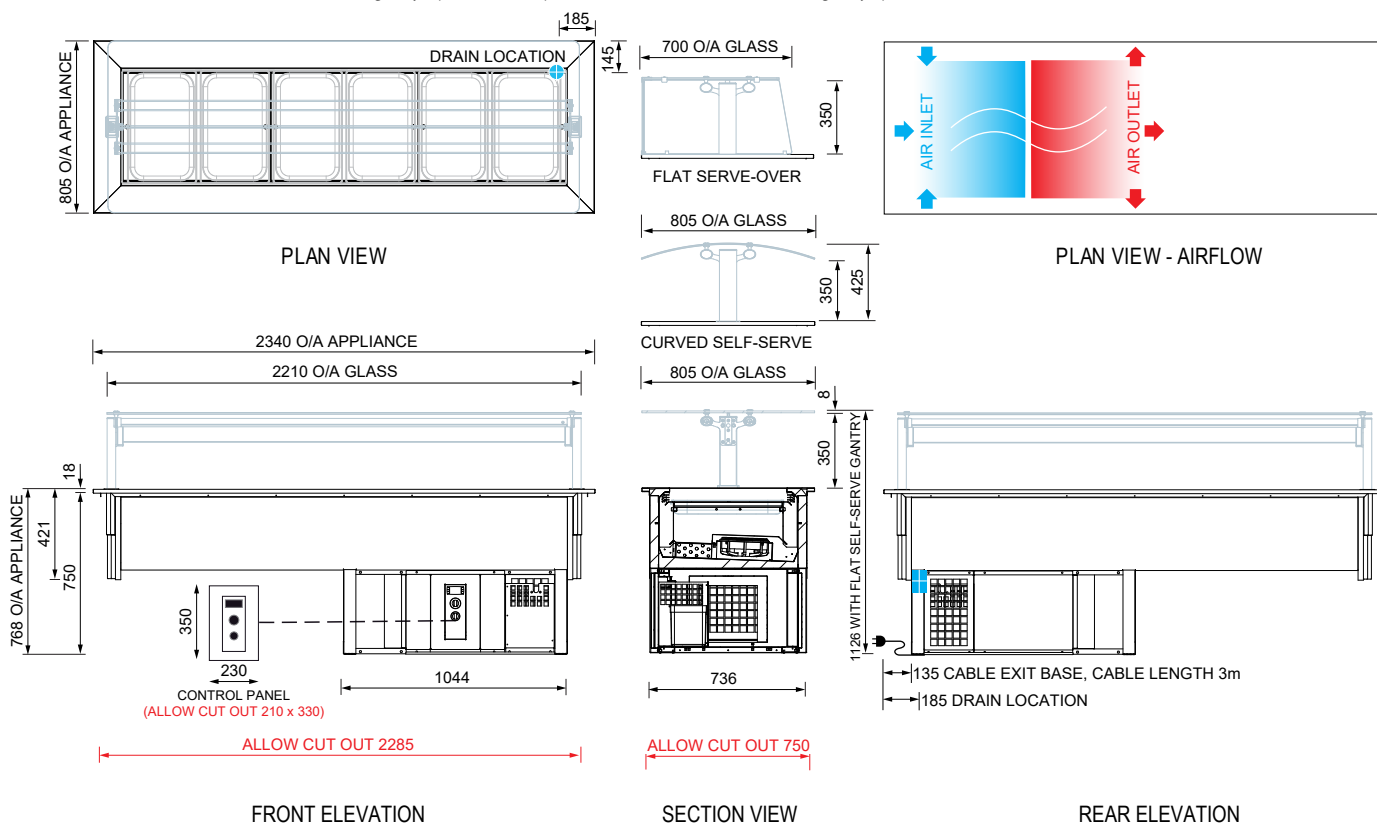

For information on technical data and installation guidelines please contact support@fpgworld.com

In line with our policy to continually develop, improve and support our products, Future Products Group Ltd reserves the right to change specifications and design without notice.

Have a question? Please email us at sales@fpgworld.com or visit www.fpgworld.com for full contact details for your region.

