



FPGWORLD.COM

INLINE

GN SERIES 4x 1/1 PANS MOBILE HEATED

RANGE	INLINE GN SERIES
TEMPERATURE	HEATED
MODEL	IN-GNH04-M
INSTALLATION	MOBILE
OPERATING-MODES	WET, STEAM, DRY
HEIGHT	942mm (without gantry)
	1300mm (with flat self-serve gantry)
WIDTH	1663mm
DEPTH	974mm

TEMPERATURE RANGE	+75°C – +110°C
RECOMMENDED CORE PRODUCT TEMPERATURE	+65°C – +80°C
ENVIRONMENTAL TEST CONDITIONS	22°C / 65% RH

FEATURES

- High energy efficiency: 3.3 kWh per hour (average)**
- Cabinet operating temperature range +75°C - +110°C**
Recommended core product temperature +65°C - +80°C

Mobile Heated Display

- Timeless stainless steel chassis fitted with heavy duty castors to support mobility
- Merchandise with GN pans (accessories)

Operational Excellence

- Engineering excellence and heavy duty build quality provide years of trouble free operation
- Double-skin insulated well for heat retention
- Energy efficient wet, steam or dry well operational modes
 - For wet and steam mode, waterfill and removal is manual
- With flip-up elements for easy safe access, cabinets can be cleaned and serviced with many parts removable
- Pre-wired for gantry heat lamps and water level indicator
- Onboard control panel: Temperature, Power, Operating Mode

Gantry (Option)

- Constructed from toughened safety glass and fitted with halogen heat lamps, with 3000 hour warm white lighting



Showing : Inline GN Series Mobile heated 4x 1/1 pans, fitted with flat self-serve gantry (option) and GN pans (accessories)

OPTIONS & ACCESSORIES

Contact a [FPG Sales Representative](#) for our full range, including:

- Gantries: Flat self-serve, curved self-serve, flat serve-over
- GN pans (various sizes)
- GN dividers
- Tray race
- Side panels with grilles



Please contact FPG to discuss your requirements for meeting country-specific standards.

FPGWORLD.COM

HEATED DATA

MODEL	TEMPERATURE RANGE	RECOMMENDED CORE PRODUCT TEMPERATURE	ENVIRONMENTAL TEST CONDITIONS	OPERATING MODES	WATER FILL
IN-GNH04-M	+75°C – +110°C	+65°C – +80°C	22°C / 65% RH	Wet/Steam/Dry	Manual

ELECTRICAL DATA

MODEL	VOLTAGE	PHASE ¹	CURRENT	E24H (kWh)	kWh per hour (average)	IP RATING	MAINS CONNECTION	HEAT LAMPS	HALOGEN LIGHTING	
									HOURS	COLOUR
IN-GNH04-M	220-240 V	Single	13.8 A	79.2	3.3	IP 22	Plug ²	N/A	N/A	N/A
GANTRY (Option)	220-240 V	Single	5.2 A	28.8	1.2	IP 22	Wired to GN	4x 300 watt linear halogen	3000	Warm white

¹Three phase power is also available (see product manual). Please specify power requirements upon order.

²Appropriate plug supplied upon specification.

CAPACITY, ACCESS & CONSTRUCTION

MODEL	DISPLAY AREA (GN PANS)	NO. OF 1/1 PANS ³	DRAIN DIAMETER	CHASSIS CONSTRUCTION
IN-GNH04-M	0.6 m ²	Accommodates 4	BSP 3/4"	Stainless 304 and mild steel


³Accessory.

DIMENSIONS WITHOUT GANTRY

MODEL	H x W x D mm (Uncrated)	MASS (Uncrated)
IN-GNH04-M	942 x 1663 x 974	270 kg

Crated weights and dimensions vary. Please contact us for information on your shipment.

Elevations show cabinet fitted with flat self-serve gantry (option) and GN pans (accessories), and include other gantry options available.

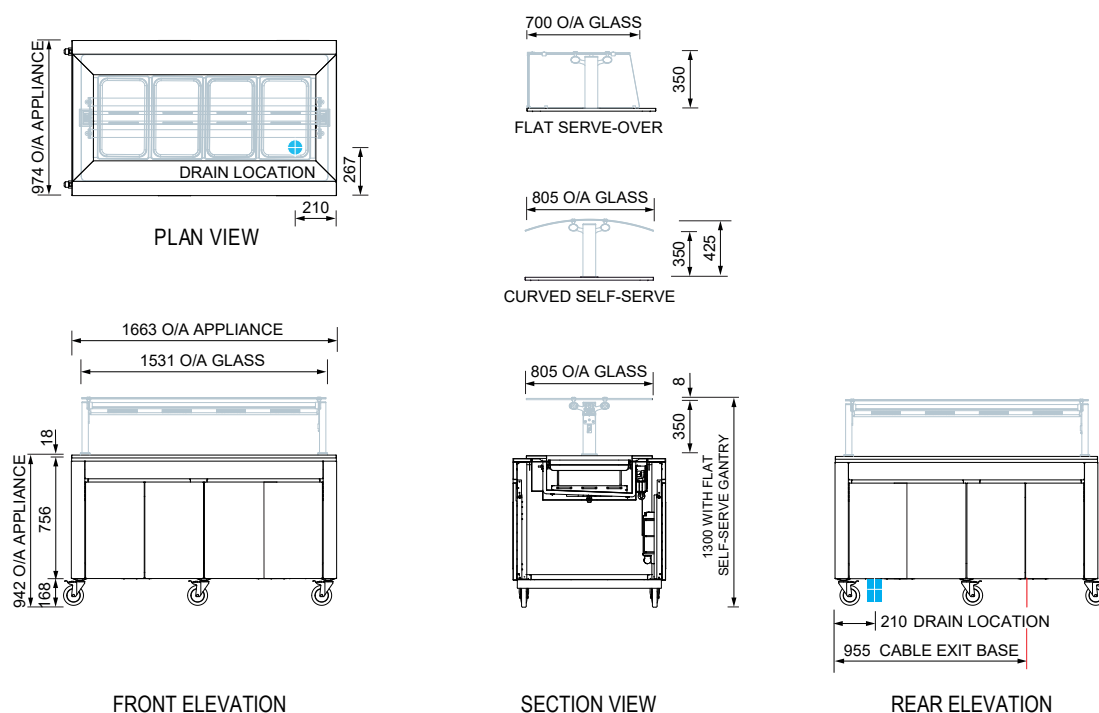

For information on technical data and installation guidelines please contact support@fpgworld.com

In line with our policy to continually develop, improve and support our products, Future Products Group Ltd reserves the right to change specifications and design without notice.

Have a question? Please email us at sales@fpgworld.com or visit www.fpgworld.com for full contact details for your region.

