


RANGE	INLINE TOWER SERIES
TEMPERATURE	REFRIGERATED
MODEL	IN-TC12
FRONT	SQUARE/FIXED FRONT
INSTALLATION	FREESTANDING
REFRIGERATION	INTEGRAL, R513A
HEIGHT	1941mm
WIDTH	1201mm
DEPTH	679mm

CORE PRODUCT TEMPERATURE	+2°C – +4°C
ENVIRONMENTAL TEST CONDITIONS	CLIMATE CLASS 3 25°C / 60% RH
CABINET CLASSIFICATION	3M1



## FEATURES

 **High energy efficiency: 0.73 kWh per hour (average)**





 **Maintains an average of +2°C - +4°C core product temperature at Climate Class 3 25°C/60%RH with up to 75 door openings per hour**

- Smart display with double-glazed glass finished with a black trim

### Fixed Front Refrigerated Display

-  Five height-adjustable wire rack shelves and base are full cabinet width to support maximum display capacity
-  50,000 hour LED lighting system at 2758 lumens per metre in cabinet top and to each shelf
- Unique shelf mounted ticket strip front and rear: 30mm

### Operational Excellence

-  Upper and lower sliding doors (staff side) and fixed front (customer side)
-  High internal humidity maintains and extends shelf life
-  Constructed from stainless and mild steel and fully double-glazed, toughened safety glass for maximum energy efficiency, climate control and durability
-  Self contained refrigeration system with EC fans for maximum energy efficiency
- Designed to be freestanding
- Fitted with unidirectional rollers and stabilisers



Showing : Inline Tower Series refrigerated 1200mm square freestanding fixed front with integral refrigeration

## OPTIONS & ACCESSORIES

Contact a [FPG Sales Representative](#) for our full range, including:

- Angled base insert
- Branded decals
- Rear door or end glass mirror application
- Auto Condensate Removal (ACR)
- Custom joinery solution



### REFRIGERATION DATA

MODEL	CORE PRODUCT TEMPERATURE	ENVIRONMENTAL TEST CONDITIONS	REFRIGERATION	REFRIGERANT	CONDENSATE REMOVAL
IN-TC12	+2°C – +4°C	Climate Class 3 - 25°C / 60% RH	Integral	R513A	Manual/ACR <sup>1</sup>

<sup>1</sup>Option.

### ELECTRICAL DATA

MODEL	VOLTAGE	PHASE	CURRENT	E24H (kW/h)	kWh per hour (average)	IP RATING	MAINS		LED LIGHTING		
							CONNECTION	CONNECTION PLUG <sup>2</sup>	HOURS	LUMENS	COLOUR
IN-TC12	220-240 V	Single	4.8 A	17.52	0.73	IP 22	3 metre, 3 core cable	10 amp, 3 pin plug	50,000	2758 per metre	Natural

<sup>2</sup>Please advise country to change plug specification.

### CAPACITY, ACCESS & CONSTRUCTION

MODEL	DISPLAY AREA	LEVELS	ACCESS FRONT	ACCESS REAR	DOOR OPENINGS @ +2°C – +4°C	CHASSIS CONSTRUCTION
IN-TC12	2.8 m <sup>2</sup>	5 Shelves + Base	Fixed front	Sliding doors	75 per hour	Stainless 304 and mild steel

### DIMENSIONS


MODEL	H x W x D mm (Uncrated)	MASS (Uncrated)
IN-TC12	1941 x 1201 x 679	280 kg

Crated weights and dimensions vary. Please contact us for information on your shipment.


#### Installation note:

Model cutout dimensions: IN-TC12 models require 1205 x 684mm benchtop cutout. Joinery height 460mm (see product manual for installation guide).


**UNOBSTRUCTED AIRFLOW MUST BE MAINTAINED TO ENSURE UNIT PERFORMANCE AND MAINTAIN WARRANTY.**




PLAN VIEW




PLAN VIEW - AIRFLOW  
FREEFLOW AIR TECHNOLOGY

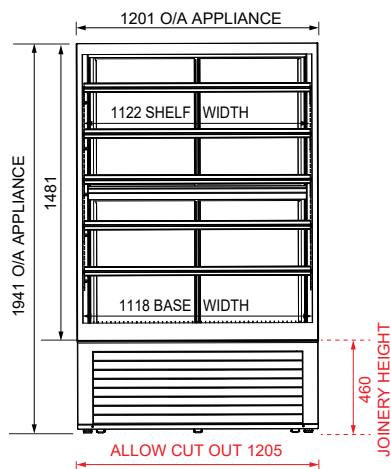

FRONT ELEVATION

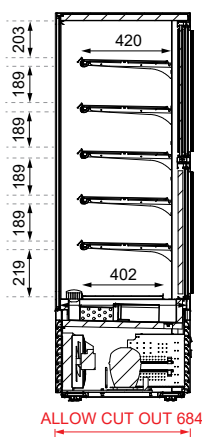

SECTION VIEW

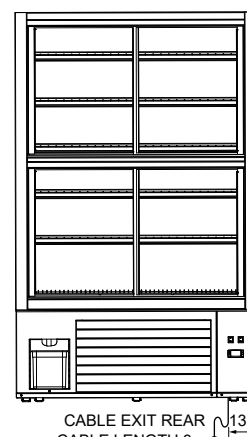

REAR ELEVATION

For information on technical data and installation guidelines please contact [support@fpgworld.com](mailto:support@fpgworld.com)

In line with our policy to continually develop, improve and support our products, Future Products Group Ltd reserves the right to change specifications and design without notice.

Have a question? Please email us at [sales@fpgworld.com](mailto:sales@fpgworld.com) or visit [www.fpgworld.com](http://www.fpgworld.com) for full contact details for your region.

Worldwide  
contact  
details:

