

RANGE	ISOFORM GRAB&GO
TEMP. TOP	HEATED/TILT FRONT
TEMP. BOTTOM	REFRIGERATED/OPEN FRONT
MODEL	I-GG-HR-24-14-A003
INSTALLATION	FREESTANDING
REFRIGERATION	INTEGRAL, R449a
HEIGHT	1454mm
WIDTH	2358mm
DEPTH BASE	915mm

TOP	TEMPERATURE RANGE	+65°C – +80°C
	ENVIRONMENTAL TEST CONDITIONS	22°C / 65% RH

BOTTOM	CORE PRODUCT TEMPERATURE	+2°C – +4°C
	ENVIRONMENTAL TEST CONDITIONS	CLIMATE CLASS 3 25°C / 60% RH
	CABINET CLASSIFICATION	3M1

ENERGY EFFICIENCY
NZ & AU
For Star Rating, please visit reg.energyrating.gov.au/comparator

FEATURES

High energy efficiency: 1.99 kWh per hour (average)

- Sleek black cabinet frame with silver pinstripe (default) on front, rear and doors and grille to front panel

Tilt Front Heated Top Display

Cabinet operating temperature range +65°C - +80°C Recommended core product temperature +65°C - +80°C




- Engineered with energy-efficient, fan assisted Thermofin heating technology to provide fast heat-up time and gentle heating for extended product shelf life
- 25,000 hour LED lighting system (colour: natural) at 2758 lumens per metre in cabinet top display
 - Tilt front glass provides easy access for cleaning
 - Base ticket strip: 30mm (height) with caution decal applied

Open Front Refrigerated Bottom Display

Maintains an average of +2°C - +4°C core product temperature at Climate Class 3 25°C / 60% RH

- 50,000 hour LED lighting system (colour: natural) at 2758 lumens per metre in cabinet bottom display and to shelf
- Fixed-height shelf and base, powdercoated black (default) are full cabinet width to support maximum display capacity
- Shelf can be flat or tilted 7°
- Unique front ticket strip holder 30mm on shelves and base, and to the rear of shelves
- Auto Condensate Removal (ACR)

Operational Excellence

- 'Plug and play' - integral refrigeration
-  Dual Action Doors (staff side) - doors both slide and swing for full-width access to the cabinet
-  Constructed from stainless and mild steel and fully double-glazed, toughened safety glass for maximum energy efficiency, climate control and durability
-  Configured with a pre-filter - with regular cleaning by operations staff the life of the cabinet can be extended
- Fitted with unidirectional rollers and adjustable stabilisers



Showing : Isoform Grab&Go 2358mm width x 1454mm height
Top Display: Heated, tilt front. Bottom Display: Refrigerated, open front with shelf

OPTIONS & ACCESSORIES

Contact a [FPG Sales Representative](#) for our full range, including:

- Remote refrigeration with TX, EPR or Solenoid valves for connection
- Flat front panel to base on cabinets with remote refrigeration
- Pinstripe colour
- Shelf trays: Toughened safety glass or brushed stainless steel. Colour and woodprint options available for steel shelf trays
- Branded decals
- Sides: mirror effect
- LED lighting colour: Warm white
- Lockable castors
- Isoform Sealing Kit

Top Display

- Additional shelf
- Drip trays: Colour and woodprint options available
- Stainless steel product trays with three sides
- Stainless steel pie chutes

Bottom Display

- Gravity feed system
- Night curtain

HEATED DATA (TOP DISPLAY)

MODEL	TEMPERATURE RANGE	RECOMMENDED CORE PRODUCT TEMPERATURE	ENVIRONMENTAL TEST CONDITIONS	HEATING
I-GG-HR-24-14-A003	+65°C - +80°C	+65°C - +80°C	22°C / 65% RH	Fan assisted Thermofin

REFRIGERATION DATA (BOTTOM DISPLAY)

MODEL	CORE PRODUCT TEMPERATURE	ENVIRONMENTAL TEST CONDITIONS	REFRIGERATION	REFRIGERANT	CONDENSATE REMOVAL
I-GG-HR-24-14-A003	+2°C - +4°C	Climate Class 3 - 25°C / 60% RH	Integral	R449a	ACR

ELECTRICAL DATA

MODEL	VOLTAGE	PHASE	CURRENT	E24H (kWh)	kWh per hour (average)	IP RATING	MAINS		LED LIGHTING		
							CONNECTION	CONNECTION PLUG	HOURS	LUMENS	COLOUR
TOP DISPLAY	220-240 V	Single	20.2 A	25.68	1.07	IP 22	Fixed wiring ¹	N/A	25,000	2758 per metre	Natural
BOTTOM DISPLAY				22.23	0.92				50,000		

¹Please see manual for more information.

CAPACITY, ACCESS & CONSTRUCTION

	SHELF DISPLAY AREA	LEVELS	ACCESS FRONT	ACCESS REAR	REAR DOORS	CHASSIS CONSTRUCTION
TOP DISPLAY	1.03 m²	Base only	Tilt front	Dual Action doors	4	Stainless 304 and mild steel
BOTTOM DISPLAY	1.90 m²	1 Shelf + Base	Open front	Dual Action doors	4	

DIMENSIONS


MODEL	H x W x D mm (Uncrated)	MASS (Uncrated)
I-GG-HR-24-14-A003	1454 x 2358 x 915	- kg

Crated weights and dimensions vary. Please contact us for information on your shipment.

Installation note:

Designed to be installed as a stand alone unit. Model cutout dimensions: I-GG-HR-12-14 models require 2368 x 920mm benchtop cutout. Joinery height 407mm (see product manual for installation guide). When installing this cabinet next to an adjacent Isoform refrigerated or controlled ambient cabinet, please install a Isoform Sealing Kit (accessory) between them.

UNOBSTRUCTED AIRFLOW MUST BE MAINTAINED TO ENSURE UNIT PERFORMANCE AND TO MAINTAIN WARRANTY.

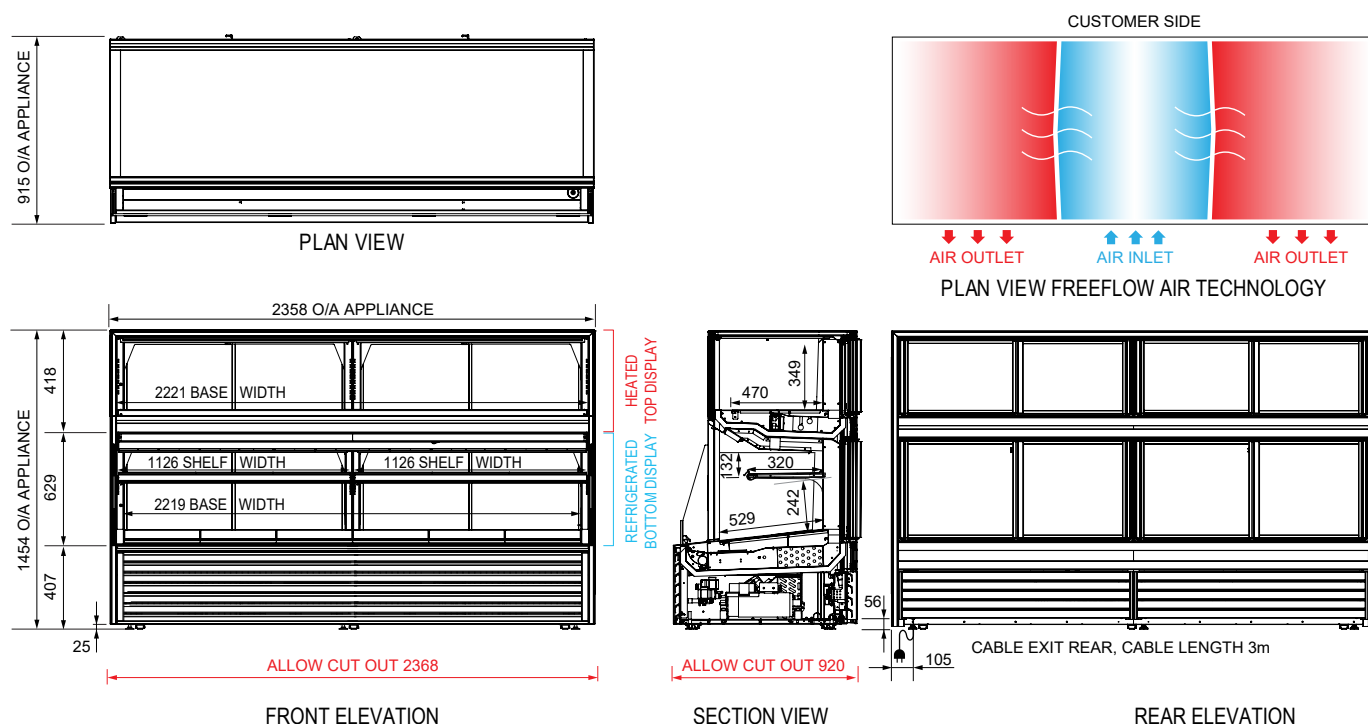

For information on technical data and installation guidelines please contact support@fpgworld.com

In line with our policy to continually develop, improve and support our products, Future Products Group Ltd reserves the right to change specifications and design without notice.

Have a question? Please email us at sales@fpgworld.com or visit www.fpgworld.com for full contact details for your region.

