



FPGWORLD.COM

ISOform

GRAB&GO 1200/1350

REFRIG/REFRIG: REMOTE R449a

RANGE	ISOFORM GRAB&GO
TEMP. TOP	REFRIGERATED/TILT FRONT
TEMP. BOTTOM	REFRIGERATED/OPEN FRONT
MODEL	I-GG-RR-12-13-R003
INSTALLATION	FREESTANDING
REFRIGERATION	REMOTE, R449a
HEIGHT	1354mm
WIDTH	1208mm
DEPTH BASE	915mm

CORE PRODUCT TEMPERATURE	+2°C – +4°C
ENVIRONMENTAL TEST CONDITIONS	CLIMATE CLASS 3 25°C / 60% RH
CABINET CLASSIFICATION	3M1

FEATURES

-  **Maintains an average of +2°C - +4°C core product temperature at Climate Class 3 25°C / 60% RH**
- Sleek black cabinet frame with silver pinstripe (default) on front, rear and doors
-  50,000 hour LED lighting system (colour: natural) at 1500 lumens per metre in both top and bottom displays

Tilt Front Refrigerated Top Display

-  High internal humidity maintains and extends shelf life
- Tilt front glass provides easy access for cleaning
- Base ticket strip: 30mm (height)

Open Front Refrigerated Bottom Display

- Fixed-height shelf and base, powdercoated black (default) are full cabinet width to support maximum display capacity
- Shelf can be flat or tilted 7°
- Unique front ticket strip holder 30mm on shelf and base, and to the rear of shelf

Operational Excellence

- Connects to remote refrigeration system
-  Dual Action Doors (staff side) - doors both slide and swing for full-width access to the cabinet
-  Constructed from stainless and mild steel with fully double-glazed, toughened safety glass for maximum energy efficiency, climate control and durability
- Fitted with unidirectional rollers and adjustable stabilisers



Please contact FPG to discuss your requirements for meeting country-specific standards.



Showing : Isoform Grab&Go 1208mm width x 1354mm height
Top Display: Refrigerated, tilt front. Bottom Display: Refrigerated, open front with shelf

OPTIONS & ACCESSORIES

Contact a [FPG Sales Representative](#) for our full range, including:

- Further refrigerants supported
- Pinstripe colour
- Shelf trays: Toughened safety glass or brushed stainless steel. Colour and woodprint options available for steel shelf trays
- Branded decals
- Sides: mirror effect
- LED lighting colour: Warm white
- Lockable castors
- Isoform Sealing Kit
- Top Display**
 - Additional shelf
- Bottom Display**
 - Gravity feed system
 - Night curtain

FPGWORLD.COM

GRAB&GO 1200/1350
REFRIG/REFRIG: REMOTE R449a

REFRIGERATION DATA

MODEL	CORE PRODUCT TEMPERATURE	ENVIRONMENTAL TEST CONDITIONS	REFRIGERATION	REFRIGERANT	CONDENSATE REMOVAL
I-GG-RR-12-13-R003	+2°C - +4°C	Climate Class 3 - 25°C / 60% RH	Remote	R449a	Plumb to waste

Valve options include: TX, EPR and Solenoid. Refrigeration duty: 1,930W @ -5°C SST & 35°C condensing. Remote condensing unit not supplied.

ELECTRICAL DATA

MODEL	VOLTAGE	PHASE	CURRENT	E24H (kWh)	kWh per hour (average)	IP RATING	MAINS		LED LIGHTING		
							CONNECTION	CONNECTION PLUG ¹	HOURS	LUMENS	COLOUR
I-GG-RR-12-13-R003	220-240 V	Single	TBA	TBA	TBA	IP 22	3 metre 3 core cable	10 amp 3 pin plug	50,000	1500 per metre	Natural

¹Please advise country to change plug specification.

CAPACITY, ACCESS & CONSTRUCTION

	SHELF DISPLAY AREA	LEVELS	ACCESS FRONT	ACCESS REAR	REAR DOORS	CHASSIS CONSTRUCTION
TOP DISPLAY	0.50 m²	Base only	Tilt front	Dual Action doors	2	Stainless 304 and mild steel
BOTTOM DISPLAY	0.95 m²	1 Shelf + Base	Open front	Dual Action doors	2	





DIMENSIONS

MODEL	H x W x D mm (Uncrated)	MASS (Uncrated)
I-GG-RR-12-13-R003	1354 x 1208 x 915	- kg

Crated weights and dimensions vary. Please contact us for information on your shipment.

Installation note:

Designed to be installed as a stand alone unit. Model cutout dimensions: I-GG-RR-12-13 models require 1218 x 920mm benchtop cutout. Joinery height 307mm (see product manual for installation guide). When installing this cabinet next to an adjacent Isoform refrigerated or controlled ambient cabinet, please install an Isoform Sealing Kit (accessory) between them.

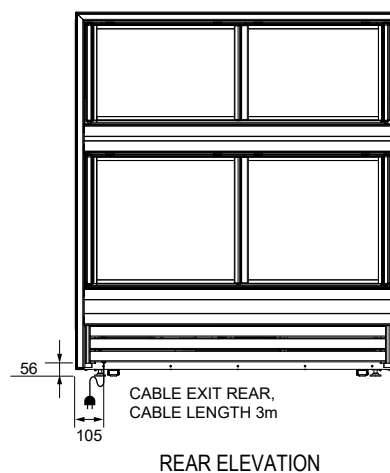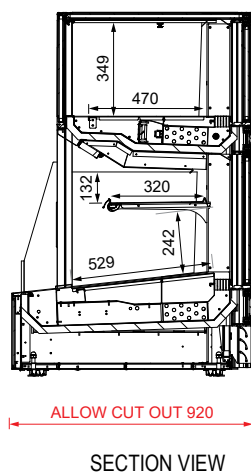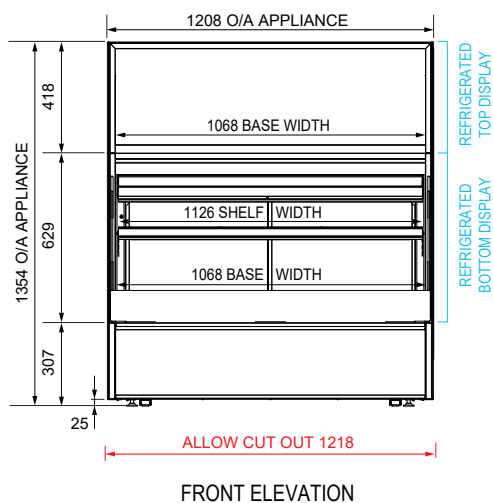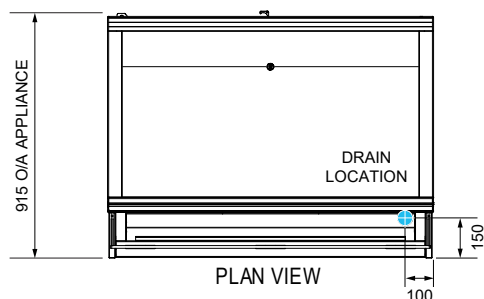

For information on technical data and installation guidelines please contact support@fpgworld.com

In line with our policy to continually develop, improve and support our products, Future Products Group Ltd reserves the right to change specifications and design without notice.

Have a question? Please email us at sales@fpgworld.com or visit www.fpgworld.com for full contact details for your region.

Worldwide
contact
details:

