



FPGWORLD.COM

7-ELEVEN

IMPULSE SLIM 13H 09W
OPEN FRONT/3 SHELVES
REFRIGERATED: R290 **VSD**

| | |
|---------------|----------------------------|
| RANGE | 7-ELEVEN IMPULSE |
| TEMPERATURE | REFRIGERATED |
| MODEL | IL-7EL-VI09-R-13-05-B100 |
| FRONT | OPEN FRONT |
| INSTALLATION | FREESTANDING/ROLLERS |
| REFRIGERATION | INTEGRAL, R290 |
| TECHNOLOGY | VARIABLE SPEED DRIVE (VSD) |
| HEIGHT | 1350mm |
| WIDTH | 900mm |
| DEPTH | 466mm |

| | |
|-------------------------------|----------------------------------|
| CORE PRODUCT TEMPERATURE | +0.5°C – +2°C |
| ENVIRONMENTAL TEST CONDITIONS | CLIMATE CLASS 3 25°C / 60% RH |
| CABINET CLASSIFICATION | 3MO |

| ENERGY EFFICIENCY |
|---|
| NZ & AU For Star Rating, please visit reg.energyrating.gov.au/comparator |

FEATURES

Very high energy efficiency: 0.57 kWh per hour (average)

Maintains an average of +0.5°C - +2°C core product temperature at Climate Class 3: 25°C/60%RH

- Robust open front display, powdercoated Bright Silver for a sleek finish

Open Front Refrigerated Display

- Four full-width display levels: three adjustable shelves and base are powdercoated Bright Silver and full cabinet width to support maximum display capacity
- Pluggable 50,000 hour LED lighting system at 800 lumens per metre in cabinet top and to each shelf
- Shelf and base ticket strip: 30mm

Operational Excellence

- Constructed from stainless and mild steel - powdercoated Bright Silver with fully double-glazed, toughened safety glass for maximum energy efficiency, climate control and durability
- Fitted with high capacity EC (electronically controlled) energy saving and low noise fans
- Variable speed drive inverter compressor and electronic controller ensure the cabinet is operating as efficiently as possible
- Cabinet features an 'air curtain' to retain cold air within cabinet
- Configured with a pre-filter - with regular cleaning by operations staff the life of the cabinet can be extended
- Auto Condensate Removal (ACR)
- Fitted with unidirectional rollers



Showing : 7-Eleven Impulse Slim 13H 09W refrigerated Bright Silver freestanding open front with three shelves and base



Please contact FPG to discuss your requirements for meeting country-specific standards.

FPGWORLD.COM

REFRIGERATION DATA

| MODEL | CORE PRODUCT TEMPERATURE | ENVIRONMENTAL TEST CONDITIONS | REFRIGERATION | REFRIGERANT | A LIMIT | CONDENSATE REMOVAL |
|--------------------------|--------------------------|---------------------------------|----------------|-------------|---------------------|--------------------|
| IL-7EL-VI09-R-13-05-B100 | +0.5°C - +2°C | Climate Class 3 - 25°C / 60% RH | Integral - VSD | R290 | 9.09 m ² | ACR |

ELECTRICAL DATA

| MODEL | VOLTAGE | PHASE | CURRENT | E24H (kWh) | kWh per hour (average) | IP RATING | MAINS | | LED LIGHTING | | |
|--------------------------|-----------|--------|---------|------------|------------------------|-----------|----------------------|-------------------|--------------|---------------|---------|
| | | | | | | | CONNECTION | CONNECTION PLUG | HOURS | LUMENS | COLOUR |
| IL-7EL-VI09-R-13-05-B100 | 220-240 V | Single | 5.3 A | 13.58 | 0.57 | IP X0 | 3 metre 3 core cable | 10 amp 3 pin plug | 50,000 | 800 per metre | Natural |

CAPACITY, ACCESS & CONSTRUCTION

| MODEL | DISPLAY AREA | LEVELS | ACCESS FRONT | ACCESS REAR | CHASSIS CONSTRUCTION |
|--------------------------|---------------------|------------------|--------------|-------------|---|
| IL-7EL-VI09-R-13-05-B100 | 0.78 m ² | 3 Shelves + Base | Open front | N/A | Mild steel and double-glazed safety glass |


DIMENSIONS

| MODEL | H x W x D mm (Uncrated) | MASS (Uncrated) |
|--------------------------|-------------------------|-----------------|
| IL-7EL-VI09-R-13-05-B100 | 1350 x 900 x 466 | - |


Crated weights and dimensions vary. Please contact us for information on your shipment.

Installation note: Designed to be installed as a stand alone unit or in an island matrix.

UNOBSTRUCTED AIRFLOW MUST BE MAINTAINED TO ENSURE UNIT PERFORMANCE AND TO MAINTAIN WARRANTY. WHEN PLACED AGAINST A WALL OR IN AN ISLAND MATRIX AIRFLOW/VENTING IS RE-DIRECTED TO TOP OF CABINET. ALLOW NO LESS THAN 200mm CLEARANCE ABOVE CABINET FOR AIRFLOW.

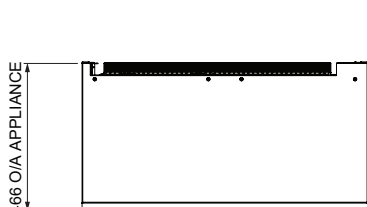


PLAN VIEW

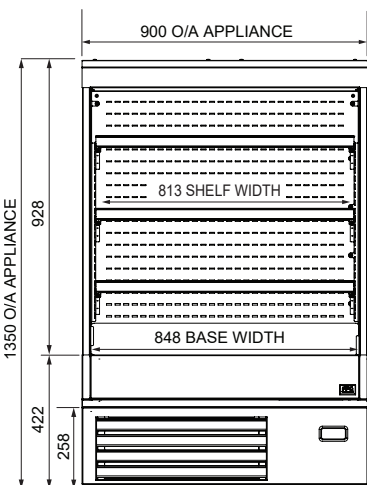


FRONT ELEVATION


WHEN PLACED AGAINST A WALL OR IN AN ISLAND MATRIX AIRFLOW VENTING IS RE-DIRECTED TO TOP OF CABINET. ALLOW AIRFLOW CLEARANCE OF 200mm.

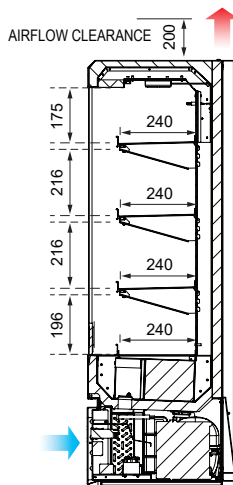

SECTION VIEW

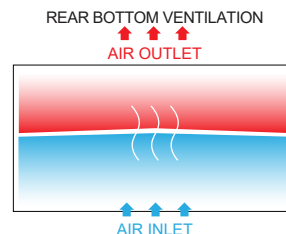

PLAN VIEW - AIRFLOW

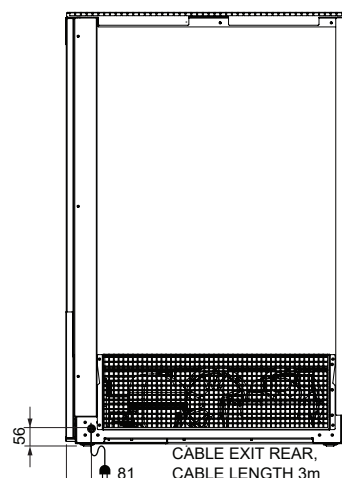

REAR ELEVATION

More information including technical data and installation guidelines is available from Future Products Group.

In line with our policy to continually develop, improve and support our products, Future Products Group Ltd reserves the right to change specifications and design without notice.

Have a question? Please email us at sales@fpgworld.com or visit www.fpgworld.com for full contact details for your region.

