





| | | |
|---------------|-----------------------|--------------------------|
| RANGE | INLINE 5000 SERIES | |
| TEMPERATURE | CONTROLLED AMBIENT | |
| MODEL | IN-5CA18-CU-TF-FS | IN-5CA18-CU-SD-FS |
| FRONT | CURVED/ TILT FRONT | CURVED/ SLIDING DOORS |
| INSTALLATION | FREESTANDING | |
| REFRIGERATION | INTEGRAL, R513A | |
| HEIGHT | 1443mm | |
| WIDTH | 1807mm | |
| DEPTH | 789mm | |

| | |
|-------------------------------|----------------------------------|
| CORE PRODUCT TEMPERATURE | +16°C – +18°C |
| ENVIRONMENTAL TEST CONDITIONS | CLIMATE CLASS 3 25°C / 60% RH |




FEATURES

-  **High energy efficiency: 1.04 kWh per hour (average)**
-  **Maintains an average of +16°C - +18°C core product temperature at Climate Class 3 25°C/60%RH with up to 120 door openings per hour**
 - Smart display with double-glazed glass encased in brushed stainless steel frame

Tilt Front or Sliding Doors Controlled Ambient Display

-  Three tiltable, height-adjustable stainless steel shelves and base are full cabinet width to support maximum display capacity
-  50,000 hour LED lighting system at 1500 lumens per metre in cabinet top and to each shelf
 - Unique front ticket strip holder 30mm on shelves and base, and to the rear of shelves

Operational Excellence

-  Sliding doors (staff side) and tilt front or sliding doors options (customer side)
-  High internal humidity maintains and extends shelf life
-  Constructed from stainless and mild steel with fully double-glazed, toughened safety glass for maximum energy efficiency, climate control and durability
 - Auto Condensate Removal (ACR)
 - FPG Freeflow air ventilation at rear eliminates the need for front ventilation panels
 - Designed to be installed into joinery
 - Fitted with adjustable 150mm legs (+30mm adjustment)



Showing : Inline 5000 Series controlled ambient 1800mm curved freestanding tilt front with integral refrigeration

OPTIONS & ACCESSORIES

Contact a [FPG Sales Representative](#) for our full range, including:

- Remote refrigeration with TX, EPR or Solenoid valves for connection
- Shelf trays: Toughened safety glass or mild steel. Colour and woodprint options available for steel shelf trays
- Angled base insert
- Branded decals
- Sides: mirror effect
- Adjustable 100mm legs (+25mm adjustment), lockable castors or unidirectional rollers
- External stainless steel chassis surround
- Rear deck assemblies
- Thermal divider panels
- Custom joinery solution



REFRIGERATION DATA

| MODEL | CORE PRODUCT TEMPERATURE | ENVIRONMENTAL TEST CONDITIONS | REFRIGERATION | REFRIGERANT | CONDENSATE REMOVAL |
|-------------------|--------------------------|---------------------------------|---------------|-------------|--------------------|
| IN-5CA18-CU-XX-FS | +16°C – +18°C | Climate Class 3 - 25°C / 60% RH | Integral | R513A | ACR |

ELECTRICAL DATA

| MODEL | VOLTAGE | PHASE | CURRENT | E24H (kWh) | kWh per hour (average) | IP RATING | MAINS | | LED LIGHTING | | |
|-------------------|-----------|--------|---------|------------|------------------------|-----------|-----------------------|------------------------------|--------------|----------------|---------|
| | | | | | | | CONNECTION | CONNECTION PLUG ¹ | HOURS | LUMENS | COLOUR |
| IN-5CA18-CU-XX-FS | 220-240 V | Single | 6.2 A | 24.96 | 1.04 | IP 22 | 3 metre, 3 core cable | 10 amp, 3 pin plug | 50,000 | 1500 per metre | Natural |

¹Please advise country to change plug specification.

CAPACITY, ACCESS & CONSTRUCTION

| MODEL | SHELF DISPLAY AREA | LEVELS | ACCESS FRONT | ACCESS REAR | DOOR OPENINGS @ +16°C – +18°C | CHASSIS CONSTRUCTION |
|-------------------|--------------------|------------------|---------------|---------------|-------------------------------|------------------------------|
| IN-5CA18-CU-TF-FS | 2.6 m² | 3 Shelves + Base | Tilt front | Sliding doors | 120 per hour | Stainless 304 and mild steel |
| IN-5CA18-CU-SD-FS | 2.6 m² | 3 Shelves + Base | Sliding doors | Sliding doors | 120 per hour | Stainless 304 and mild steel |

DIMENSIONS

| MODEL | H x W x D mm (Uncrated) | MASS (Uncrated) |
|-------------------|-------------------------|-----------------|
| IN-5CA18-CU-XX-FS | 1443 x 1807 x 789 | 275 kg |

Crated weights and dimensions vary. Please contact us for information on your shipment.


Installation note:

Model cutout dimensions: IN-5CA18-CU-XX-FS models require 1760 x 725mm benchtop cutout. Joinery height 603mm (see product manual for installation guide). When installing this cabinet next to an adjacent Inline 5000 Series refrigerated cabinet, please install an Inline 5000 Series thermal divider panel (accessory) between them.


UNOBSTRUCTED AIRFLOW MUST BE MAINTAINED TO ENSURE UNIT PERFORMANCE AND MAINTAIN WARRANTY.




PLAN VIEW

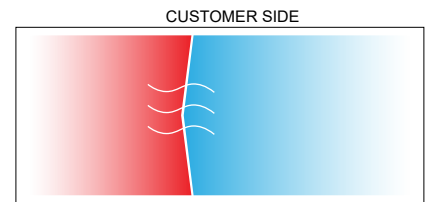


PLAN VIEW
FREEFLOW AIR TECHNOLOGY

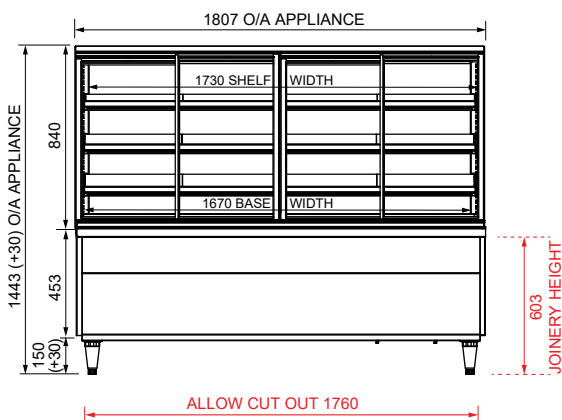

FRONT ELEVATION

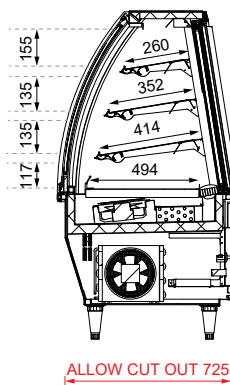

SECTION VIEW

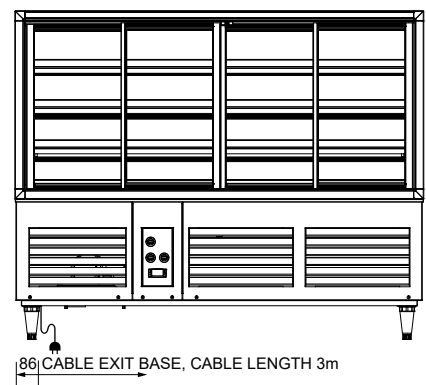

REAR ELEVATION

For information on technical data and installation guidelines please contact support@fpgworld.com

In line with our policy to continually develop, improve and support our products, Future Products Group Ltd reserves the right to change specifications and design without notice.

Have a question? Please email us at sales@fpgworld.com or visit www.fpgworld.com for full contact details for your region.

