



RANGE	INLINE 5000 SERIES
TEMPERATURE	HEATED
MODEL	IN-5H08-SQ-OF-FS
FRONT	SQUARE/OPEN FRONT
INSTALLATION	FREESTANDING
HEIGHT	1443mm
WIDTH	807mm
DEPTH	770mm




TEMPERATURE RANGE	+65°C – +85°C
RECOMMENDED CORE PRODUCT TEMPERATURE	+65°C – +80°C
ENVIRONMENTAL TEST CONDITIONS	22°C / 65% RH

## FEATURES







-  **High energy efficiency: 1.4 kWh per hour (average)**
-  **Cabinet operating temperature range +65°C – +85°C**  
**Recommended core product temperature +65°C – +80°C**

- Smart open front display with double-glazed glass encased in brushed stainless steel frame

### Open Front Heated Display

-  Four full-width display levels: three fixed **IWave** quartz infrared shelves and heated base
-  Each **IWave** shelf is brushed stainless steel and is fitted with ticket strips front and rear: 30mm (height), with caution decal applied. Each shelf is supplied with 1x 730mm width removable aluminium drip tray
-  25,000 hour LED lighting system at 2758 lumens per metre in cabinet top and to each shelf
- Base ticket strip: 30mm (height) with caution decal applied

### Operational Excellence

-  Sliding doors (staff side) and open front (customer side)
-  FPG **IWave** heating technology uses low-wattage quartz infrared elements complemented with a heating coil in the base for even temperature distribution and extended shelf life
-  Fitted with an electronic controller for energy efficiency
-  Safer for consumers - display surfaces are maintained < +65°C and the internal air temperature is lower than in many fan-assisted cabinets
-  No noise pollution – this cabinet runs silently
-  Constructed from stainless and mild steel with fully double-glazed, toughened safety glass for maximum energy efficiency, climate control and durability
- Designed to be installed into joinery
- Fitted with adjustable 150mm legs (+30mm adjustment)



IWave

Showing : Inline 5000 Series heated 800mm square freestanding open front

## OPTIONS & ACCESSORIES

Contact a [FPG Sales Representative](#) for our full range, including:

- Drip trays: Colour and woodprint options available
- Stainless steel product trays with three sides
- Stainless steel pie chutes
- Branded decals
- Sides: mirror effect
- Adjustable 100mm legs (+25mm adjustment), lockable castors or unidirectional rollers
- External stainless steel chassis surround
- Rear deck assemblies
- Custom joinery solution



### HEATED DATA

MODEL	TEMPERATURE RANGE	RECOMMENDED CORE PRODUCT TEMPERATURE	ENVIRONMENTAL TEST CONDITIONS	IWAVE HEATING
IN-5H08-SQ-OF-FS	+65°C – +85°C	+65°C – +80°C	22°C / 65% RH	Low-wattage infrared quartz elements

### ELECTRICAL DATA

MODEL	VOLTAGE	PHASE	CURRENT	E24H (kWh)	kWh per hour (average)	IP RATING	MAINS		LED LIGHTING		
							CONNECTION	CONNECTION PLUG <sup>1</sup>	HOURS	LUMENS	COLOUR
IN-5H08-SQ-OF-FS	220-240 V	Single	8.7 A	33.6	14	IP 22	3 metre, 3 core cable	10 amp, 3 pin plug	25,000	2758 per metre	Natural

<sup>1</sup>Please advise country to change plug specification.

### CAPACITY, ACCESS & CONSTRUCTION

MODEL	SHELF DISPLAY AREA	LEVELS	ACCESS FRONT	ACCESS REAR	CHASSIS CONSTRUCTION
IN-5H08-SQ-OF-FS	11 m <sup>2</sup>	3 Shelves + Base	Open front	Sliding doors	Stainless 304 and mild steel


### DIMENSIONS

MODEL	H x W x D mm (Uncrated)	MASS (Uncrated)
IN-5H08-SQ-OF-FS	1443 x 807 x 770	136 kg

Crated weights and dimensions vary. Please contact us for information on your shipment.

#### Installation note:

Model cutout dimensions: IN-5H08-SQ-OF-FS models require 760 x 725mm benchtop cutout. Joinery height 603mm (see product manual for installation guide).

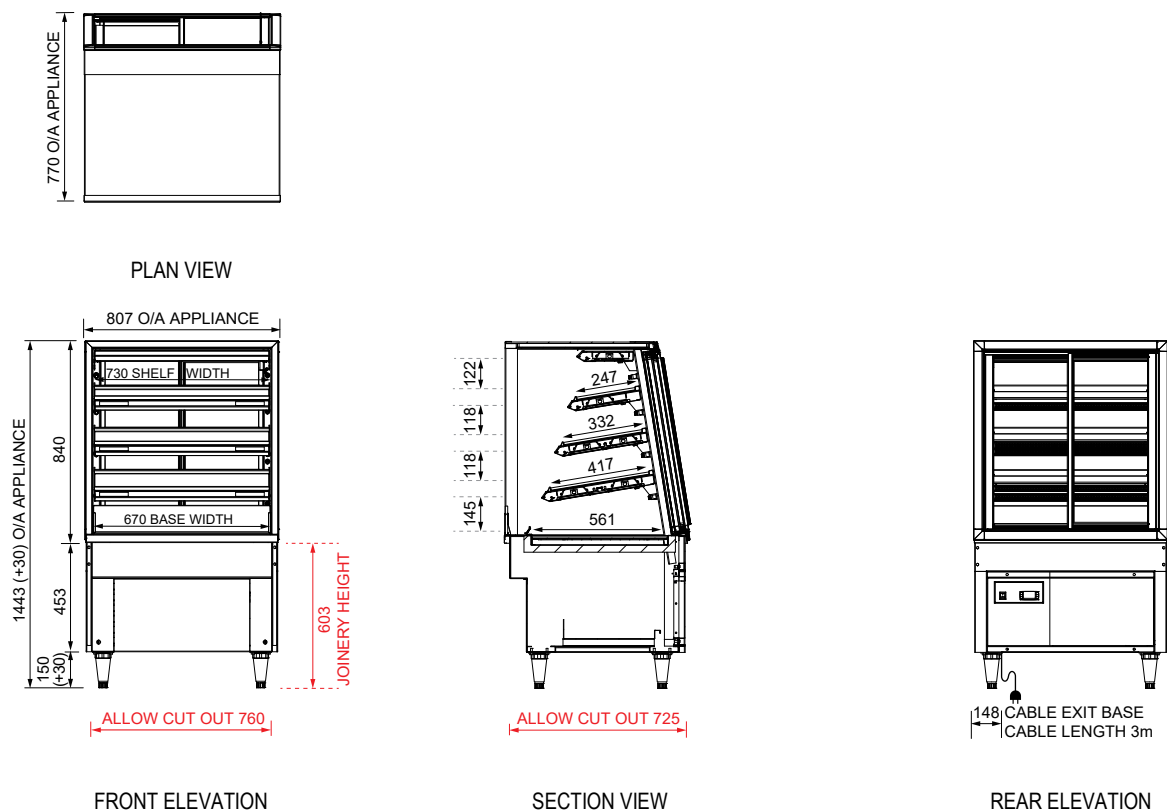

For information on technical data and installation guidelines please contact [support@fpgworld.com](mailto:support@fpgworld.com)

In line with our policy to continually develop, improve and support our products, Future Products Group Ltd reserves the right to change specifications and design without notice.

Have a question? Please email us at [sales@fpgworld.com](mailto:sales@fpgworld.com) or visit [www.fpgworld.com](http://www.fpgworld.com) for full contact details for your region.

