



FPGWORLD.COM

# INLINE

## 5000 SERIES 1200 FREESTANDING/CURVED HEATED

|              |                       |                          |
|--------------|-----------------------|--------------------------|
| RANGE        | INLINE 5000 SERIES    |                          |
| TEMPERATURE  | HEATED                |                          |
| MODEL        | IN-5H12-CU-TF-FS      | IN-5H12-CU-SD-FS         |
| FRONT        | CURVED/<br>TILT FRONT | CURVED/<br>SLIDING DOORS |
| INSTALLATION | FREESTANDING          |                          |
| HEIGHT       | 1443mm                |                          |
| WIDTH        | 1207mm                |                          |
| DEPTH        | 789mm                 |                          |

|   |               |
|---|---------------|
| TEMPERATURE RANGE                       | +55°C - +95°C |
| RECOMMENDED CORE<br>PRODUCT TEMPERATURE | +65°C - +80°C |
| ENVIRONMENTAL TEST CONDITIONS           | 22°C / 65% RH |

### FEATURES

- High energy efficiency: 2.08 kWh per hour (average)**
- Cabinet operating temperature range +55°C - +95°C  
Recommended core product temperature +65°C - +80°C**
  - Smart display with double-glazed glass encased in brushed stainless steel frame

#### Tilt Front or Sliding Doors Heated Display

- Three tiltable, height-adjustable stainless steel wire rack shelves are full cabinet width to support maximum display capacity
- 25,000 hour LED lighting system at 2758 lumens per metre in cabinet top and to each shelf
  - Unique front ticket strip holder 30mm on shelves and base, and to the rear of shelves

#### Operational Excellence

- Sliding doors (staff side) and tilt front or sliding doors options (customer side)
- Constructed from stainless and mild steel with fully double-glazed, toughened safety glass for maximum energy efficiency and durability
- Low wattage density element provides even temperature distribution
  - Designed to be installed into joinery
  - Fitted with adjustable 150mm legs (+30mm adjustment)



Showing : Inline 5000 Series heated 1200mm curved freestanding tilt front

### OPTIONS & ACCESSORIES

Contact a [FPG Sales Representative](#) for our full range, including:

- Shelf trays: Toughened safety glass or mild steel. Colour and woodprint options available for steel shelf trays
- Stainless steel product trays with three sides
- Stainless steel pie chutes
- Additional shelf
- Branded decals
- Sides: mirror effect
- Adjustable 100mm legs (+25mm adjustment), lockable castors or unidirectional rollers
- External stainless steel chassis surround
- Rear deck assemblies
- Custom joinery solution



Please contact FPG to discuss your requirements for meeting country-specific standards.

FPGWORLD.COM

### HEATED DATA

| MODEL            | TEMPERATURE RANGE | RECOMMENDED CORE PRODUCT TEMPERATURE | ENVIRONMENTAL TEST CONDITIONS | HEATING                     |
|------------------|-------------------|--------------------------------------|-------------------------------|-----------------------------|
| IN-5H12-CU-XX-FS | +55°C – +95°C     | +65°C – +80°C                        | 22°C / 65% RH                 | Low wattage density element |

### ELECTRICAL DATA

| MODEL            | VOLTAGE   | PHASE  | CURRENT | E24H (kWh) | kWh per hour (average) | IP RATING | MAINS                     |                 | LED LIGHTING |                |         |
|------------------|-----------|--------|---------|------------|------------------------|-----------|---------------------------|-----------------|--------------|----------------|---------|
|                  |           |        |         |            |                        |           | CONNECTION                | CONNECTION PLUG | HOURS        | LUMENS         | COLOUR  |
| IN-5H12-CU-XX-FS | 220-240 V | Single | 13.6 A  | 49.92      | 2.08                   | IP 22     | Fixed wiring <sup>1</sup> | N/A             | 25,000       | 2758 per metre | Natural |

<sup>1</sup>Please see the manual for more information.

### CAPACITY, ACCESS & CONSTRUCTION

| MODEL            | SHELF DISPLAY AREA | LEVELS    | ACCESS FRONT  | ACCESS REAR   | CHASSIS CONSTRUCTION         |
|------------------|--------------------|-----------|---------------|---------------|------------------------------|
| IN-5H12-CU-TF-FS | 14 m <sup>2</sup>  | 3 Shelves | Tilt front    | Sliding doors | Stainless 304 and mild steel |
| IN-5H12-CU-SD-FS | 14 m <sup>2</sup>  | 3 Shelves | Sliding doors | Sliding doors | Stainless 304 and mild steel |


### DIMENSIONS

| MODEL            | H x W x D mm (Uncrated) | MASS (Uncrated) |
|------------------|-------------------------|-----------------|
| IN-5H12-CU-XX-FS | 1443 x 1207 x 789       | 154 kg          |

Crated weights and dimensions vary. Please contact us for information on your shipment.

#### Installation note:

Model cutout dimensions: IN-5H12-CU-XX-FS models require 1160 x 725mm benchtop cutout. Joinery height 603mm (see product manual for installation guide).

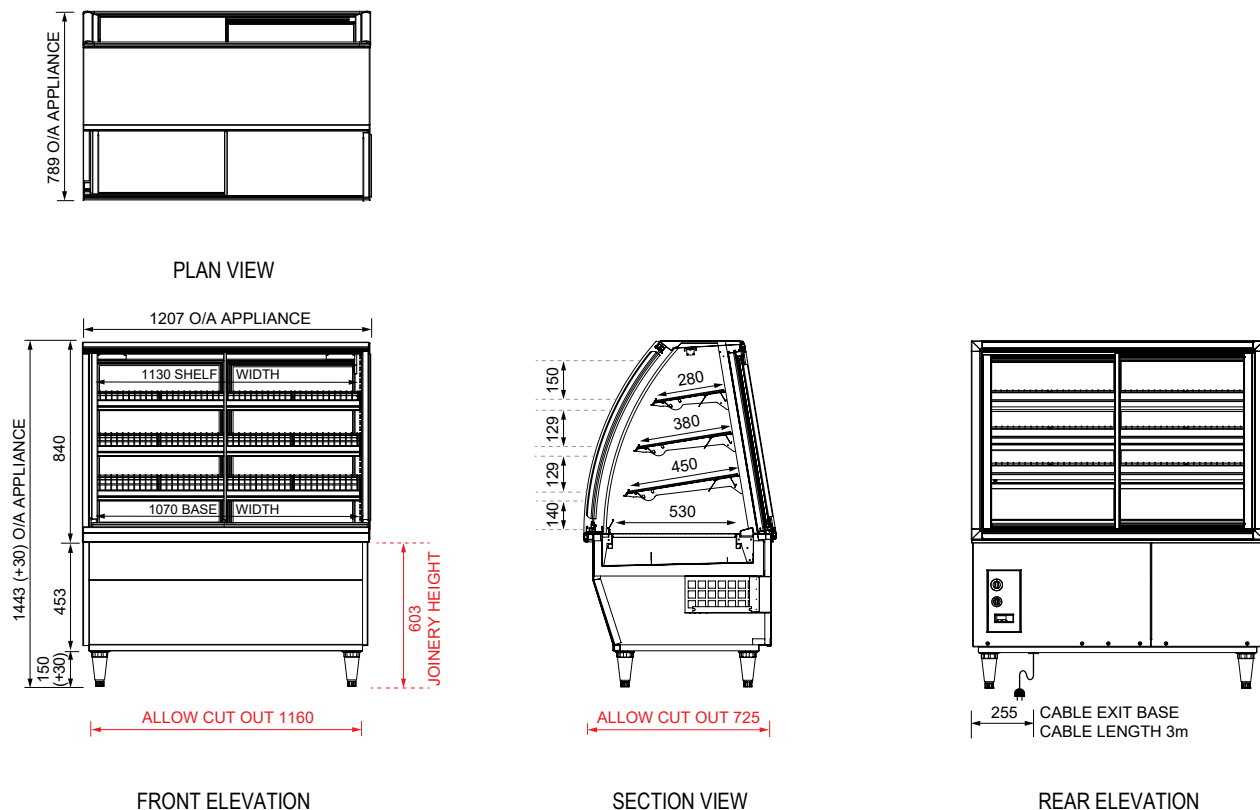

For information on technical data and installation guidelines please contact [support@fpgworld.com](mailto:support@fpgworld.com)

In line with our policy to continually develop, improve and support our products, Future Products Group Ltd reserves the right to change specifications and design without notice.

Have a question? Please email us at [sales@fpgworld.com](mailto:sales@fpgworld.com) or visit [www.fpgworld.com](http://www.fpgworld.com) for full contact details for your region.

