



FPGWORLD.COM

INLINE

5000 SERIES 1200 SQUARE/OPEN FRONT HEATED

RANGE	INLINE 5000 SERIES
TEMPERATURE	HEATED
MODEL	IN-5H12-SQ-OF-FS
FRONT	SQUARE/OPEN FRONT
INSTALLATION	FREESTANDING
HEIGHT	1443mm
WIDTH	1207mm
DEPTH	770mm

TEMPERATURE RANGE	+65°C – +85°C
RECOMMENDED CORE PRODUCT TEMPERATURE	+65°C – +80°C
ENVIRONMENTAL TEST CONDITIONS	22°C / 65% RH

FEATURES

- High energy efficiency: 1.86 kWh per hour (average)**
- Cabinet operating temperature range +65°C – +85°C**
Recommended core product temperature +65°C – +80°C

- Smart open front display with double-glazed glass encased in brushed stainless steel frame

Open Front Heated Display

- Four full-width display levels: three fixed **IWave** quartz infrared shelves and heated base
- Each **IWave** shelf is brushed stainless steel and is fitted with ticket strips front and rear: 30mm (height), with caution decal applied. Each shelf is supplied with 2x 565mm width removable aluminium drip trays
- 25,000 hour LED lighting system at 2758 lumens per metre in cabinet top and to each shelf
- Base ticket strip: 30mm (height) with caution decal applied

Operational Excellence

- Sliding doors (staff side) and open front (customer side)
- FPG **IWave** heating technology uses low-wattage quartz infrared elements complemented with a heating coil in the base for even temperature distribution and extended shelf life
- Fitted with an electronic controller for energy efficiency
- Safer for consumers - display surfaces are maintained < +65°C and the internal air temperature is lower than in many fan-assisted cabinets
- No noise pollution – this cabinet runs silently
- Constructed from stainless and mild steel with fully double-glazed, toughened safety glass for maximum energy efficiency, climate control and durability
- Designed to be installed into joinery
- Fitted with adjustable 150mm legs (+30mm adjustment)



IWave

Showing : Inline 5000 Series heated 1200mm square freestanding open front

OPTIONS & ACCESSORIES

Contact a [FPG Sales Representative](#) for our full range, including:

- Drip trays: Colour and woodprint options available
- Stainless steel product trays with three sides
- Stainless steel pie chutes
- Branded decals
- Sides: mirror effect
- Adjustable 100mm legs (+25mm adjustment), lockable castors or unidirectional rollers
- External stainless steel chassis surround
- Rear deck assemblies
- Custom joinery solution



Please contact FPG to discuss your requirements for meeting country-specific standards.

FPGWORLD.COM

HEATED DATA

MODEL	TEMPERATURE RANGE	RECOMMENDED CORE PRODUCT TEMPERATURE	ENVIRONMENTAL TEST CONDITIONS	IWAVE HEATING
IN-5H12-SQ-OF-FS	+65°C – +85°C	+65°C – +80°C	22°C / 65% RH	Low-wattage infrared quartz elements

ELECTRICAL DATA

MODEL	VOLTAGE	PHASE	CURRENT	E24H (kWh)	kWh per hour (average)	IP RATING	MAINS		LED LIGHTING		
							CONNECTION	CONNECTION PLUG ¹	HOURS	LUMENS	COLOUR
IN-5H12-SQ-OF-FS	220-240 V	Single	12.0 A	44.64	186	IP 22	3 metre, 3 core cable	15 amp, 3 pin plug	25,000	2758 per metre	Natural

¹Please advise country to change plug specification.

CAPACITY, ACCESS & CONSTRUCTION

MODEL	SHELF DISPLAY AREA	LEVELS	ACCESS FRONT	ACCESS REAR	CHASSIS CONSTRUCTION
IN-5H12-SQ-OF-FS	1.7 m ²	3 Shelves + Base	Open front	Sliding doors	Stainless 304 and mild steel


DIMENSIONS

MODEL	H x W x D mm (Uncrated)	MASS (Uncrated)
IN-5H12-SQ-OF-FS	1443 x 1207 x 770	- kg

Crated weights and dimensions vary. Please contact us for information on your shipment.

Installation note:

Model cutout dimensions: IN-5H12-SQ-OF-FS models require 1160 x 725mm benchtop cutout. Joinery height 603mm (see product manual for installation guide).

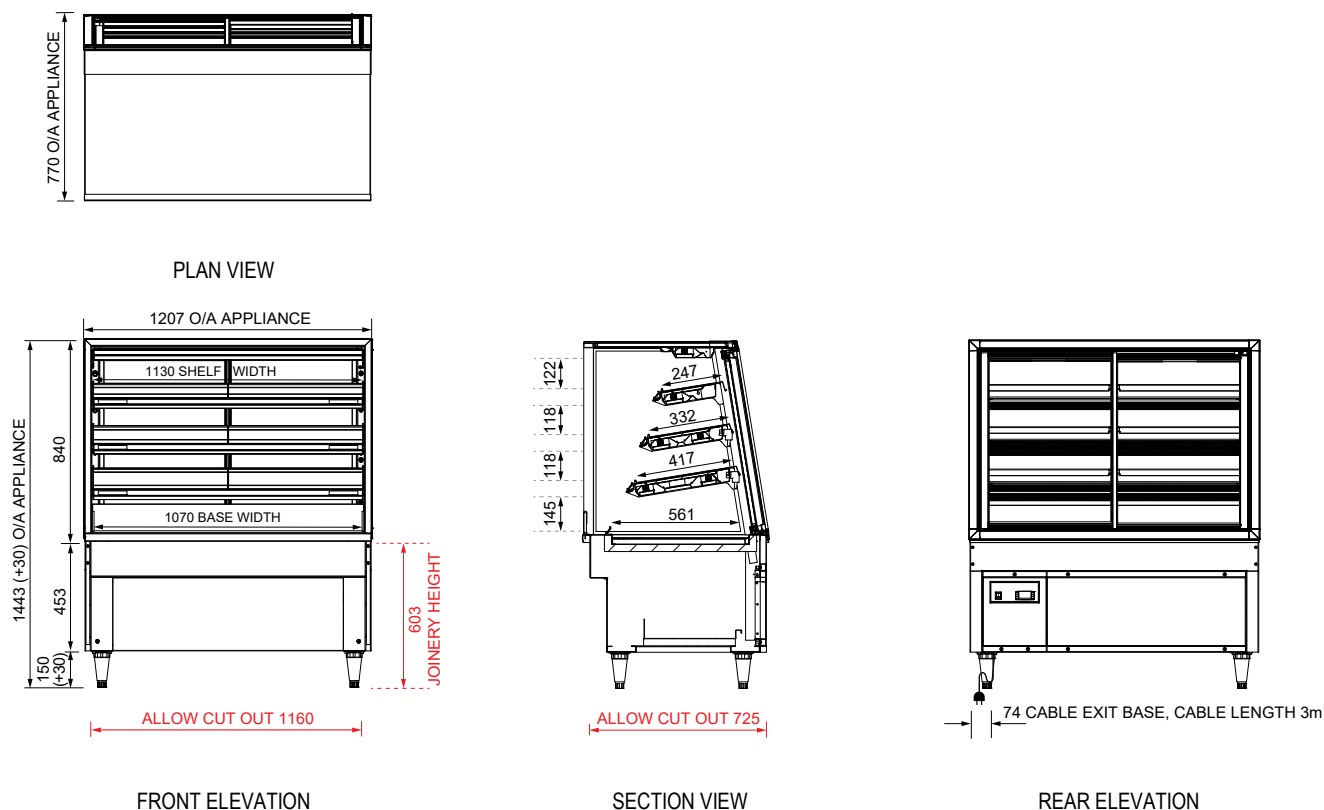

For information on technical data and installation guidelines please contact support@fpgworld.com

In line with our policy to continually develop, improve and support our products, Future Products Group Ltd reserves the right to change specifications and design without notice.

Have a question? Please email us at sales@fpgworld.com or visit www.fpgworld.com for full contact details for your region.

