






RANGE	VISAIR ISLAND
TEMPERATURE	HEATED
MODEL	IN-H-IS-1800-A001
FRONT	OPEN FRONT
INSTALLATION	FREESTANDING/CASTORS
HEIGHT	1514mm
WIDTH	1819mm
DEPTH	1448mm

TEMPERATURE RANGE	+65°C – +85°C
RECOMMENDED CORE PRODUCT TEMPERATURE	+65°C – +80°C
ENVIRONMENTAL TEST CONDITIONS	22°C / 65% RH






## FEATURES

-  **High energy efficiency: 5.77 kWh per hour (average)**
-  **Cabinet operating temperature range +65°C - +85°C**  
**Recommended core product temperature +65°C - +80°C**
- Robust open front display, powdercoated satin black for a sleek finish

### Open Front Heated Display

-  Two full-width display levels: four fixed **IWave** quartz infrared shelves and heated base
-  Each **IWave** shelf is brushed stainless steel and is fitted with ticket strip to front: 30mm (height), with caution decal applied. Each shelf is supplied with 1x 837mm width removable aluminium drip tray
- Display area of 2.9m<sup>2</sup> accommodates 120 cooked chickens assuming tray sizes of 155mm x 195mm
-  Pluggable 25,000 hour LED lighting system at 2758 lumens per metre in cabinet top and to each shelf
- Base ticket strip: 30mm (height) with caution decal applied

### Operational Excellence

- Easy 'plug and play' installation
-  FPG **IWave** heating technology uses low-wattage quartz infrared elements complemented with a heating coil in the base for even temperature distribution and extended shelf life
-  Fitted with an electronic controller for energy efficiency
-  Safer for consumers - display surfaces are maintained < +65°C and the internal air temperature is lower than in many fan-assisted cabinets
-  No noise pollution - this cabinet runs silently
-  Constructed from stainless and mild steel with single-glazed, toughened safety glass for maximum energy efficiency, climate control and durability
- Fitted with castors to support manoeuvrability



Showing : Visair Island heated 1800mm with four **IWave** shelves and base fitted with a protective crash rail, powdercoated black, on all sides

## OPTIONS & ACCESSORIES

Contact a [FPG Sales Representative](#) for our full range, including:

- Drip tray: Colour and woodprint options available
- Branded decals
- Crash rail
- Custom colour



### HEATED DATA

MODEL	TEMPERATURE RANGE	RECOMMENDED CORE PRODUCT TEMPERATURE	ENVIRONMENTAL TEST CONDITIONS	IWAVE HEATING
IN-H-IS-1800-A001	+65°C - +85°C	+65°C - +80°C	22°C / 65% RH	Low-wattage infrared quartz elements

### ELECTRICAL DATA

MODEL	VOLTAGE	PHASE	CURRENT <sup>1</sup>	E24H <sup>2</sup> (kWh)	kWh per hour	kWh per hour per m <sup>2</sup>	MAINS		LED LIGHTING		
							CONNECTION	CONNECTION PLUG	HOURS	LUMENS	COLOUR
IN-H-IS-1800-A001	220-240 V	Single	2 x 17.3 A	138.4	5.77	1.97	Fixed wiring <sup>3</sup>	N/A	25,000	2758 per metre	Natural

<sup>1</sup>Current is the maximum potential current draw at 240v with +5% element tolerance.

<sup>2</sup>Nominal power consumption per 24h, i.e: 230V at 0% energy tolerance.

<sup>3</sup>Fixed wiring supply - two cable feeds. Please see the manual for more information.





### CAPACITY, ACCESS & CONSTRUCTION

MODEL	SHELF DISPLAY AREA	LEVELS	ACCESS FRONT	ACCESS REAR	CHASSIS CONSTRUCTION	IP RATING
IN-H-IS-1800-A001	2.93 m <sup>2</sup>	2 (4 Shelves) + Base	Open front	N/A	Stainless 304 and mild steel	IP 22

### DIMENSIONS

MODEL	H x W x D mm (Uncrated)	MASS (Uncrated)
IN-H-IS-1800-A001	1514 x 1819 x 1448	- kg

Crated weights and dimensions vary. Please contact us for information on your shipment.

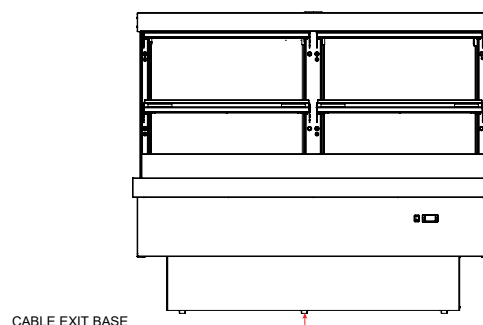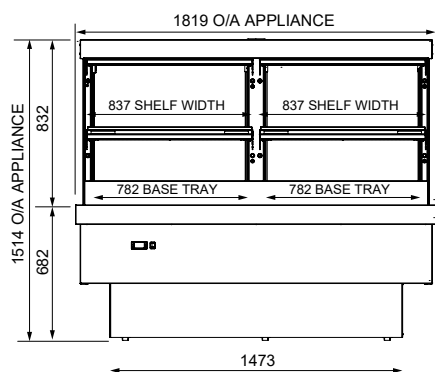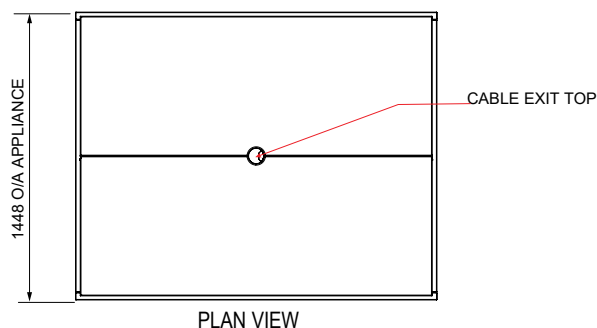

For information on technical data and installation guidelines please contact [support@fpgworld.com](mailto:support@fpgworld.com)

In line with our policy to continually develop, improve and support our products, Future Products Group Ltd reserves the right to change specifications and design without notice.

Have a question? Please email us at [sales@fpgworld.com](mailto:sales@fpgworld.com) or visit [www.fpgworld.com](http://www.fpgworld.com) for full contact details for your region.

