




FPGWORLD.COM

visair

UPRIGHT 700
OPEN FRONT
REFRIGERATED: R290

| | |
|---------------|----------------------|
| RANGE | VISAIR UPRIGHT |
| TEMPERATURE | REFRIGERATED |
| MODEL | IN-VA07-BXXX |
| FRONT | OPEN FRONT |
| INSTALLATION | FREESTANDING/ROLLERS |
| REFRIGERATION | INTEGRAL, R290 |
| HEIGHT | 1431mm |
| WIDTH | 706mm |
| DEPTH | 816mm |

| | |
|-------------------------------|----------------------------------|
| CORE PRODUCT TEMPERATURE | +2°C – +4°C |
| ENVIRONMENTAL TEST CONDITIONS | CLIMATE CLASS 3 25°C / 60% RH |
| CABINET CLASSIFICATION | 3MO |

| ENERGY EFFICIENCY | |
|--|--|
| NZ & AU For Star Rating, please visit: reg.energyrating.gov.au/ comparator | EU For EPREL Rating, please visit:  |


FEATURES

 **High energy efficiency: 0.65 kWh per hour (average)**






 **Maintains an average of +2°C - +4°C core product temperature at Climate Class 3: 25°C/60%RH**

- Robust open front display, powdercoated satin black for a sleek finish

Open Front Refrigerated Display

- Four full-width display levels: three shelves and base are powdercoated black with textured stipple finish and full cabinet width to support maximum display capacity
-  Pluggable 50,000 hour LED lighting system at 1500 lumens per metre in cabinet top and to each shelf
- Base ticket strip: 25mm

Operational Excellence

-  Constructed from mild steel - powdercoated satin black with fully double-glazed, toughened safety glass for maximum energy efficiency, climate control and durability
-  High capacity EC (electronically controlled) energy saving and low noise fans
-  Electronic controller ensures the cabinet is operating as efficiently as possible
-  Cabinet features an 'air curtain' to retain cold air within cabinet
-  Configured with a pre-filter - with regular cleaning by operations staff the life of the cabinet can be extended
- Auto Condensate Removal (ACR)
- Fitted with protective black buffer rail at base front and sides
- Fitted with unidirectional rollers and adjustable stabilisers



Showing : Visair Upright refrigerated 700mm freestanding open front with three shelves and base

OPTIONS & ACCESSORIES

Contact a [FPG Sales Representative](#) for our full range, including:

- Two full-width shelf option
- Shelf : Colour and woodprint options available
- Shelf ticket strip: 30mm
- Custom colour
- Branded decals
- Lockable castors
- Gravity feed system
- Night curtain
- Custom joinery solution



Please contact FPG to discuss your requirements for meeting country-specific standards.

FPGWORLD.COM

REFRIGERATION DATA

| MODEL | CORE PRODUCT TEMPERATURE | ENVIRONMENTAL TEST CONDITIONS | REFRIGERATION | REFRIGERANT | A LIMIT | CONDENSATE REMOVAL |
|--------------|--------------------------|---------------------------------|---------------|-------------|---------|--------------------|
| IN-VA07-BXXX | +2°C – +4°C | Climate Class 3 - 25°C / 60% RH | Integral | R290 | N/A | ACR |

ELECTRICAL DATA

| MODEL | VOLTAGE | PHASE | CURRENT | E24H (kWh) | kWh per hour (average) | IP RATING | MAINS | | LED LIGHTING | | |
|--------------|-----------|--------|---------|------------|------------------------|-----------|-----------------------|------------------------------|--------------|----------------|---------|
| | | | | | | | CONNECTION | CONNECTION PLUG ¹ | HOURS | LUMENS | COLOUR |
| IN-VA07-BXXX | 220-240 V | Single | 6.2 A | 15.83 | 0.65 | IP 22 | 3 metre, 3 core cable | 10 amp, 3 pin plug | 50,000 | 1500 per metre | Natural |

¹Please advise country to change plug specification.

CAPACITY, ACCESS & CONSTRUCTION

| MODEL | SHELF DISPLAY AREA | LEVELS | ACCESS FRONT | ACCESS REAR | CHASSIS CONSTRUCTION |
|--------------|---------------------|------------------|--------------|-------------|------------------------------|
| IN-VA07-BXXX | 0.86 m ² | 3 Shelves + Base | Open front | N/A | Stainless 304 and mild steel |


DIMENSIONS

| MODEL | H x W x D mm (Uncrated) | MASS (Uncrated) |
|--------------|-------------------------|-----------------|
| IN-VA07-BXXX | 1431 x 706 x 816 | - kg |


Crated weights and dimensions vary. Please contact us for information on your shipment.

Installation note: Designed to be installed as a stand alone unit.


UNOBSTRUCTED AIRFLOW MUST BE MAINTAINED TO ENSURE UNIT PERFORMANCE AND TO MAINTAIN WARRANTY. ALLOW NO LESS THAN 200mm CLEARANCE ABOVE CABINET FOR AIRFLOW.




PLAN VIEW

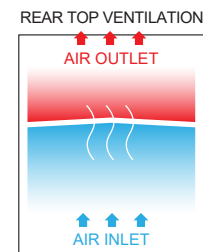


PLAN VIEW - AIRFLOW

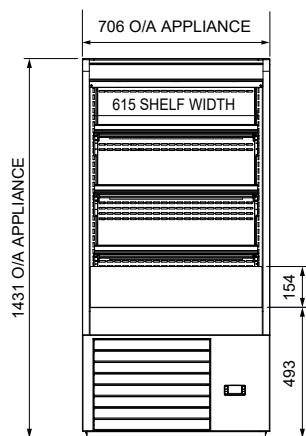

FRONT ELEVATION

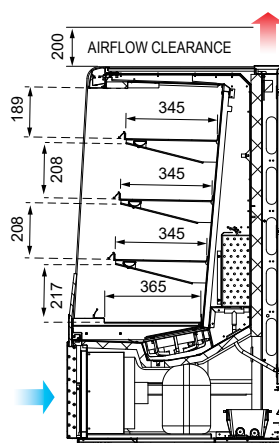

SECTION VIEW

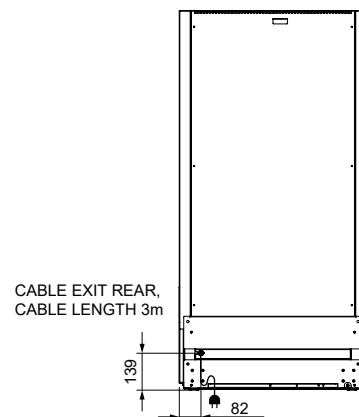

REAR ELEVATION

For information on technical data and installation guidelines please contact support@fpgworld.com

In line with our policy to continually develop, improve and support our products, Future Products Group Ltd reserves the right to change specifications and design without notice.

Have a question? Please email us at sales@fpgworld.com or visit www.fpgworld.com for full contact details for your region.

