

RANGE	VISAIR DUAL ZONE
TEMP. TOP	HEATED/OPEN FRONT
TEMP. BOTTOM	REFRIGERATED/OPEN FRONT
MODEL	IN-VA10-HC-B100
INSTALLATION	FREESTANDING/ROLLERS
REFRIGERATION	INTEGRAL, R290
TECHNOLOGY	VARIABLE SPEED DRIVE (VSD)
HEIGHT	1480mm
WIDTH	1005mm
DEPTH	714mm

TOP	TEMPERATURE RANGE	+30°C – +90°C
	ENVIRONMENTAL TEST CONDITIONS	22°C / 65% RH

BOTTOM	CORE PRODUCT TEMPERATURE	+2°C – +4°C
	ENVIRONMENTAL TEST CONDITIONS	CLIMATE CLASS 3 25°C / 60% RH
	CABINET CLASSIFICATION	3M1

ENERGY EFFICIENCY	
NZ & AU For Star Rating, please visit: reg.energyrating.gov.au/comparator	EU For EPREL Rating, please visit: 

FEATURES

High energy efficiency:

- 0.85 kWh per hour (average) for heated zone**
- 0.33 kWh per hour (average) for refrigerated zone**

- Robust open front display, powdercoated satin black for a sleek finish

Open Front Heated Top Display

Cabinet operating temperature range +30°C - +90°C Recommended core product temperature +65°C - +80°C

- Two full-width display levels - one fixed FPG **IWave** shelf plus heated base made from brushed stainless steel, both fitted with ticket strips to front: 30mm (height), with caution decals applied. Each level is supplied with 3 x 312mm width removable aluminium drip trays
- Pluggable 25,000 hour LED lighting system at 2758 lumens per metre in cabinet top and shelf
- FPG **IWave** heating technology uses low-wattage quartz infrared elements complemented with a heating coil in the base for even temperature distribution and extended shelf life

Open Front Refrigerated Bottom Display

Maintains an average of +2°C - +4°C core product temperature at Climate Class 3: 25°C/60%RH

- Two full-width display levels - one adjustable stainless steel shelf plus base, both fitted with ticket strips to front: 30mm (height)
- Variable speed drive inverter compressor and electronic controller ensure the cabinet is operating as efficiently as possible
- Pluggable 50,000 hour LED lighting system at 2758 lumens per metre in the shelf and at the top and bottom of refrigerated display

Operational Excellence

- Constructed from stainless and mild steel with fully double-glazed, toughened safety glass for maximum energy efficiency, climate control and durability
- Refrigerated zone features: High capacity EC (electronically controlled) energy saving and low noise fans, an 'air curtain' to retain cold air within cabinet, auto condensate removal (ACR)
- Fitted with unidirectional rollers and adjustable stabilisers



Showing : Visair Dual Zone
heated/refrigerated 1000mm with four levels



OPTIONS & ACCESSORIES

Contact a [FPG Sales Representative](#) for our full range, including:

- | | | |
|--------------------|---------------------|---------------------------|
| • Custom colour | Heated zone: | Refrigerated zone: |
| • Branded decals | • Product trays | • Night curtain |
| • Lockable castors | • Pie chutes | • Gravity feed system |
| • Buffer rail | | |

DUAL ZONE 1000 OPEN FRONT WITH 4 LEVELS HEATED / REFRIGERATED: R290 VSD

HEATED DATA

MODEL	TEMPERATURE RANGE	RECOMMENDED CORE PRODUCT TEMPERATURE	ENVIRONMENTAL TEST CONDITIONS	IWAVE HEATING	HEATING
IN-VA10-HC-B100	+30°C - +90°C	+65°C - +80°C	22°C / 65% RH	3 x 600 watt quartz	1 x 90 watt base heating

REFRIGERATION DATA

MODEL	CORE PRODUCT TEMPERATURE	ENVIRONMENTAL TEST CONDITIONS	REFRIGERATION	REFRIGERANT	A LIMIT	REFRIGERANT CHARGE	VALVES	CONDENSATE REMOVAL
IN-VA10-HC-B100	+2°C - +4°C	Climate Class 3 - 25°C / 60% RH	Integral - VSD	R290	9.57 m²	See serial label	Capillary	ACR

ELECTRICAL DATA

MODEL	VOLTAGE	PHASE	CURRENT	E24H (kWh)	kWh per hour (average)	IP RATING	MAINS		LED LIGHTING		
							CONNECTION	CONNECTION PLUG ²	HOURS	LUMENS	COLOUR
TOP DISPLAY	220-240 V	Single	6.6 A	20.4	0.85	IP 22	3 metre 3 core cable	10 amp 3 pin plug	25,000	2758 per metre	Natural
BOTTOM DISPLAY			2.7 A	7.86	0.33				50,000		

²Please advise country to change plug specification.

CAPACITY, ACCESS & CONSTRUCTION

MODEL	TOP DISPLAY AREA	BOTTOM DISPLAY AREA	LEVELS - TOP	LEVELS - BOTTOM	ACCESS FRONT	ACCESS REAR	CHASSIS CONSTRUCTION
IN-VA10-HC-B100	0.77 m²	0.75 m²	1 Shelf + Base	1 Shelf + Base	Open front	N/A	Stainless 304 and mild steel


DIMENSIONS

MODEL	H x W x D mm (Uncrated)	MASS (Uncrated)
IN-VA10-HC-B100	1480 x 1005 x 714	235 kg


Crated weights and dimensions vary. Please contact us for information on your shipment.

Installation note: Designed to be installed as a stand alone unit


UNOBSTRUCTED AIRFLOW MUST BE MAINTAINED TO ENSURE UNIT PERFORMANCE AND TO MAINTAIN WARRANTY.




PLAN VIEW




PLAN VIEW - AIRFLOW

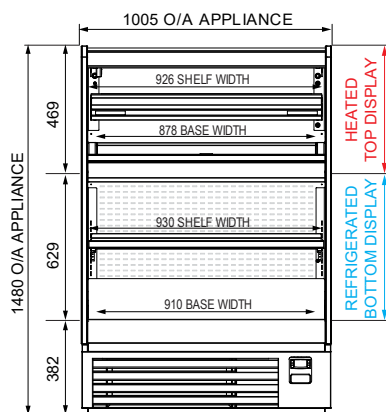

FRONT ELEVATION

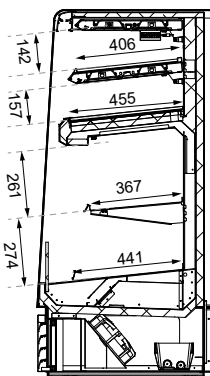

SECTION VIEW

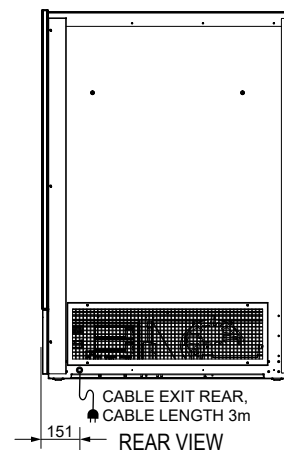

REAR VIEW

For information on technical data and installation guidelines please contact support@fpgworld.com

In line with our policy to continually develop, improve and support our products, Future Products Group Ltd reserves the right to change specifications and design without notice.

Have a question? Please email us at sales@fpgworld.com or visit www.fpgworld.com for full contact details for your region.

Worldwide
contact
details:

