



FPGWORLD.COM

visair

UPRIGHT 1000 FRONT SLIDING DOORS REFRIGERATED: R290 VSD

RANGE	VISAIR UPRIGHT
TEMPERATURE	REFRIGERATED
MODEL	IN-VA10-SQ-SD-B1XX
FRONT	SLIDING DOORS
INSTALLATION	FREESTANDING/ROLLERS
REFRIGERATION	INTEGRAL, R290
TECHNOLOGY	VARIABLE SPEED DRIVE (VSD)
HEIGHT	1480mm
WIDTH	1096mm
DEPTH	855mm

CORE PRODUCT TEMPERATURE	+2°C – +4°C
ENVIRONMENTAL TEST CONDITIONS	CLIMATE CLASS 3 25°C / 60% RH
CABINET CLASSIFICATION	3M1

ENERGY EFFICIENCY	
NZ & AU For Star Rating, please visit: reg.energyrating.gov.au/ comparator	EU For EPREL Rating, please visit: 

FEATURES

 **Maximum energy efficiency: 0.32 kWh per hour (average)**

 **Maintains an average of +2°C - +4°C core product temperature at Climate Class 3: 25°C/60%RH**

- Robust display with sliding doors (customer side), powdercoated satin black for a sleek finish

Sliding Doors Refrigerated Display

- Four full-width display levels: three shelves and base are powdercoated black with textured stipple finish and full cabinet width to support maximum display capacity
-  Pluggable 50,000 hour LED lighting system at 1500 lumens per metre in cabinet top and to each shelf
- Base ticket strip: 25mm

Operational Excellence

-  Constructed from stainless and mild steel - powdercoated satin black with fully double-glazed, toughened safety glass for maximum energy efficiency, climate control and durability
-  Fitted with high capacity EC (electronically controlled) energy saving and low noise fans
-  Variable speed drive inverter compressor and electronic controller ensure the cabinet is operating as efficiently as possible
-  Configured with a pre-filter - with regular cleaning by operations staff the life of the cabinet can be extended
- Auto Condensate Removal (ACR)
- Fitted with protective black buffer rail at base front and sides
- Fitted with unidirectional rollers and adjustable stabilisers



Showing : Visair Upright refrigerated 1000mm freestanding sliding doors with three shelves and base

OPTIONS & ACCESSORIES

Contact a [FPG Sales Representative](#) for our full range, including:

- Full-width shelf options:
 - Two or four
- Split shelving options:
 - Two, three or four split shelves on each side
- Shelf: Colour and woodprint options available
- Shelf ticket strip: 30mm
- Custom colour
- Branded decals
- Lockable castors
- Gravity feed system
- Custom joinery solution



Please contact FPG to discuss your requirements for meeting country-specific standards.

FPGWORLD.COM

REFRIGERATION DATA

MODEL	CORE PRODUCT TEMPERATURE	ENVIRONMENTAL TEST CONDITIONS	REFRIGERATION	REFRIGERANT	A LIMIT	CONDENSATE REMOVAL
IN-VA10-SQ-SD-B1XX	+2°C – +4°C	Climate Class 3 - 25°C / 60% RH	Integral - VSD	R290	N/A	ACR

ELECTRICAL DATA

MODEL	VOLTAGE	PHASE	CURRENT	E24H (kWh)	kWh per hour (average)	IP RATING	MAINS		LED LIGHTING		
							CONNECTION	CONNECTION PLUG ¹	HOURS	LUMENS	COLOUR
IN-VA10-SQ-SD-B1XX	220-240 V	Single	2.7 A	7.66	0.32	IP 21	3 metre 3 core cable	10 amp 3 pin plug	50,000	1500 per metre	Natural

¹Please advise country to change plug specification.

CAPACITY, ACCESS & CONSTRUCTION

MODEL	SHELF DISPLAY AREA	LEVELS	ACCESS FRONT	ACCESS REAR	CHASSIS CONSTRUCTION
IN-VA10-SQ-SD-B1XX	1.4 m ²	3 Shelves + Base	Sliding doors	N/A	Stainless 304 and mild steel


DIMENSIONS

MODEL	H x W x D mm (Uncrated)	MASS (Uncrated)
IN-VA10-SQ-SD-B1XX	1480 x 1096 x 855	260 kg


Crated weights and dimensions vary. Please contact us for information on your shipment.

Installation note: Designed to be installed as a stand alone unit.


UNOBSTRUCTED AIRFLOW MUST BE MAINTAINED TO ENSURE UNIT PERFORMANCE AND TO MAINTAIN WARRANTY. ALLOW NO LESS THAN 200mm CLEARANCE ABOVE CABINET FOR AIRFLOW.




PLAN VIEW




PLAN VIEW - AIRFLOW

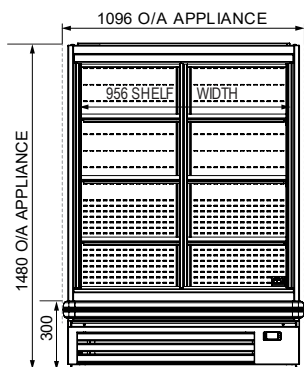

SECTION VIEW

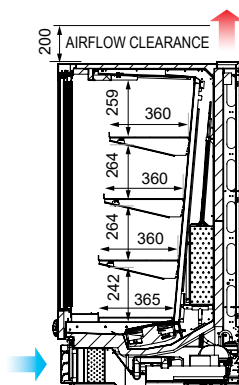

FRONT ELEVATION

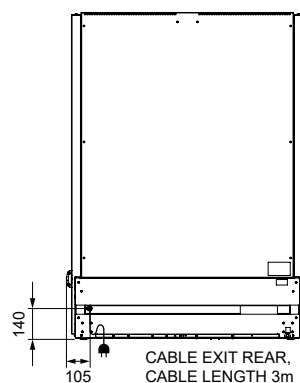

REAR VIEW

For information on technical data and installation guidelines please contact support@fpgworld.com

In line with our policy to continually develop, improve and support our products, Future Products Group Ltd reserves the right to change specifications and design without notice.

Have a question? Please email us at sales@fpgworld.com or visit www.fpgworld.com for full contact details for your region.

Worldwide
contact
details:

