



FPGWORLD.COM

# visair

## UPRIGHT 2000 FRONT SLIDING DOORS REFRIGERATED: R290 VSD

RANGE	VISAIR UPRIGHT
TEMPERATURE	REFRIGERATED
MODEL	IN-VA20-SQ-SD-B1XX
FRONT	SLIDING DOORS
INSTALLATION	FREESTANDING/ROLLERS
REFRIGERATION	INTEGRAL, R290
TECHNOLOGY	VARIABLE SPEED DRIVE (VSD)
HEIGHT	1480mm
WIDTH	2110mm
DEPTH	855mm

CORE PRODUCT TEMPERATURE	+2°C – +4°C
ENVIRONMENTAL TEST CONDITIONS	CLIMATE CLASS 3 25°C / 60% RH
CABINET CLASSIFICATION	3M1

### ENERGY EFFICIENCY

The Visair Upright Refrigerated 2000 with front sliding doors (IN-VA20-SQ-SD) is comprised of 2x Visair Upright Refrigerated 1000 with front sliding doors (IN-VA10-SQ-SD), each with its own independently powered refrigeration system.

NZ &amp; AU

For the Star Rating,  
please search for 'IN-VA10'  
at [reg.energyrating.gov.au/  
comparator](http://reg.energyrating.gov.au/comparator)

EU

For EPREL Rating, please visit:



## FEATURES

**Maximum energy efficiency: 0.64 kWh per hour (average)**

**Maintains an average of +2°C - +4°C core product temperature at Climate Class 3: 25°C/60%RH**

- Robust display with sliding doors (customer side), powdercoated satin black for a sleek finish

### Sliding Doors Refrigerated Display

- Four full-width display levels: three shelves and base are powdercoated black with textured stipple finish and full cabinet width to support maximum display capacity
- Pluggable 50,000 hour LED lighting system at 1500 lumens per metre in cabinet top and to each shelf
- Base ticket strip: 25mm

### Operational Excellence

- Constructed from stainless and mild steel - powdercoated satin black with fully double-glazed, toughened safety glass for maximum energy efficiency, climate control and durability
- Fitted with high capacity EC (electronically controlled) energy saving and low noise fans
- Variable speed drive inverter compressor and electronic controller ensure the cabinet is operating as efficiently as possible
- Configured with a pre-filter - with regular cleaning by operations staff the life of the cabinet can be extended
- Auto Condensate Removal (ACR)
- Fitted with protective black buffer rail at base front and sides
- Fitted with unidirectional rollers and adjustable stabilisers



Showing : Visair Upright refrigerated 2000mm freestanding sliding doors with three shelves and base

## OPTIONS & ACCESSORIES

Contact a [FPG Sales Representative](#) for our full range, including:

- Full-width shelf options:  
Two or four
- Split shelving options:  
Two, three or four split shelves on each side
- Shelf: Colour and woodprint options available
- Shelf ticket strip: 30mm
- Custom colour
- Branded decals
- Lockable castors
- Gravity feed system
- Custom joinery solution



Please contact FPG to discuss your requirements for meeting country-specific standards.

FPGWORLD.COM

### REFRIGERATION DATA

MODEL	CORE PRODUCT TEMPERATURE	ENVIRONMENTAL TEST CONDITIONS	REFRIGERATION	REFRIGERANT	A LIMIT	CONDENSATE REMOVAL
IN-VA20-SQ-SD-B1XX	+2°C – +4°C	Climate Class 3 - 25°C / 60% RH	Integral - VSD	R290	N/A	ACR

### ELECTRICAL DATA

MODEL	VOLTAGE	PHASE	CURRENT	E24H (kWh)	kWh per hour (average)	IP RATING	MAINS		LED LIGHTING		
							CONNECTION	CONNECTION PLUG <sup>1</sup>	HOURS	LUMENS	COLOUR
IN-VA20-SQ-SD-B1XX	220-240 V	Single	2 x 2.7 A	15.36	0.64	IP 21	2 x 3 metre 3 core cable	2 x 10 amp 3 pin plug	50,000	1500 per metre	Natural

<sup>1</sup>Please advise country to change plug specification.

### CAPACITY, ACCESS & CONSTRUCTION

MODEL	SHELF DISPLAY AREA	LEVELS	ACCESS FRONT	ACCESS REAR	CHASSIS CONSTRUCTION
IN-VA20-SQ-SD-B1XX	2.8 m <sup>2</sup>	3 Shelves + Base	Sliding doors	N/A	Stainless 304 and mild steel


### DIMENSIONS

MODEL	H x W x D mm (Uncrated)	MASS (Uncrated)
IN-VA20-SQ-SD-B1XX	1480 x 2110 x 855	460 kg


Crated weights and dimensions vary. Please contact us for information on your shipment.

**Installation note:** Designed to be installed as a stand alone unit.


**UNOBSTRUCTED AIRFLOW MUST BE MAINTAINED TO ENSURE UNIT PERFORMANCE AND TO MAINTAIN WARRANTY. ALLOW NO LESS THAN 200mm CLEARANCE ABOVE CABINET FOR AIRFLOW.**

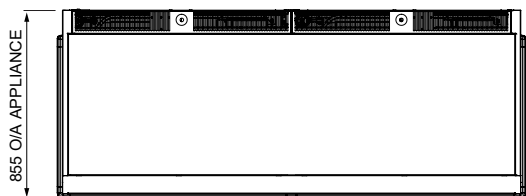


PLAN VIEW

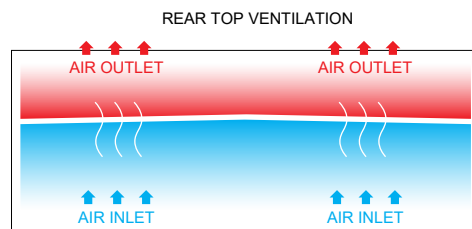


PLAN VIEW - AIRFLOW

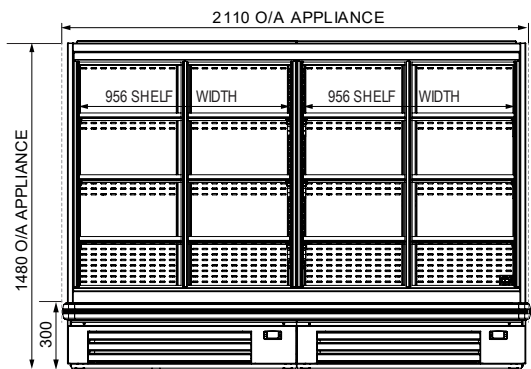

SECTION VIEW

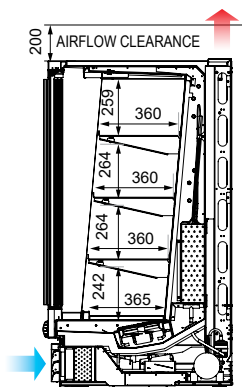

FRONT ELEVATION

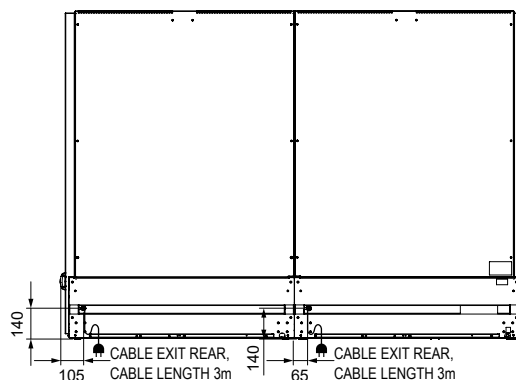

REAR VIEW

For information on technical data and installation guidelines please contact [support@fpgworld.com](mailto:support@fpgworld.com)

In line with our policy to continually develop, improve and support our products, Future Products Group Ltd reserves the right to change specifications and design without notice.

Have a question? Please email us at [sales@fpgworld.com](mailto:sales@fpgworld.com) or visit [www.fpgworld.com](http://www.fpgworld.com) for full contact details for your region.

