



FPGWORLD.COM

visair

SLIMLINE 1800
OPEN FRONT
REFRIGERATED: R449A

RANGE	VISAIR SLIMLINE
TEMPERATURE	REFRIGERATED
MODEL	IN-VSL18-AXXX
FRONT	OPEN FRONT
INSTALLATION	FREESTANDING/ROLLERS
REFRIGERATION	INTEGRAL, R449A
HEIGHT	2074mm
WIDTH	1786mm
DEPTH	561mm

CORE PRODUCT TEMPERATURE	+2°C – +4°C
ENVIRONMENTAL TEST CONDITIONS	CLIMATE CLASS 3 25°C / 60% RH
CABINET CLASSIFICATION	3M1

ENERGY EFFICIENCY
NZ & AU (R449A) For Star Rating, please visit reg.energyrating.gov.au/comparator

FEATURES

- High energy efficiency: 1.55 kWh per hour (average)**
- Maintains an average of +2°C - +4°C core product temperature at Climate Class 3 25°C/60%RH**
- Robust open front display, powdercoated satin black with a combination of brushed and polished stainless steel for the interior
- Ultra slim footprint at 561mm depth;
 - ideal for maximising product facings with reduced stock holdings in space-constrained environments
 - designed to fit in two bays of standard shelving, matching the modular shelf footprint of many supermarket aisles

Open Front Refrigerated Display

- The cabinet has ten half-width relocatable shelves that can be:
 - Installed to provide five shelving levels across the full width of the cabinet
 - Installed in a staggered layout to enable cross merchandising and superior visual display
- 50,000 hour powerful LED top and side lighting at 2650 lumens per metre focuses buyer attention on displayed products
- Ticket strip to shelves and base: 30mm

Operational Excellence

- Constructed from stainless and mild steel for maximum energy efficiency, climate control and durability
- Cabinet features an 'air curtain' to retain cold air within cabinet
- Configured with a pre-filter - with regular cleaning by operations staff the life of the cabinet can be extended
- Auto Condensate Removal (ACR)
- Fitted with unidirectional rollers and adjustable stabilisers



Please contact FPG to discuss your requirements for meeting country-specific standards.



Showing : Visair Slimline refrigerated 1800mm freestanding open front with five full-width shelf display levels and base

OPTIONS & ACCESSORIES

Contact a [FPG Sales Representative](#) for our full range, including:

- Remote refrigeration with TX, EPR or Solenoid valves for connection. Further refrigerants supported
- Shelf: Colour and woodprint options available
- Custom colour
- Branded decals
- Night curtain
- Buffer rail
- Custom joinery solution

FPGWORLD.COM

REFRIGERATION DATA

MODEL	CORE PRODUCT TEMPERATURE	ENVIRONMENTAL TEST CONDITIONS	REFRIGERATION	REFRIGERANT	CONDENSATE REMOVAL
IN-VSL18-AXXX	+2°C - +4°C	Climate Class 3 - 25°C / 60% RH	Integral	R449A	ACR/Plumb to waste

ELECTRICAL DATA

MODEL	VOLTAGE	PHASE	CURRENT	E24H (kWh)	kWh per hour (average)	IP RATING	MAINS		LED LIGHTING		
							CONNECTION	CONNECTION PLUG ¹	HOURS	LUMENS	COLOUR
IN-VSL18-AXXX (Plumb to waste)	220-240 V	Single	7.4 A	21.36	0.89	IP 21	3 metre 3 core cable	10 amp 3 pin plug	50,000	2650 per metre	Natural
IN-VSL18-AXXX (ACR)			13.8 A	37.23	1.55	IP 21	3 metre 3 core cable	15 amp 3 pin plug			

¹Please advise country to change plug specification.

CAPACITY, ACCESS & CONSTRUCTION

MODEL	SHELF DISPLAY AREA	LEVELS	ACCESS FRONT	ACCESS REAR	(Ø) 66mm CAN CAPACITY	(Ø) 60mm BOTTLE CAPACITY	CHASSIS CONSTRUCTION
IN-VSL18-AXXX	3.05 m ²	5 Shelves + Base	Open front	N/A	584	576	Stainless 304 and mild steel


DIMENSIONS

MODEL	H x W x D mm (Uncrated)	MASS (Uncrated)
IN-VSL18-AXXX	2074 x 1786 x 561	404 kg


Crated weights and dimensions vary. Please contact us for information on your shipment.

Installation note: Designed to be installed as a stand alone unit.


UNOBSTRUCTED AIRFLOW MUST BE MAINTAINED TO ENSURE UNIT PERFORMANCE AND TO MAINTAIN WARRANTY. CABINET MUST BE BOLTED TO THE FLOOR FOR SECURE INSTALLATION. PLEASE REFER TO MANUAL FOR FULL INSTALLATION INSTRUCTIONS.

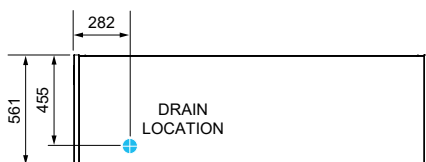


PLAN

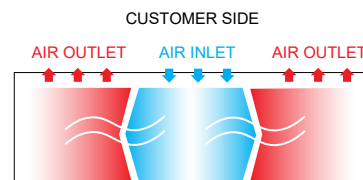


PLAN VIEW - AIRFLOW

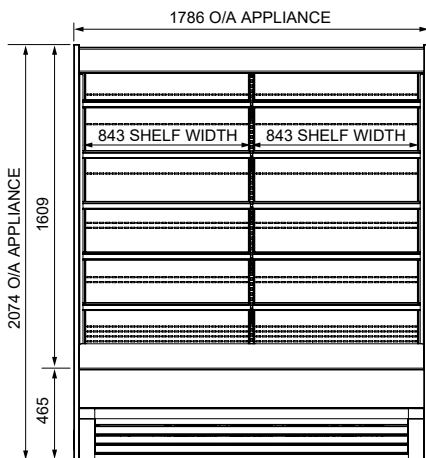


FRONT ELEVATION

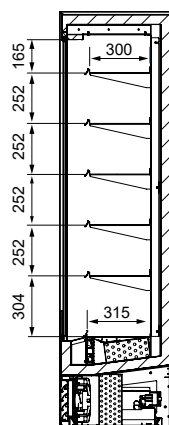

SECTION VIEW

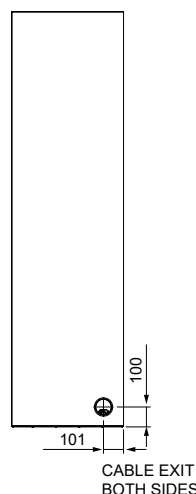

CABLE EXIT BOTH SIDES

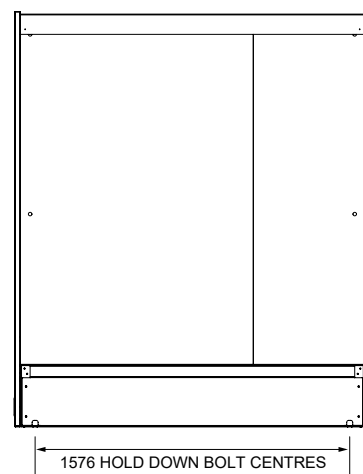

REAR ELEVATION

For information on technical data and installation guidelines please contact support@fpgworld.com

In line with our policy to continually develop, improve and support our products, Future Products Group Ltd reserves the right to change specifications and design without notice.

Have a question? Please email us at sales@fpgworld.com or visit www.fpgworld.com for full contact details for your region.



Worldwide
contact
details: