



FPGWORLD.COM

# ENCORE

## SERIES 8 SQUARE IN-COUNTER 1200 HEATED

<b>RANGE</b>	ENCORE SERIES 8	
<b>TEMPERATURE</b>	HEATED	
<b>MODEL</b>	IN-EC12-H-08-A005	IN-EC12-H-08-A006
<b>FRONT</b>	SQUARE/ TILT FRONT	SQUARE/ SLIDING DOORS
<b>INSTALLATION</b>	IN-COUNTER	
<b>HEIGHT</b>	951mm	
<b>WIDTH</b>	1200mm	
<b>DEPTH</b>	662mm	

TEMPERATURE RANGE	+30°C – +90°C
RECOMMENDED CORE PRODUCT TEMPERATURE	+65°C - +80°C
ENVIRONMENTAL TEST CONDITIONS	22°C / 65% RH

## FEATURES

- **High energy efficiency: 0.57 kWh per hour (average)**
- **Cabinet operating temperature range +30°C - +90°C**  
**Recommended core product temperature +65°C - +80°C**
- Smart display with double-glazed glass finished with a black trim

#### Tilt Front or Sliding Doors Heated Display

- Four tiltable, height-adjustable stainless steel wire rack shelves are full cabinet width to support maximum display capacity
- 25,000 hour LED lighting system at 2758 lumens per metre in cabinet top and to each shelf
- Unique shelf mounted front ticket strip 30mm together with rear ticket holder



Showing : Encore Series 8 heated 1200mm square in-counter tilt front

## Operational Excellence

- Sliding doors (staff side) and tilt front or sliding doors options (customer side)
- Constructed from stainless and mild steel with fully double-glazed, low-E coated, toughened safety glass for maximum energy efficiency, climate control and durability
- Low wattage density element provides even temperature distribution
- Designed to be installed into joinery

## OPTIONS & ACCESSORIES

Contact a **FPG Sales Representative** for our full range, including:

- Shelf trays: Toughened safety glass or mild steel. Colour and woodprint options available for steel.
- Stainless steel product trays
- Stainless steel pie chutes
- Branded decals
- Shelf ticket strips: powdercoat colour
- Forward-facing controls
- Sides: mirror effect
- Rear Sling Doors that slide and swing
- Custom joinery solution



Please contact FPG to discuss your requirements for meeting country-specific standards.

FPGWORLD.COM

## ENCORE

SERIES 8 SQUARE  
IN-COUNTER 1200  
HEATED

## HEATED DATA

MODEL	TEMPERATURE RANGE	RECOMMENDED CORE PRODUCT TEMPERATURE	ENVIRONMENTAL TEST CONDITIONS	HEATING
IN-EC12-H-08-Axxx	+30°C - +90°C	+65°C - +80°C	22°C / 65% RH	Low-wattage, high-density element

## ELECTRICAL DATA

MODEL	VOLTAGE	PHASE	CURRENT	E24H (kWh)	kWh per hour (average)	IP RATING	MAINS		LED LIGHTING		
							CONNECTION	CONNECTION PLUG <sup>1</sup>	HOURS	LUMENS	COLOUR
IN-EC12-H-08-Axxx	220-240 V	Single	11A	13.61	0.57	IP 21	3 metre, 3 core cable	15 amp, 3 pin plug	25.000	2758 per metre	Natural

<sup>1</sup>Please advise country to change plug specification.

## CAPACITY, ACCESS &amp; CONSTRUCTION

MODEL	SHELF DISPLAY AREA	LEVELS	ACCESS FRONT	ACCESS REAR	CHASSIS CONSTRUCTION
IN-EC12-H-08-A005	171 m <sup>2</sup>	4 Shelves	Tilt front	Sliding doors	Stainless 304 and mild steel
IN-EC12-H-08-A006			Sliding doors		


## DIMENSIONS

MODEL	H x W x D mm (Uncrated)	MASS (Uncrated)
IN-EC12-H-08-A005	951 x 1200 x 662	- kg
IN-EC12-H-08-A006		


Crated weights and dimensions vary. Please contact us for information on your shipment.

**Installation note:**


Model cutout dimensions: IN-EC12-H-08-A005 & A006 models require 1178 x 650mm benchtop cutout (see product manual for installation guide).

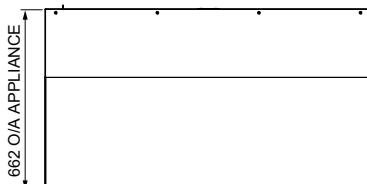


PLAN VIEW

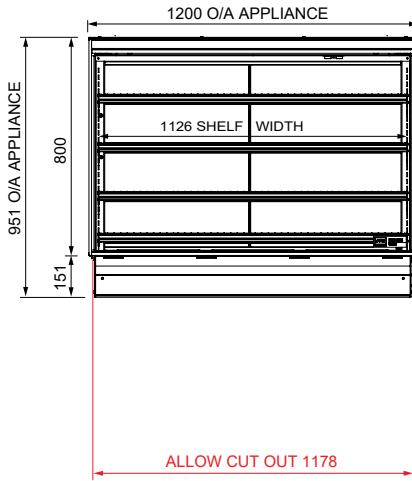

FRONT ELEVATION

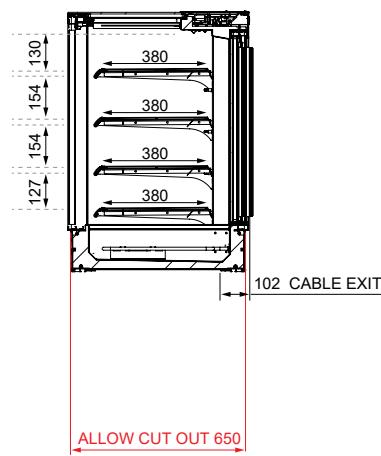

SECTION VIEW

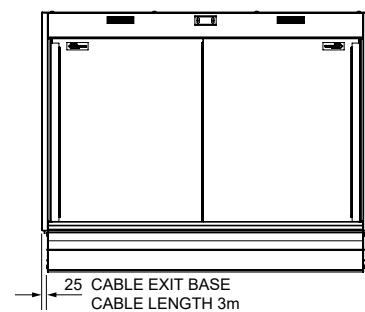

REAR ELEVATION

For information on technical data and installation guidelines please contact [support@fpgworld.com](mailto:support@fpgworld.com)

In line with our policy to continually develop, improve and support our products, Future Products Group Ltd reserves the right to change specifications and design without notice.

Have a question? Please email us at [sales@fpgworld.com](mailto:sales@fpgworld.com) or visit [www.fpgworld.com](http://www.fpgworld.com) for full contact details for your region.

