



FPGWORLD.COM

# ENCORE

SERIES 8 OPEN FRONT 900 SQUARE/FREESTANDING/3 SHELVES REFRIGERATED: R290 **VSD**

RANGE	ENCORE SERIES 8 OPEN FRONT
TEMPERATURE	REFRIGERATED
MODEL	IN-EC09-R-OF-08-B100
FRONT	SQUARE/OPEN FRONT
INSTALLATION	FREESTANDING
REFRIGERATION	INTEGRAL, R290
TECHNOLOGY	VARIABLE SPEED DRIVE (VSD)
HEIGHT	1450mm
WIDTH	900mm
DEPTH	662mm

CORE PRODUCT TEMPERATURE	+1°C – +3°C
ENVIRONMENTAL TEST CONDITIONS	CLIMATE CLASS 3 25°C / 60% RH
CABINET CLASSIFICATION	3M0

ENERGY EFFICIENCY	
NZ & AU  <b>4</b> ENERGY RATING For Star Rating, please visit <a href="http://reg.energyrating.gov.au/comparator">reg.energyrating.gov.au/comparator</a>	EU For EPREL Rating, please visit: 

## FEATURES

-  **High energy efficiency: 0.63 kWh per hour (average)**
-  **Maintains an average of +1°C - +3°C core product temperature at Climate Class 3: 25°C/60%RH**
- Smart display with double-glazed glass finished with a black trim

### Open Front Refrigerated Display

-  Three height-adjustable stainless steel shelves and base are full cabinet width to support maximum display capacity
-  50,000 hour LED lighting system at 1500 lumens per metre in cabinet top and to each shelf
- Unique front ticket strip holders 30mm on shelves and base, and to the rear of shelves

### Operational Excellence

-  Sliding doors (staff side) and open front (customer side)
-  Constructed from stainless and mild steel with fully double-glazed, low-E coated, toughened safety glass for maximum energy efficiency, climate control and durability
-  Variable speed drive inverter compressor and electronic controller ensure the cabinet is operating as efficiently as possible
-  Configured with a pre-filter - with regular cleaning by operations staff the life of the cabinet can be extended
- Auto condensate removal (ACR)
- FPG Freeflow air ventilation at rear eliminates the need for front ventilation panels
- Fitted with adjustable 150mm legs (+30mm adjustment)



Showing : Encore Series 8 Open Front refrigerated 900mm square freestanding with integral refrigeration

## OPTIONS & ACCESSORIES

Contact a [FPG Sales Representative](#) for our full range, including:

- Shelf trays: glass or mild steel. Powdercoat colour and woodprint options available for steel.
- Branded decals
- Chassis & shelf ticket strips: powdercoat colour
- Forward-facing controls
- Sides: mirror effect
- Bumper rail with optional product bin
- Tray race
- Rear Sling Doors that slide and swing
- Pull-out shelves
- Rear deck assemblies
- Toe kick
- Castors or rollers
- Thermal Film
- Night curtain
- Custom joinery solution



Please contact FPG to discuss your requirements for meeting country-specific standards.

FPGWORLD.COM



FPGWORLD.COM

# ENCORE

Series 8 OPEN FRONT 900 SQUARE/FREESTANDING/3 SHELVES REFRIGERATED: R290 **VSD**

## REFRIGERATION DATA

MODEL	CORE PRODUCT TEMPERATURE	ENVIRONMENTAL TEST CONDITIONS	REFRIGERATION	REFRIGERANT	A LIMIT	CONDENSATE REMOVAL
IN-EC09-R-OF-08-B100	+1°C - +3°C	Climate Class 3 - 25°C / 60% RH	Integral - VSD	R290	10.53 m <sup>2</sup>	Automatic

## ELECTRICAL DATA

MODEL	VOLTAGE	PHASE	CURRENT	E24H (kWh)	kWh per hour (average)	IP RATING	MAINS		LED LIGHTING		
							CONNECTION	CONNECTION PLUG <sup>1</sup>	HOURS	LUMENS	COLOUR
IN-EC09-R-OF-08-B100	220-240 V	Single	6.7 A	15.20	0.63	IP 21	3 metre, 3 core cable	10 amp, 3 pin plug	50,000	1500 per metre	Natural

<sup>1</sup>Please advise country to change plug specification.

## CAPACITY, ACCESS & CONSTRUCTION

MODEL	SHELF DISPLAY AREA	LEVELS	ACCESS FRONT	ACCESS REAR	CHASSIS CONSTRUCTION
IN-EC09-R-OF-08-B100	1.27 m <sup>2</sup>	3 Shelves + Base	Open front	Sliding doors	Stainless 304 and mild steel


## DIMENSIONS

MODEL	H x W x D mm (Uncrated)	MASS (Uncrated)
IN-EC09-R-OF-08-B100	1450 x 900 x 662	183.33 kg

Crated weights and dimensions vary. Please contact us for information on your shipment.

### Installation note:

Model cutout dimensions: IN-EC09-R-OF-08-B100 models require 908 x 668mm benchtop cutout. Joinery height 595mm (see product manual for installation guide). Optional front bumper rail recommended to complement cabinet/joinery finish. Please request a thermal film when installing a refrigerated cabinet next to an adjacent refrigerated, controlled ambient, or ambient cabinet. **UNOBSTRUCTED AIRFLOW MUST BE MAINTAINED TO ENSURE UNIT PERFORMANCE AND MAINTAIN WARRANTY.**

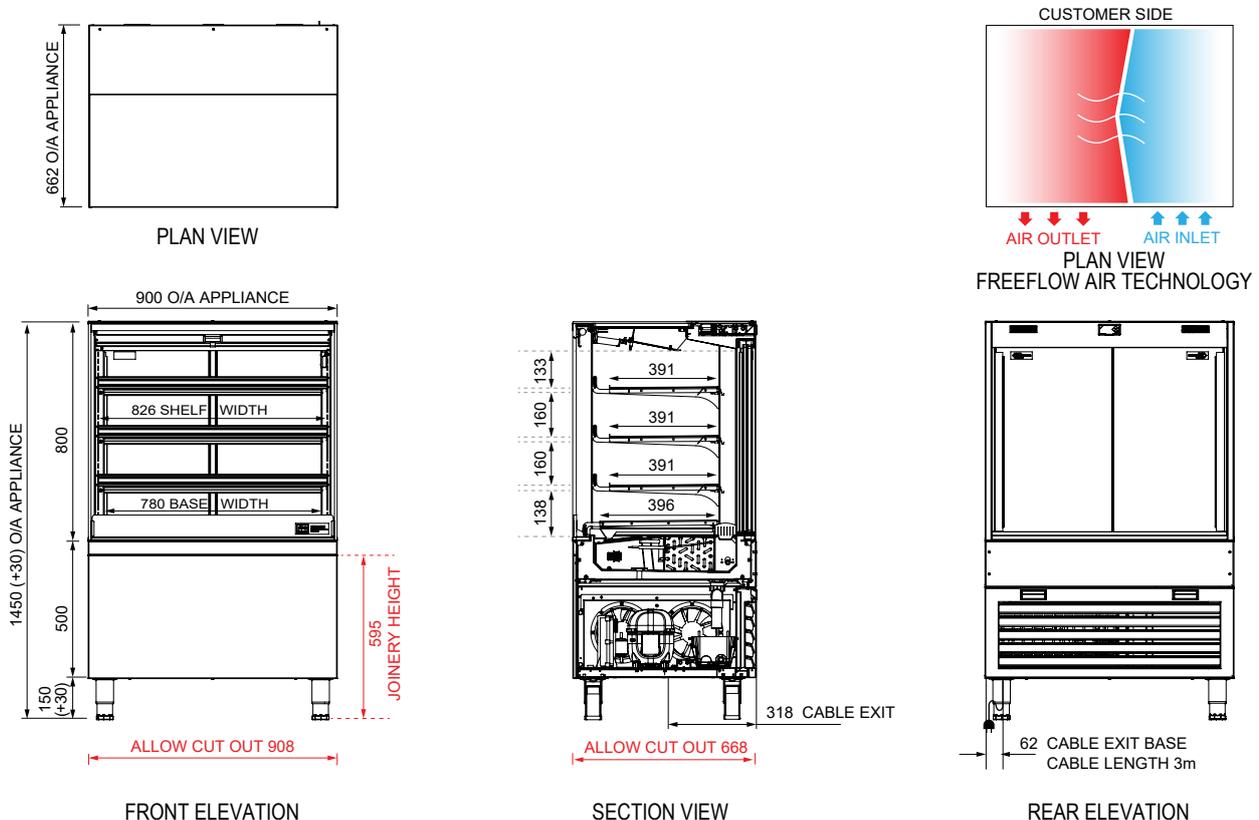

For information on technical data and installation guidelines please contact [support@fpgworld.com](mailto:support@fpgworld.com)

In line with our policy to continually develop, improve and support our products, Future Products Group Ltd reserves the right to change specifications and design without notice.

Have a question? Please email us at [sales@fpgworld.com](mailto:sales@fpgworld.com) or visit [www.fpgworld.com](http://www.fpgworld.com) for full contact details for your region.



Worldwide contact details: