



FPGWORLD.COM

ENCORE

SERIES 8 SQUARE ON-COUNTER 1200 HEATED

| | | |
|--------------|-----------------------|--------------------------|
| RANGE | ENCORE SERIES 8 | |
| TEMPERATURE | HEATED | |
| MODEL | IN-EC12-H-08-A009 | IN-EC12-H-08-A010 |
| FRONT | SQUARE/ TILT FRONT | SQUARE/ SLIDING DOORS |
| INSTALLATION | ON-COUNTER | |
| HEIGHT | 964mm | |
| WIDTH | 1200mm | |
| DEPTH | 662mm | |

| | |
|--------------------------------------|---------------|
| TEMPERATURE RANGE | +55°C - +90°C |
| RECOMMENDED CORE PRODUCT TEMPERATURE | +65°C - +80°C |
| ENVIRONMENTAL TEST CONDITIONS | 22°C / 65% RH |

FEATURES

- High energy efficiency: 0.57 kWh per hour (average)**
- Cabinet operating temperature range +55°C - +90°C**
Recommended core product temperature +65°C - +80°C

- Smart display with double-glazed glass finished with a black trim

Tilt Front or Sliding Doors Heated Display

- Four tiltable, height-adjustable stainless steel wire rack shelves are full cabinet width to support maximum display capacity
- 25,000 hour LED lighting system at 2758 lumens per metre in cabinet top and to each shelf
- Unique shelf mounted front ticket strip 30mm together with rear ticket holder

Operational Excellence

- Sliding doors (staff side) and tilt front or sliding doors options (customer side)
- Constructed from stainless and mild steel with fully double-glazed, low-E coated, toughened safety glass for maximum energy efficiency, climate control and durability
- Low wattage density element provides even temperature distribution
- Positioned on counter top



Showing : Encore Series 8 heated 1200mm square on-counter tilt front

OPTIONS & ACCESSORIES

Contact a [FPG Sales Representative](#) for our full range, including:

- Shelf trays: Toughened safety glass or mild steel. Colour and woodprint options available for steel.
- Stainless steel product trays
- Stainless steel pie chutes
- Branded decals
- Shelf ticket strips: powdercoat colour
- Forward-facing controls
- Sides: mirror effect
- Rear Sling Doors that slide and swing
- Custom joinery solution



Please contact FPG to discuss your requirements for meeting country-specific standards.

FPGWORLD.COM

HEATED DATA

| MODEL | TEMPERATURE RANGE | RECOMMENDED CORE PRODUCT TEMPERATURE | ENVIRONMENTAL TEST CONDITIONS | HEATING |
|-------------------|-------------------|--------------------------------------|-------------------------------|-----------------------------|
| IN-EC12-H-08-Axxx | +55°C – +90°C | +65°C – +80°C | 22°C / 65% RH | Low wattage density element |

ELECTRICAL DATA

| MODEL | VOLTAGE | PHASE | CURRENT | E24H (kWh) | kWh per hour (average) | IP RATING | MAINS | | LED LIGHTING | | |
|-------------------|-----------|--------|---------|------------|------------------------|-----------|-----------------------|------------------------------|--------------|------------------|---------|
| | | | | | | | CONNECTION | CONNECTION PLUG ¹ | HOURS | LUMENS per metre | COLOUR |
| IN-EC12-H-08-Axxx | 220-240 V | Single | 11 A | 13.61 | 0.57 | IP 21 | 3 metre, 3 core cable | 15 amp, 3 pin plug | 25,000 | 2758 per metre | Natural |

¹Please advise country to change plug specification.


CAPACITY, ACCESS & CONSTRUCTION

| MODEL | SHELF DISPLAY AREA | LEVELS | ACCESS FRONT | ACCESS REAR | CHASSIS CONSTRUCTION |
|-------------------|---------------------|-----------|---------------|---------------|------------------------------|
| IN-EC12-H-08-A009 | 1.71 m ² | 4 Shelves | Tilt front | Sliding doors | Stainless 304 and mild steel |
| IN-EC12-H-08-A010 | | | Sliding doors | | |

DIMENSIONS

| MODEL | H x W x D mm (Uncrated) | MASS (Uncrated) |
|-------------------|-------------------------|-----------------|
| IN-EC12-H-08-A009 | 964 x 1200 x 662 | - kg |
| IN-EC12-H-08-A010 | | |

Crated weights and dimensions vary. Please contact us for information on your shipment.

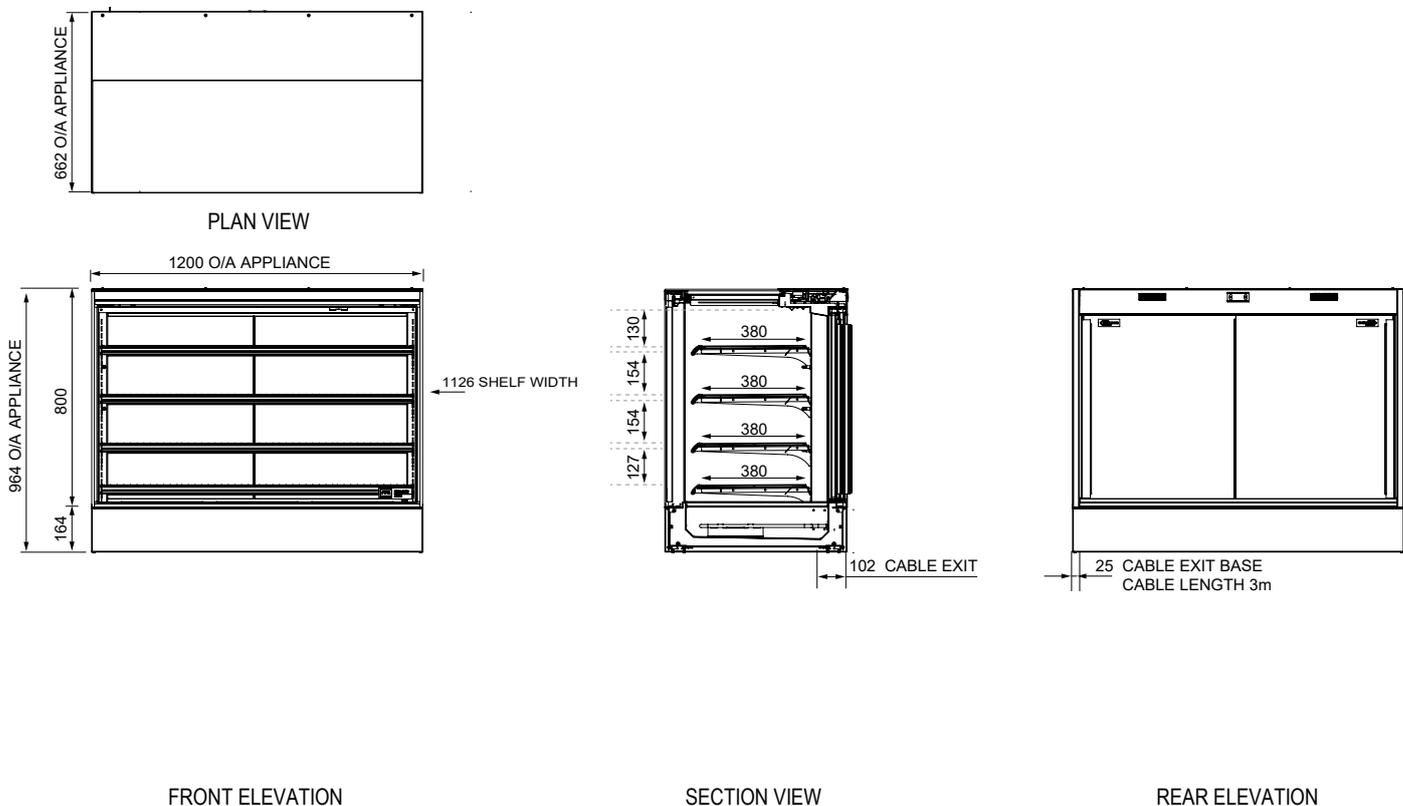

For information on technical data and installation guidelines please contact support@fpgworld.com

In line with our policy to continually develop, improve and support our products, Future Products Group Ltd reserves the right to change specifications and design without notice.

Have a question? Please email us at sales@fpgworld.com or visit www.fpgworld.com for full contact details for your region.

