



FPGWORLD.COM

ENCORE

SERIES 8 OPEN FRONT 1200 SQUARE/FREESTANDING/3 SHELVES REFRIGERATED: R290 VSD

| | |
|---------------|----------------------------|
| RANGE | ENCORE SERIES 8 OPEN FRONT |
| TEMPERATURE | REFRIGERATED |
| MODEL | IN-EC12-R-OF-08-B100 |
| FRONT | SQUARE/OPEN FRONT |
| INSTALLATION | FREESTANDING |
| REFRIGERATION | INTEGRAL, R290 |
| TECHNOLOGY | VARIABLE SPEED DRIVE (VSD) |
| HEIGHT | 1450mm |
| WIDTH | 1200mm |
| DEPTH | 662mm |

| | |
|-------------------------------|----------------------------------|
| CORE PRODUCT TEMPERATURE | +1°C - +3°C |
| ENVIRONMENTAL TEST CONDITIONS | CLIMATE CLASS 3 25°C / 60% RH |
| CABINET CLASSIFICATION | 3M0 |

ENERGY EFFICIENCY

| | |
|---|--|
| <p>NZ & AU</p>  <p>4 ENERGY RATING</p> <p>For Star Rating, please visit reg.energyrating.gov.au/comparator</p> | <p>EU</p> <p>For EPREL Rating, please visit:</p>  |
|---|--|

FEATURES

-  **High energy efficiency: 0.80 kWh per hour (average)**
-  **Maintains an average of +1°C - +3°C core product temperature at Climate Class 3: 25°C/60%RH**
- Smart display with double-glazed glass finished with a black trim

Open Front Refrigerated Display

-  Three height-adjustable stainless steel shelves and base are full cabinet width to support maximum display capacity
-  50,000 hour LED lighting system at 1500 lumens per metre in cabinet top and to each shelf
- Unique front ticket strip holders 30mm on shelves and base, and to the rear of shelves

Operational Excellence

-  Sliding doors (staff side) and open front (customer side)
-  Constructed from stainless and mild steel with fully double-glazed, low-E coated, toughened safety glass for maximum energy efficiency, climate control and durability
-  Variable speed drive inverter compressor and electronic controller ensure the cabinet is operating as efficiently as possible
-  Configured with a pre-filter - with regular cleaning by operations staff the life of the cabinet can be extended
- Auto condensate removal (ACR)
- FPG Freeflow air ventilation at rear eliminates the need for front ventilation panels
- Fitted with adjustable 150mm legs (+30mm adjustment)



Showing : Encore Series 8 Open Front refrigerated 1200mm square freestanding with integral refrigeration

OPTIONS & ACCESSORIES

Contact a [FPG Sales Representative](#) for our full range, including:

- Shelf trays: glass or mild steel. Powdercoat colour and woodprint options available for steel.
- Branded decals
- Chassis & shelf ticket strips: powdercoat colour
- Forward-facing controls
- Sides: mirror effect
- Bumper rail with optional product bin
- Tray race
- Rear Sling Doors that slide and swing
- Pull-out shelves
- Rear deck assemblies
- Toe kick
- Castors or rollers
- Thermal Film
- Night curtain
- Custom joinery solution



Please contact FPG to discuss your requirements for meeting country-specific standards.

FPGWORLD.COM

REFRIGERATION DATA

| MODEL | CORE PRODUCT TEMPERATURE | ENVIRONMENTAL TEST CONDITIONS | REFRIGERATION | REFRIGERANT | A LIMIT | CONDENSATE REMOVAL |
|----------------------|--------------------------|---------------------------------|----------------|-------------|----------------------|--------------------|
| IN-EC12-R-OF-08-B100 | +1°C - +3°C | Climate Class 3 - 25°C / 60% RH | Integral - VSD | R290 | 10.53 m ² | Automatic |

ELECTRICAL DATA

| MODEL | VOLTAGE | PHASE | CURRENT | E24H (kWh) | kWh per hour (average) | IP RATING | MAINS | | LED LIGHTING | | |
|----------------------|-----------|--------|---------|------------|------------------------|-----------|-----------------------|------------------------------|--------------|----------------|---------|
| | | | | | | | CONNECTION | CONNECTION PLUG ¹ | HOURS | LUMENS | COLOUR |
| IN-EC12-R-OF-08-B100 | 220-240 V | Single | 9.3 A | 19.16 | 0.80 | IP 21 | 3 metre, 3 core cable | 10 amp, 3 pin plug | 50,000 | 1500 per metre | Natural |

¹Please advise country to change plug specification.

CAPACITY, ACCESS & CONSTRUCTION

| MODEL | SHELF DISPLAY AREA | LEVELS | ACCESS FRONT | ACCESS REAR | CHASSIS CONSTRUCTION |
|----------------------|---------------------|------------------|--------------|---------------|------------------------------|
| IN-EC12-R-OF-08-B100 | 1.74 m ² | 3 Shelves + Base | Open front | Sliding doors | Stainless 304 and mild steel |


DIMENSIONS

| MODEL | H x W x D mm (Uncrated) | MASS (Uncrated) |
|----------------------|-------------------------|-----------------|
| IN-EC12-R-OF-08-B100 | 1450 x 1200 x 662 | 223.70 kg |

Crated weights and dimensions vary. Please contact us for information on your shipment.

Installation note:

Model cutout dimensions: IN-EC12-R-OF-08-B100 models require 1208 x 668mm benchtop cutout. Joinery height 595mm (see product manual for installation guide). Optional front bumper rail recommended to complement cabinet/joinery finish. Please request a thermal film when installing a refrigerated cabinet next to an adjacent refrigerated, controlled ambient, or ambient cabinet. **UNOBSTRUCTED AIRFLOW MUST BE MAINTAINED TO ENSURE UNIT PERFORMANCE AND MAINTAIN WARRANTY.**

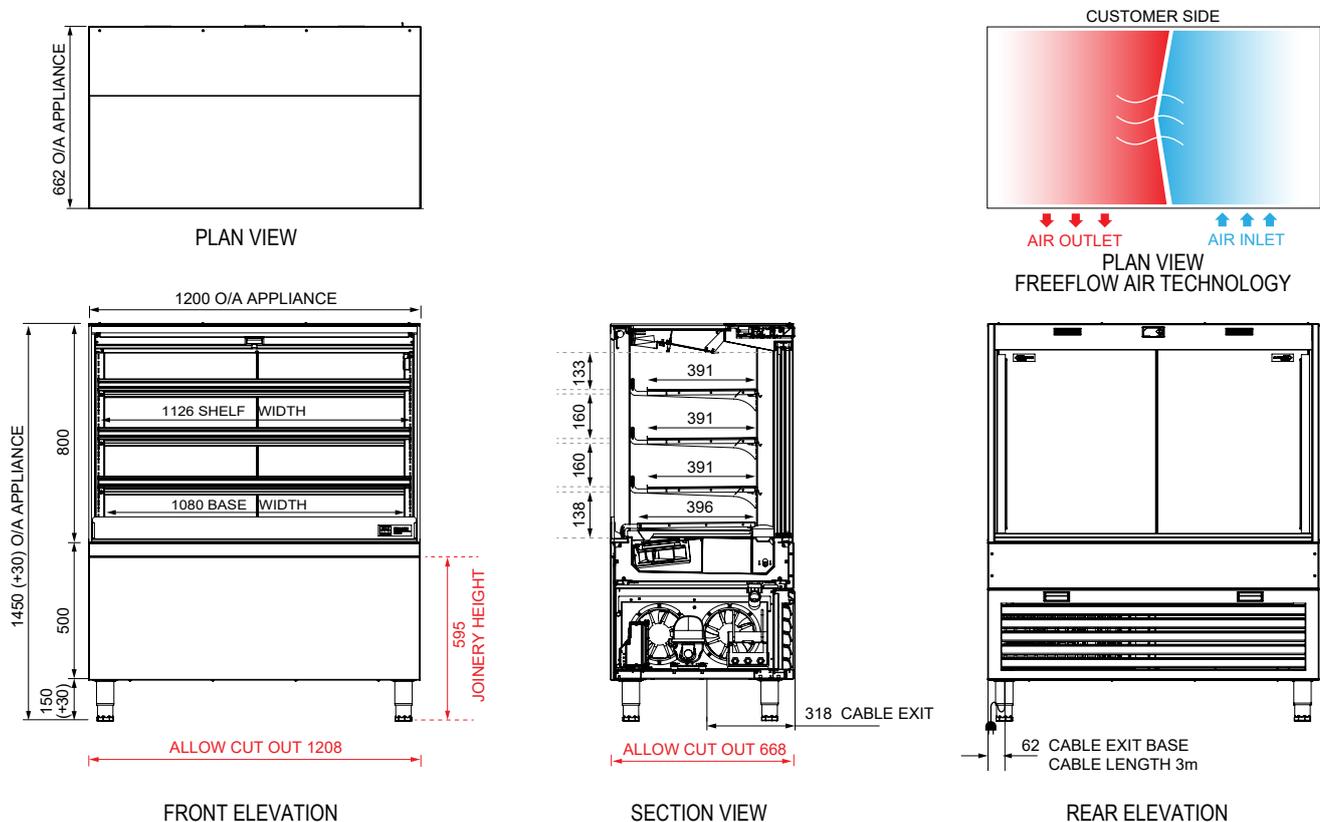

For information on technical data and installation guidelines please contact support@fpgworld.com

In line with our policy to continually develop, improve and support our products, Future Products Group Ltd reserves the right to change specifications and design without notice.

Have a question? Please email us at sales@fpgworld.com or visit www.fpgworld.com for full contact details for your region.

