



FPGWORLD.COM

# ENCORE

## SERIES 8 BAIN MARIE ON-COUNTER 900 HEATED

|              |                            |                          |
|--------------|----------------------------|--------------------------|
| RANGE        | ENCORE SERIES 8 BAIN MARIE |                          |
| TEMPERATURE  | HEATED                     |                          |
| MODEL        | IN-EC09-BM-08-A009         | IN-EC09-BM-08-A010       |
| FRONT        | SQUARE/<br>TILT FRONT      | SQUARE/<br>SLIDING DOORS |
| INSTALLATION | ON-COUNTER                 |                          |
| HEIGHT       | 964mm                      |                          |
| WIDTH        | 900mm                      |                          |
| DEPTH        | 662mm                      |                          |

|                                      |               |
|--------------------------------------|---------------|
| TEMPERATURE RANGE                    | +55°C - +90°C |
| RECOMMENDED CORE PRODUCT TEMPERATURE | +65°C - +80°C |
| ENVIRONMENTAL TEST CONDITIONS        | 22°C / 65% RH |

## FEATURES

- High energy efficiency: 0.66 kWh per hour (average)**
- Cabinet operating temperature range +55°C - +90°C**  
**Recommended core product temperature +65°C - +80°C**

- Smart display with double-glazed glass finished with a black trim

### Tilt Front or Sliding Doors Heated Display

- One tiltable, height-adjustable stainless steel wire rack shelf is full cabinet width to support maximum display capacity
- Unique shelf mounted front ticket strip 30mm together with rear ticket holder
- Shelf fitted with halogen heat lamps, with 3000 hour warm white lighting
- 25,000 hour LED lighting system at 2758 lumens per metre in cabinet top
- Supplied with 2x 1/1 gastronorm dish 65mm deep

### Operational Excellence

- Sliding doors (staff side) and tilt front or sliding doors options (customer side)
- Constructed from stainless and mild steel with fully double-glazed, low-E coated, toughened safety glass for maximum energy efficiency, climate control and durability
- Low wattage density element in base provides even temperature distribution
- Dry operation well only
- Positioned on counter top



Showing : Encore Series 8 Bain Marie heated 900mm square on-counter tilt front

## OPTIONS & ACCESSORIES

Contact a [FPG Sales Representative](#) for our full range, including:

- Shelf trays: Toughened safety glass or mild steel. Colour and woodprint options available for steel.
- Stainless steel product trays
- Stainless steel pie chutes
- GN pans (various sizes)
- GN dividers
- Branded decals
- Shelf ticket strips: powdercoat colour
- Forward-facing controls
- Sides: mirror effect
- Rear Sling Doors that slide and swing
- Custom joinery solution



Please contact FPG to discuss your requirements for meeting country-specific standards.

FPGWORLD.COM

### HEATED DATA

| MODEL              | TEMPERATURE RANGE | RECOMMENDED CORE PRODUCT TEMPERATURE | ENVIRONMENTAL TEST CONDITIONS | HEATING  |
|--------------------|-------------------|--------------------------------------|-------------------------------|--|
| IN-EC09-BM-08-Axxx | +55°C – +90°C     | +65°C – +80°C                        | 22°C / 65% RH                 | Low wattage density element / 2x 100 watt linear halogen |

### ELECTRICAL DATA

| MODEL              | VOLTAGE   | PHASE  | CURRENT | E24H (kWh) | kWh per hour (average) | IP RATING | MAINS                 |                              | LED    | HALOGEN LIGHTING |            |
|--------------------|-----------|--------|---------|------------|------------------------|-----------|-----------------------|------------------------------|--------|------------------|------------|
|                    |           |        |         |            |                        |           | CONNECTION            | CONNECTION PLUG <sup>1</sup> | HOURS  | HOURS            | COLOUR     |
| IN-EC09-BM-08-Axxx | 220-240 V | Single | 8.8 A   | 15.85      | 0.66                   | IP 21     | 3 metre, 3 core cable | 10 amp, 3 pin plug           | 25,000 | 3000             | Warm white |

<sup>1</sup>Please advise country to change plug specification.


### CAPACITY, ACCESS & CONSTRUCTION

| MODEL              | DISPLAY AREA        | LEVELS              | NO. OF 1/1 PANS | ACCESS FRONT  | ACCESS REAR   | CHASSIS CONSTRUCTION         |
|--------------------|---------------------|---------------------|-----------------|---------------|---------------|------------------------------|
| IN-EC09-BM-08-A009 | 0.70 m <sup>2</sup> | 1 Shelf + Base pans | 2               | Tilt front    | Sliding doors | Stainless 304 and mild steel |
| IN-EC09-BM-08-A010 |                     |                     |                 | Sliding doors |               |                              |

### DIMENSIONS

| MODEL              | H x W x D mm (Uncrated) | MASS (Uncrated) |
|--------------------|-------------------------|-----------------|
| IN-EC09-BM-08-A009 | 964 x 900 x 662         | 111 kg          |
| IN-EC09-BM-08-A010 |                         | 111 kg          |

Crated weights and dimensions vary. Please contact us for information on your shipment.

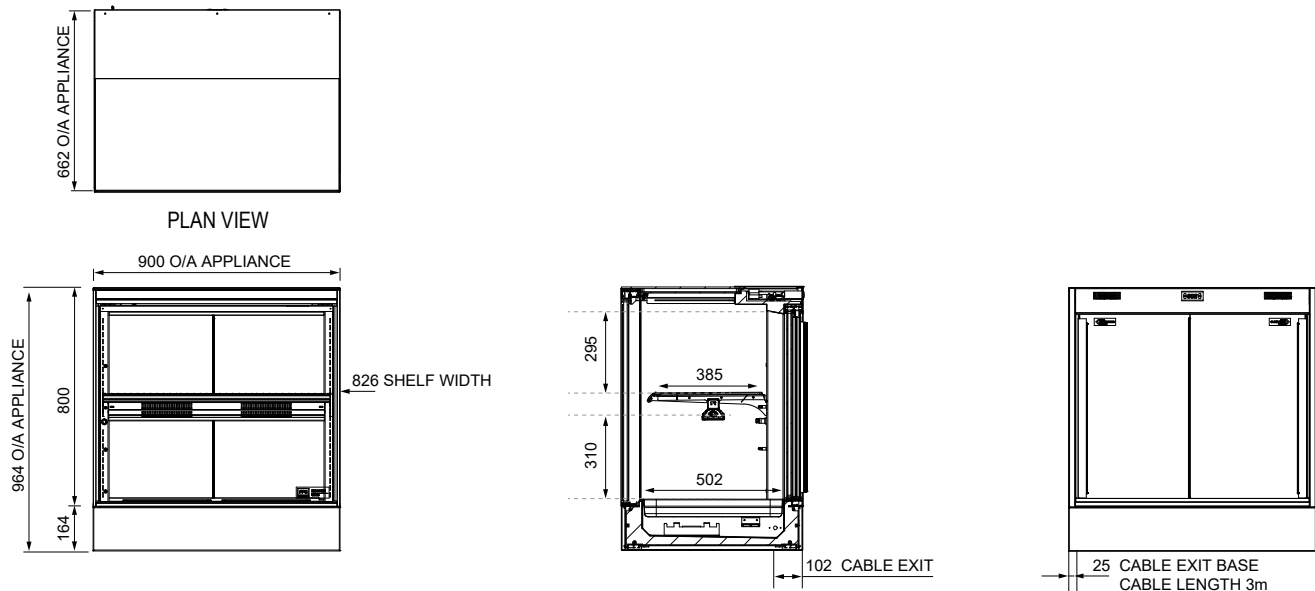

FRONT ELEVATION

SECTION VIEW

REAR ELEVATION

For information on technical data and installation guidelines please contact [support@fpgworld.com](mailto:support@fpgworld.com)

In line with our policy to continually develop, improve and support our products, Future Products Group Ltd reserves the right to change specifications and design without notice.

Have a question? Please email us at [sales@fpgworld.com](mailto:sales@fpgworld.com) or visit [www.fpgworld.com](http://www.fpgworld.com) for full contact details for your region.

