FPGWORLD.COM

# ENCORE

## SERIES 8 OPEN FRONT 600 SQUARE/ON-COUNTER/2 SHELVES REFRIGERATED: R290 **VSD**

| | |
|---|---|
| RANGE | ENCORE SERIES 8 OPEN FRONT |
| TEMPERATURE | REFRIGERATED |
| MODEL | IN-EC06-R-OF-08-B105 |
| FRONT | SQUARE/OPEN FRONT |
| INSTALLATION | ON-COUNTER |
| REFRIGERATION | INTEGRAL, R290 |
| TECHNOLOGY | VARIABLE SPEED DRIVE (VSD) |
| HEIGHT | 1260mm |
| WIDTH | 600mm |
| DEPTH | 662mm |

| | |
|---|---|
| CORE PRODUCT TEMPERATURE | +1˚C – +3˚C |
| ENVIRONMENTAL TEST CONDITIONS | CLIMATE CLASS 3<br>25˚C / 60% RH |
| CABINET CLASSIFICATION | 3M0 |

| ENERGY EFFICIENCY | |
|---|---|
| NZ & AU | EU |
| 5 ENERGY RATING<br>For Star Rating, please visit<br>reg.energyrating.gov.au/comparator | For EPREL Rating, please visit:<br>C (A ↑ G) |

## FEATURES

- **High energy efficiency: 0.33 kWh per hour (average)**
- **Maintains an average of +1˚C – +3˚C core product temperature at Climate Class 3: 25˚C/60% RH**
- Smart display with double-glazed glass finished with a black trim

### Open Front Refrigerated Display

- Two height-adjustable stainless steel shelves and base are full cabinet width to support maximum display capacity
- 50,000 hour LED lighting system at 1500 lumens per metre in cabinet top and to each shelf
- Unique front ticket strip holders 30mm on shelves and base, and to the rear of shelves

### Operational Excellence

- Sliding doors (staff side) and open front (customer side)
- Constructed from stainless and mild steel with fully double-glazed, low-E coated, toughened safety glass for maximum energy efficiency, climate control and durability
- Variable speed drive inverter compressor and electronic controller ensure the cabinet is operating as efficiently as possible
- Configured with a pre-filter - with regular cleaning by operations staff the life of the cabinet can be extended
- Auto condensate removal (ACR)
- FPG Freeflow air ventilation at rear eliminates the need for front ventilation panels
- Designed to be installed into joinery

Showing : Encore Series 8 Open Front refrigerated 600mm square on-counter with integral refrigeration

## OPTIONS & ACCESSORIES

Contact a **FPG Sales Representative** for our full range, including:

- Shelf trays: glass or mild steel. Powdercoat colour and woodprint options available for steel.
- Branded decals
- Chassis & shelf ticket strips: powdercoat colour
- Forward-facing controls
- Sides: mirror effect
- Rear Sling Doors that slide and swing
- Pull-out shelves
- Thermal film
- Night curtain
- Custom joinery solution

Indicates sustainability benefits

ASNZ Standards | FOOD Standards | CE | IEC | MEPS

Please contact FPG to discuss your requirements for meeting country-specific standards.

FPGWORLD.COM

# ENCORE

## SERIES 8 OPEN FRONT 600 SQUARE/ON-COUNTER/2 SHELVES REFRIGERATED: R290 **VSD**

### REFRIGERATION DATA

| MODEL | CORE PRODUCT TEMPERATURE | ENVIRONMENTAL TEST CONDITIONS | REFRIGERATION | REFRIGERANT | A LIMIT | CONDENSATE REMOVAL |
|---|---|---|---|---|---|---|
| IN-EC06-R-OF-08-B105 | +1°C – +3°C | Climate Class 3 – 25°C / 60% RH | Integral - VSD | R290 | N/A | Automatic |

### ELECTRICAL DATA

| MODEL | VOLTAGE | PHASE | CURRENT | E24H (kWh) | kWh per hour (average) | IP RATING | MAINS | | LED LIGHTING | | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | CONNECTION | CONNECTION PLUG[1] | HOURS | LUMENS | COLOUR |
| IN-EC06-R-OF-08-B105 | 220-240 V | Single | 5.4 A | 9.40 | 0.33 | IP 21 | 3 metre, 3 core cable | 10 amp, 3 pin plug | 50,000 | 1500 per metre | Natural |

[1]Please advise country to change plug specification.

### CAPACITY, ACCESS & CONSTRUCTION

| MODEL | SHELF DISPLAY AREA | LEVELS | ACCESS FRONT | ACCESS REAR | CHASSIS CONSTRUCTION |
|---|---|---|---|---|---|
| IN-EC06-R-OF-08-B105 | 0.60 $m^2$ | 2 Shelves + Base | Open front | Sliding doors | Stainless 304 and mild steel |

### DIMENSIONS

| MODEL | H x W x D mm (Uncrated) | MASS (Uncrated) |
|---|---|---|
| IN-EC06-R-OF-08-B105 | 1260 x 600 x 662 | 117 kg |

Crated weights and dimensions vary. Please contact us for information on your shipment.

**Installation note:**

Model cutout dimensions: IN-EC06-R-OF-08-B105 models require 578 x 611mm benchtop cutout. (see product manual for installation guide). Please request a thermal film when installing a refrigerated cabinet next to an adjacent refrigerated, controlled ambient, or ambient cabinet. **UNOBSTRUCTED AIRFLOW MUST BE MAINTAINED TO ENSURE UNIT PERFORMANCE AND MAINTAIN WARRANTY.**




PLAN VIEW




PLAN VIEW
FREEFLOW AIR TECHNOLOGY




FRONT ELEVATION




SECTION VIEW

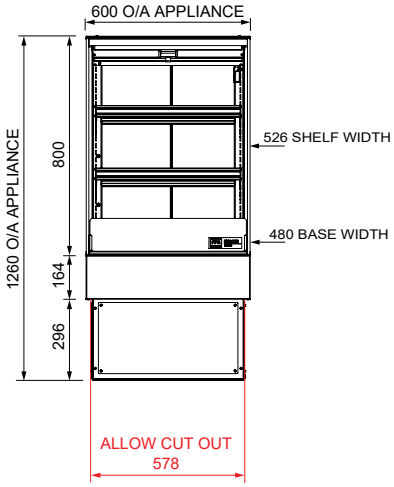


REAR ELEVATION

**For information on technical data and installation guidelines please contact support@fpgworld.com**

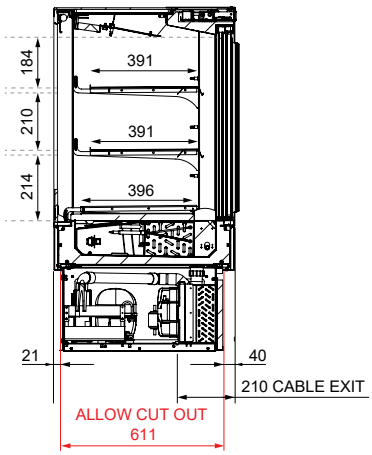In line with our policy to continually develop, improve and support our products, Future Products Group Ltd reserves the right to change specifications and design without notice.

Have a question? Please email us at **sales@fpgworld.com** or visit **www.fpgworld.com** for full contact details for your region.

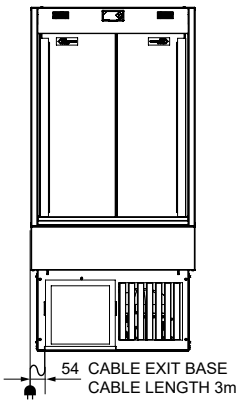Worldwide contact details:

 © 2026 Future Products Group Limited