FPG
FPGWORLD.COM

# ENCORE

## SERIES 8 BAIN MARIE FREESTANDING 1500 HEATED

| | | |
|---|---|---|
| **RANGE** | ENCORE SERIES 8 BAIN MARIE | |
| **TEMPERATURE** | HEATED | |
| **MODEL** | IN-EC15-BM-08-A001 | IN-EC15-BM-08-A002 |
| **FRONT** | SQUARE/ TILT FRONT | SQUARE/ SLIDING DOORS |
| **INSTALLATION** | FREESTANDING | |
| **HEIGHT** | 1450mm | |
| **WIDTH** | 1500mm | |
| **DEPTH** | 662mm | |

| | |
|---|---|
| **TEMPERATURE RANGE** | +55˚C – +80˚C |
| **RECOMMENDED CORE PRODUCT TEMPERATURE** | +65˚C – +80˚C |
| **ENVIRONMENTAL TEST CONDITIONS** | 22˚C / 65% RH |

## FEATURES

- **High energy efficiency: 1.09 kWh per hour (average)**
- **Cabinet operating temperature range +55˚C – +80˚C Recommended core product temperature +65˚C – +80˚C**
- Smart display with double-glazed glass finished with a black trim

### Tilt Front or Sliding Doors Heated Display

- One tiltable, height-adjustable stainless steel wire rack shelf is full cabinet width to support maximum display capacity
- Unique shelf mounted front ticket strip 30mm together with rear ticket holder
- Shelf fitted with halogen heat lamps, with 3000 hour warm white lighting
- 25,000 hour LED lighting system at 2758 lumens per metre in cabinet top
- Supplied with 4x 1/1 gastronorm dish 65mm deep

### Operational Excellence

- Sliding doors (staff side) and tilt front or sliding doors options (customer side)
- Constructed from stainless and mild steel with fully double-glazed, low-E coated, toughened safety glass for maximum energy efficiency, climate control and durability
- Low wattage density element in base provides even temperature distribution
- Dry operation well only
- Fitted with adjustable 150mm legs (+30mm adjustment)

Showing : Encore Series 8 Bain Marie heated 1500mm square freestanding tilt front

## OPTIONS & ACCESSORIES

Contact a **FPG Sales Representative** for our full range, including:

- Shelf trays: Toughened safety glass or mild steel. Colour and woodprint options available for steel.
- Stainless steel product trays
- Stainless steel pie chutes
- GN pans (various sizes)
- GN dividers
- Branded decals
- Shelf ticket strips: powdercoat colour
- Forward-facing controls
- Sides: mirror effect
- Tray race
- Bumper rail with optional product bin
- Rear Sling Doors that slide and swing
- Rear deck assemblies
- Rear ambient drawer with dividers
- Toe kick
- Castors or rollers
- Custom joinery solution

Indicates sustainability benefits

ASNZ Standards FOOD Standards CE IEC

Please contact FPG to discuss your requirements for meeting country-specific standards.

FPG

FPGWORLD.COM

# ENCORE

## SERIES 8 BAIN MARIE FREESTANDING 1500 HEATED

### HEATED DATA

| MODEL | TEMPERATURE RANGE | RECOMMENDED CORE PRODUCT TEMPERATURE | ENVIRONMENTAL TEST CONDITIONS | HEATING |
|---|---|---|---|---|
| IN-EC15-BM-08-Axxx | +55˚C – +80˚C | +65˚C – +80˚C | 22˚C / 65% RH | Low wattage density element / 4x 100 watt linear halogen |

### ELECTRICAL DATA

| MODEL | VOLTAGE | PHASE | CURRENT | E24H (kWh) | kWh per hour (average) | IP RATING | MAINS | | LED | HALOGEN LIGHTING | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | CONNECTION | CONNECTION PLUG[1] | HOURS | HOURS | COLOUR |
| IN-EC09-BM-08-Axxx | 220-240 V | Single | 14.39 A | 26.12 | 1.09 | IP 21 | 3 metre, 3 core cable | 15 amp, 3 pin plug | 25,000 | 3000 | Warm white |

[1]Please advise country to change plug specification.

### CAPACITY, ACCESS & CONSTRUCTION

| MODEL | DISPLAY AREA | LEVELS | NO. OF 1/1 PANS | ACCESS FRONT | ACCESS REAR | CHASSIS CONSTRUCTION |
|---|---|---|---|---|---|---|
| IN-EC15-BM-08-A001 | 1.24 m² | 1 Shelf + Base pans | 4 | Tilt front | Sliding doors | Stainless 304 and mild steel |
| IN-EC15-BM-08-A002 | | | | Sliding doors | | |

### DIMENSIONS

| MODEL | H x W x D mm (Uncrated) | MASS (Uncrated) |
|---|---|---|
| IN-EC15-BM-08-A001 | 1450 x 1500 x 662 | 207 kg |
| IN-EC15-BM-08-A002 | | 207 kg |

Crated weights and dimensions vary. Please contact us for information on your shipment.

**Installation note:**

Model cutout dimensions: IN-EC15-BM-08-A001 & A002 models require 1508 x 668mm benchtop cutout. Joinery height 595mm (see product manual for installation guide).
Optional front bumper rail recommended to complement cabinet/joinery finish.




PLAN VIEW




FRONT ELEVATION

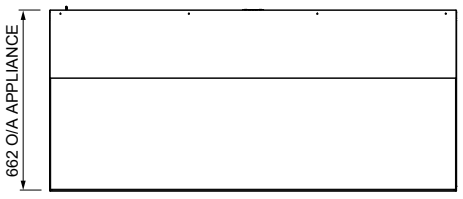


SECTION VIEW

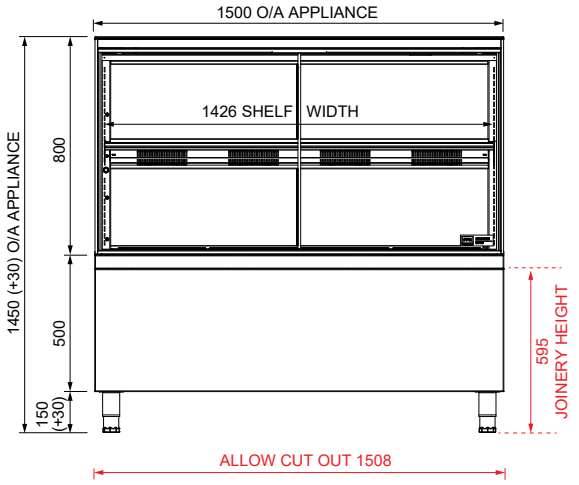


REAR ELEVATION

**For information on technical data and installation guidelines please contact support@fpgworld.com**

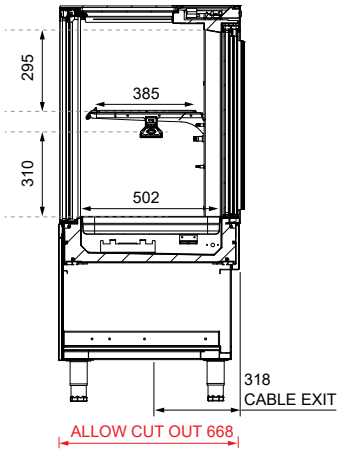In line with our policy to continually develop, improve and support our products, Future Products Group Ltd reserves the right to change specifications and design without notice.

Have a question? Please email us at **sales@fpgworld.com** or visit **www.fpgworld.com** for full contact details for your region.

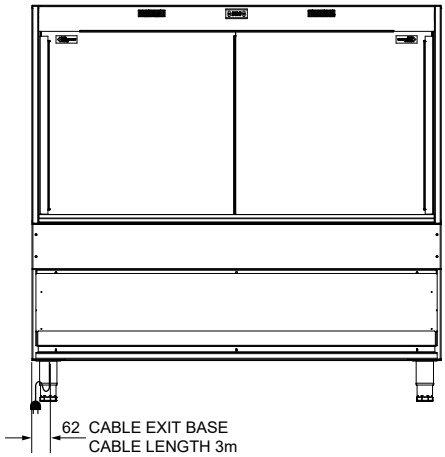Worldwide contact details:

 © 2026 Future Products Group Limited