



**VISAIR - OPEN FRONT HEATED 600mm TALL CABINET, WITH THREE SHELVES**

**MODELS**

- IN-VH06-A004 | Visair open front heated 600mm tall cabinet, with three shelves

**OPTIONS** [F=Factory Fitted]

- Buffer rails (F)
- Roller castors (F)
- Custom colour or branding (F)

**ACCESSORIES** [A=Accessory]

- Magazine racks (A)

**OVERVIEW**

The Visair heated open front merchandiser has been created for busy supermarkets, C-stores and food service outlets that require high capacity heated products displayed at their best. Have peace of mind knowing that your food is consistently safeguarded at core temperature with product freshness and look ensured using new I Wave technology (gentle infrared heating). The infrared technology means lowest possible operation costs and double the presentation time of your heated product...guaranteed.


**FEATURES**

- High energy efficiency - 1.1 kWh per hour average
- Low wattage infrared elements for even temperature distribution
- Double glazed side panels for maximum insulation
- Three shelves and base to give four display levels
- Designed to be free standing
- Electronic controller to help maintain high efficiency
- LED light in cabinet top - and additional LED lighting to each shelf. LED's have 25,000 hour life span



SHOWING : VISAIR OPEN FRONT HEATED 600mm TALL CABINET, WITH THREE SHELVES

**KEY SELLING FEATURES**

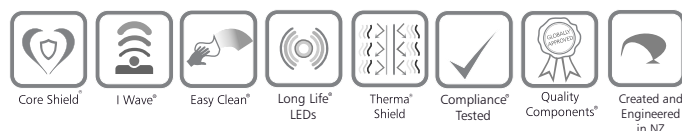

IN-VH06-A004	ENVIRONMENTAL TEST CONDITIONS	22°C / 65% RH	TEMPERATURE RANGE	+30°C-+85°C
--------------	-------------------------------	---------------	-------------------	-------------

Designed to meet and exceed the following compliances and approvals : NSF, EN 55014, EN55014-1, EN 55014-2, EN 61000, EN 61000-3-2, EN 61000-3-3, IEC 60335, IEC 60335-1, IEC 60335-2-49.



VIEW ONLINE AT [FPGWORLD.COM](http://FPGWORLD.COM)



## VISAIR - OPEN FRONT HEATED 600mm TALL CABINET, WITH THREE SHELVES

### SPECIFICATIONS

#### Heated Data

	ENVIRONMENTAL TEST CONDITIONS	CORE PRODUCT - TEMP RANGE	HEATING
IN-VH06-A004	22°C / 65% RH	+30°C - +85°C	Low wattage infrared elements

#### Electrical Data

	VOLTAGE	PHASE	CURRENT	kWh per hour [average]	MAINS CONNECTION	MAINS CONNECTION PLUG	IP RATING	LED LIGHTING
IN-VH06-A004	220-240 V	Single	7.5 A	<b>1.1 kWh per hour</b>	3 metre 3 core cable	10 amp, 3 pin plug	IP 22	25,000 hr LED

#### Display

	DISPLAY AREA	NO. OF SHELVES	ACCESS - FRONT	ACCESS - REAR	DOOR OPENINGS	CONSTRUCTION
IN-VH06-A004	0.95m <sup>2</sup>	3 + Base	Open front	N/A	N/A	304 Stainless Steel

#### Dimensions [Uncrated and Crated]


	H x W x D mm [Uncrated]	MASS [Uncrated]	H x W x D mm [Crated]	MASS [Crated]	CUBIC VOLUME [Crated]
IN-VH06-A004	1900 x 659 x 736	135 kg	935 x 1955 x 745	250 kg	1.36m <sup>3</sup>

#### Installation note:


Unobstructed airflow must be maintained to ensure unit performance and maintain warranty

In line with policy to continually develop and improve it's products, Future Products Group reserves the right to change specifications and design without notice.


For more information and technical data, including installation documents refer to the website - [www.fpgworld.com](http://www.fpgworld.com)




PLAN VIEW

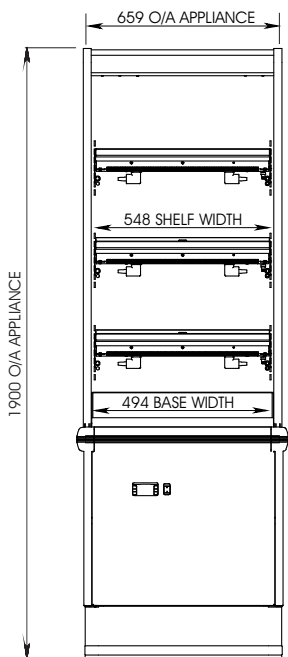

FRONT ELEVATION

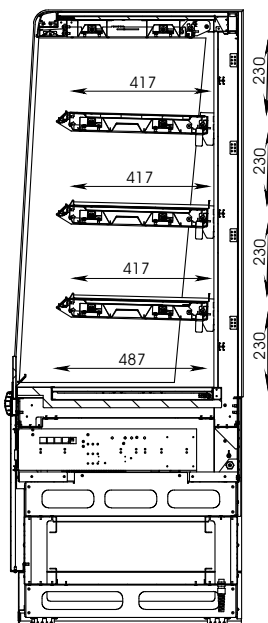

SECTION VIEW

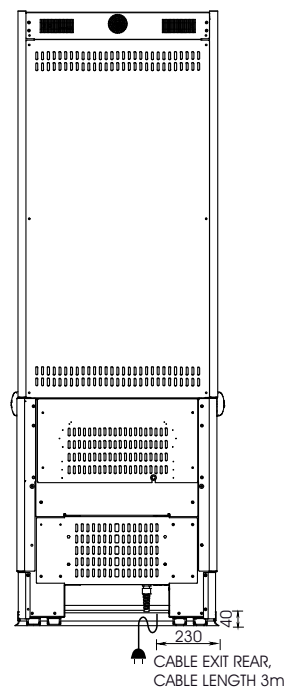

REAR ELEVATION