


## INLINE SERIES - 4000 CONTROLLED AMBIENT 1500mm SQUARE FREESTANDING



### MODELS

- IN-4CA15-SQ-FF-FS-I | 4000 Series controlled ambient 1500mm square freestanding, with fixed front glass, with integral condensing unit
- IN-4CA15-SQ-SD-FS-I | 4000 Series controlled ambient 1500mm square freestanding, with sliding glass doors, with integral condensing unit
- IN-4CA15-SQ-FF-FS-R | 4000 Series controlled ambient 1500mm square freestanding, with fixed front glass, for remote condensing unit
- IN-4CA15-SQ-SD-FS-R | 4000 Series controlled ambient 1500mm square freestanding, with sliding glass doors, for remote condensing unit

### OPTIONS [F=Factory Fitted]

- Lockable castors (F)
- Rear door mirror application (F)
- End glass mirror application (F)
- EPR valve or Solenoid valve for remote connection (F)

### ACCESSORIES [A=Accessory]

- Toughened glass shelves (A)
- Angled base shelf (A)
- Thermal divider panels (A)
- Rear deck assembly with no bag and tong holder (A)
- Rear deck assembly with 1x bag and 2 x tong holders (A)

### OVERVIEW

Created for the busy food service business wanting to display a large quantity or wide variety of food. The 4000 Series cabinets are proven for 85 door openings an hour while still maintaining core product temperatures. The lighting and merchandising features are designed to create impact and increase sales. This low energy consumption unit, keeps product fresher for longer. The cabinets come ready to plug in making installation quick and easy. The Inline 4000 construction allows for smart counter integration options of either a recessed, countertop mounting or freestanding display.


### FEATURES

- High energy efficiency - 0.7 kWh per hour average
- Maintains +15°C - +18°C core product temperature with up to 85 door openings per hour
- Sliding doors (staff side) and fixed front or sliding doors options (customer side)
- Three adjustable shelves and base for product display
- 50,000 hour LED lighting in cabinet top and shelves
- Remote display supplied with standard R134A TX Valve
- High internal humidity maintains and extends product quality
- Fully double glazed for energy efficiency
- Adjustable 150mm feet (+30mm adjustment)
- Fascia and base panel extrusions can be fitted with clip-in decorative inserts
- Unique shelf mounted ticket strip front and rear
- Freeflow air technology (no front counter vents required)
- Also available as a in counter or on counter models



SHOWING : 4000 SERIES CONTROLLED AMBIENT 1500mm SQUARE FREESTANDING, WITH FIXED FRONT, WITH INTEGRAL CONDENSING UNIT

### KEY SELLING FEATURES



IN-4CA15-SQ-FF-FS-I	CLIMATE CLASS	3 - max 25°C / 60% RH	TEMPERATURE RANGE	+15°C - +18°C
IN-4CA15-SQ-SD-FS-I				
IN-4CA15-SQ-FF-FS-R				
IN-4CA15-SQ-SD-FS-R				

Designed to meet and exceed the following compliances and approvals : NSF, EN 55014, EN55014-1, EN 55014-2, EN 61000, EN 61000-3-2, EN 61000-3-3, IEC 60335, IEC 60335-1, IEC 60335-2-89.



VIEW ONLINE AT [FPGWORLD.COM](http://FPGWORLD.COM)



## INLINE SERIES - 4000 CONTROLLED AMBIENT 1500mm SQUARE FREESTANDING

### SPECIFICATIONS

#### Refrigeration Data

	CLIMATE CLASS	CORE PRODUCT TEMP RANGE	REFRIGERANT	REFRIGERANT CHARGE	REMOTE CONNECTION	CONDENSATE REMOVAL
IN-4CA15-SQ-FF-FS-I	3 - max 25°C / 60% RH	+15°C - +18°C	R134A	See serial label	N/A	Manual/Auto*
IN-4CA15-SQ-SD-FS-I	3 - max 25°C / 60% RH	+15°C - +18°C	R134A	See serial label	N/A	Manual/Auto*
IN-4CA15-SQ-FF-FS-R	3 - max 25°C / 60% RH	+15°C - +18°C	R134A (unless otherwise specified)	N/A	TX valve, EPR valve*, Solenoid valve*	N/A
IN-4CA15-SQ-SD-FS-R	3 - max 25°C / 60% RH	+15°C - +18°C	R134A (unless otherwise specified)	N/A	TX valve, EPR valve*, Solenoid valve*	N/A

\*Option or Accessory

Please note: Remote condensing unit information; 900W @ -5°C SST & 35°C condensing

Please note: Remote condensing unit not supplied

#### Electrical Data

	VOLTAGE	PHASE	CURRENT	kWh per hour [average]	MAINS CONNECTION	MAINS CONNECTION PLUG	IP RATING	ACR POWER*	ACR CURRENT*	LED LIGHTING
IN-4CA15-SQ-FF-FS-I	220-240 V	Single	4.3 A	0.7 kWh per hour	3 metre 3 core cable	10 amp, 3 pin plug	IP 22	250 W	1.0 A	50,000 hr LED
IN-4CA15-SQ-SD-FS-I	220-240 V	Single	4.3 A	0.7 kWh per hour	3 metre 3 core cable	10 amp, 3 pin plug	IP 22	250 W	1.0 A	50,000 hr LED
IN-4CA15-SQ-FF-FS-R	220-240 V	Single	1.0 A	-	3 metre 3 core cable	10 amp, 3 pin plug	IP 22	N/A	N/A	50,000 hr LED
IN-4CA15-SQ-SD-FS-R	220-240 V	Single	1.0 A	-	3 metre 3 core cable	10 amp, 3 pin plug	IP 22	N/A	N/A	50,000 hr LED

\*Option or Accessory

Auto Condensate Removal = ACR

#### Display

	DISPLAY AREA	NO. OF SHELVES	ACCESS - FRONT	ACCESS - REAR	DOOR OPENINGS @ +15°C - +18°C	CONSTRUCTION
IN-4CA15-SQ-FF-FS-I	2.5m <sup>2</sup>	3 + Base	Fixed front	Sliding doors	85 openings per hour	304 Stainless Steel
IN-4CA15-SQ-SD-FS-I	2.5m <sup>2</sup>	3 + Base	Sliding doors	Sliding doors	85 openings per hour	304 Stainless Steel
IN-4CA15-SQ-FF-FS-R	2.5m <sup>2</sup>	3 + Base	Fixed front	Sliding doors	85 openings per hour	304 Stainless Steel
IN-4CA15-SQ-SD-FS-R	2.5m <sup>2</sup>	3 + Base	Sliding doors	Sliding doors	85 openings per hour	304 Stainless Steel

#### Dimensions [Uncrated and Crated]


	H x W x D mm [Uncrated]	MASS [Uncrated]	H x W x D mm [Crated]	MASS [Crated]	CUBIC VOLUME [Crated]
IN-4CA15-SQ-FF-FS-I	1405 x 1503 x 778	275 kg	1595 x 1590 x 940	370 kg	2.38m <sup>3</sup>
IN-4CA15-SQ-SD-FS-I	1405 x 1503 x 778	275 kg	1595 x 1590 x 940	370 kg	2.38m <sup>3</sup>
IN-4CA15-SQ-FF-FS-R	1405 x 1503 x 778	250 kg	1595 x 1590 x 940	345 kg	2.38m <sup>3</sup>
IN-4CA15-SQ-SD-FS-R	1405 x 1503 x 778	250 kg	1595 x 1590 x 940	345 kg	2.38m <sup>3</sup>

#### Installation note:


Unobstructed airflow must be maintained to ensure unit performance and maintain warranty

In line with policy to continually develop and improve its products, Future Products Group reserves the right to change specifications and design without notice.


For more information and technical data, including installation documents, please refer to the website - [www.fpgworld.com](http://www.fpgworld.com)

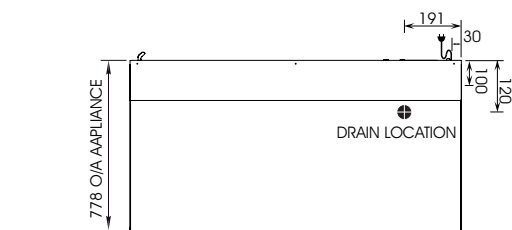


PLAN VIEW




PLAN VIEW  
FREEFLOW AIR TECHNOLOGY

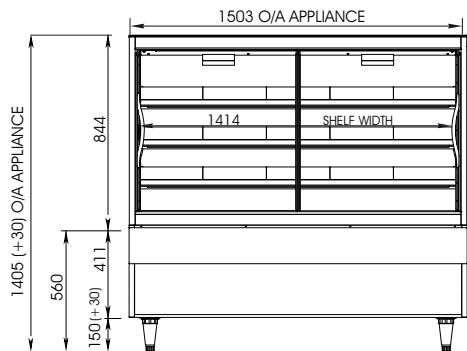

FRONT ELEVATION



SECTION VIEW

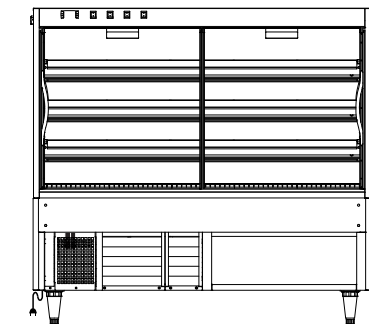

REAR ELEVATION