



FPGWORLD.COM

# visair

## UPRIGHT 2000 OPEN FRONT REFRIGERATED: R449A/R290

RANGE	VISAIR UPRIGHT	
TEMPERATURE	REFRIGERATED	
MODEL	IN-VA20-AXXX	IN-VA20-BXXX
FRONT	OPEN FRONT	
INSTALLATION	FREESTANDING/ROLLERS	
REFRIGERATION	INTEGRAL, R449A	INTEGRAL, R290 <sup>1</sup>
HEIGHT	1480mm	
WIDTH	2109mm	
DEPTH	830mm	

<sup>1</sup>Subject to the availability of R290 horizontal scroll compressors.

CORE PRODUCT TEMPERATURE	+2°C – +4°C
ENVIRONMENTAL TEST CONDITIONS	CLIMATE CLASS 3 25°C / 60% RH
CABINET CLASSIFICATION	3M1

ENERGY EFFICIENCY
NZ & AU (R449A)
The Visair Upright Refrigerated 2000 (IN-VA20) is comprised of 2x Visair Upright Refrigerated 1000 (IN-VA10), each with its own independently powered refrigeration system.
For the Star Rating, please search for 'IN-VA10' at <a href="http://reg.energyrating.gov.au/comparator">reg.energyrating.gov.au/comparator</a>

## FEATURES

**High energy efficiency: 2.7 kWh per hour (average)**

**Maintains an average of +2°C - +4°C core product temperature at Climate Class 3 25°C/60%RH**

- Robust open front display, powdercoated satin black for a sleek finish

### Open Front Refrigerated Display

- Four full-width display levels: six shelves and base are powdercoated black with textured stipple finish and full cabinet width to support maximum display capacity
- Pluggable 50,000 hour LED lighting system at 1500 lumens per metre in cabinet top and to each shelf
- Base ticket strip: 25mm

### Operational Excellence

- Constructed from mild steel - powdercoated satin black with fully double-glazed, toughened safety glass for maximum energy efficiency, climate control and durability
- Two energy efficient scroll compressors with active defrost technology installed to service each half of the cabinet
- High capacity EC (electronically controlled) energy saving and low noise fans
- Electronic controller ensures the cabinet is operating as efficiently as possible
- Cabinet features an 'air curtain' to retain cold air within cabinet
- Configured with a pre-filter - with regular cleaning by operations staff the life of the cabinet can be extended
- Auto Condensate Removal (ACR)
- Fitted with protective black buffer rail at base front and sides
- Fitted with unidirectional rollers and adjustable stabilisers



Showing : Visair Upright refrigerated 2000mm freestanding open front with three full-width shelf levels and base

## OPTIONS & ACCESSORIES

Contact a [FPG Sales Representative](#) for our full range, including:

- Full-width shelf options:
  - Two or four
- Split shelving options:
  - Two, three or four split shelves on each side
- Shelf: Colour and woodprint options available
- Shelf ticket strip: 30mm
- Custom colour
- Branded decals
- Lockable castors
- Gravity feed system
- Night curtain
- Custom joinery solution



Please contact FPG to discuss your requirements for meeting country-specific standards.

FPGWORLD.COM



FPGWORLD.COM

# visair

UPRIGHT 2000  
OPEN FRONT  
REFRIGERATED: R449A/R290

## REFRIGERATION DATA

MODEL	CORE PRODUCT TEMPERATURE	ENVIRONMENTAL TEST CONDITIONS	REFRIGERATION	REFRIGERANT	CONDENSATE REMOVAL
IN-VA20-AXXX	+2°C - +4°C	Climate Class 3 - 25°C / 60% RH	Integral	R449A	ACR
IN-VA20-BXXX				R290 <sup>1</sup>	

<sup>1</sup>Subject to the availability of R290 horizontal scroll compressors.

## ELECTRICAL DATA

MODEL	VOLTAGE	PHASE	CURRENT	E24H (kWh)	kWh per hour (average)	IP RATING	MAINS		LED LIGHTING		
							CONNECTION	CONNECTION PLUG <sup>2</sup>	HOURS	LUMENS	COLOUR
IN-VA20-AXXX	220-240 V	Single	2 x 8.7 A	64.8	2.7	IP X0	2 x 3 metre 3 core cable	2 x 10 amp 3 pin plug	50,000	1500 per metre	Natural
IN-VA20-BXXX			2 x 8.4 A	51.36	2.14						

<sup>2</sup>Please advise country to change plug specification.

## CAPACITY, ACCESS & CONSTRUCTION

MODEL	DISPLAY AREA	LEVELS	ACCESS FRONT	ACCESS REAR	CHASSIS CONSTRUCTION
IN-VA20-XXXX	2.8 m <sup>2</sup>	3 Shelves + Base	Open front	N/A	Stainless 304 and mild steel


## DIMENSIONS

MODEL	H x W x D mm (Uncrated)	MASS (Uncrated)
IN-VA20-XXXX	1480 x 2109 x 830	460 kg

Crated weights and dimensions vary. Please contact us for information on your shipment.

**Installation note:** Designed to be installed as a stand alone unit.

UNOBSTRUCTED AIRFLOW MUST BE MAINTAINED TO ENSURE UNIT PERFORMANCE AND TO MAINTAIN WARRANTY. ALLOW NO LESS THAN 200mm CLEARANCE ABOVE CABINET FOR AIRFLOW. CABINETS WITH R290 REFRIGERANT REQUIRE A MINIMUM ROOM SIZE OF ~18m<sup>2</sup> AT CEILING HEIGHT OF 2.2m

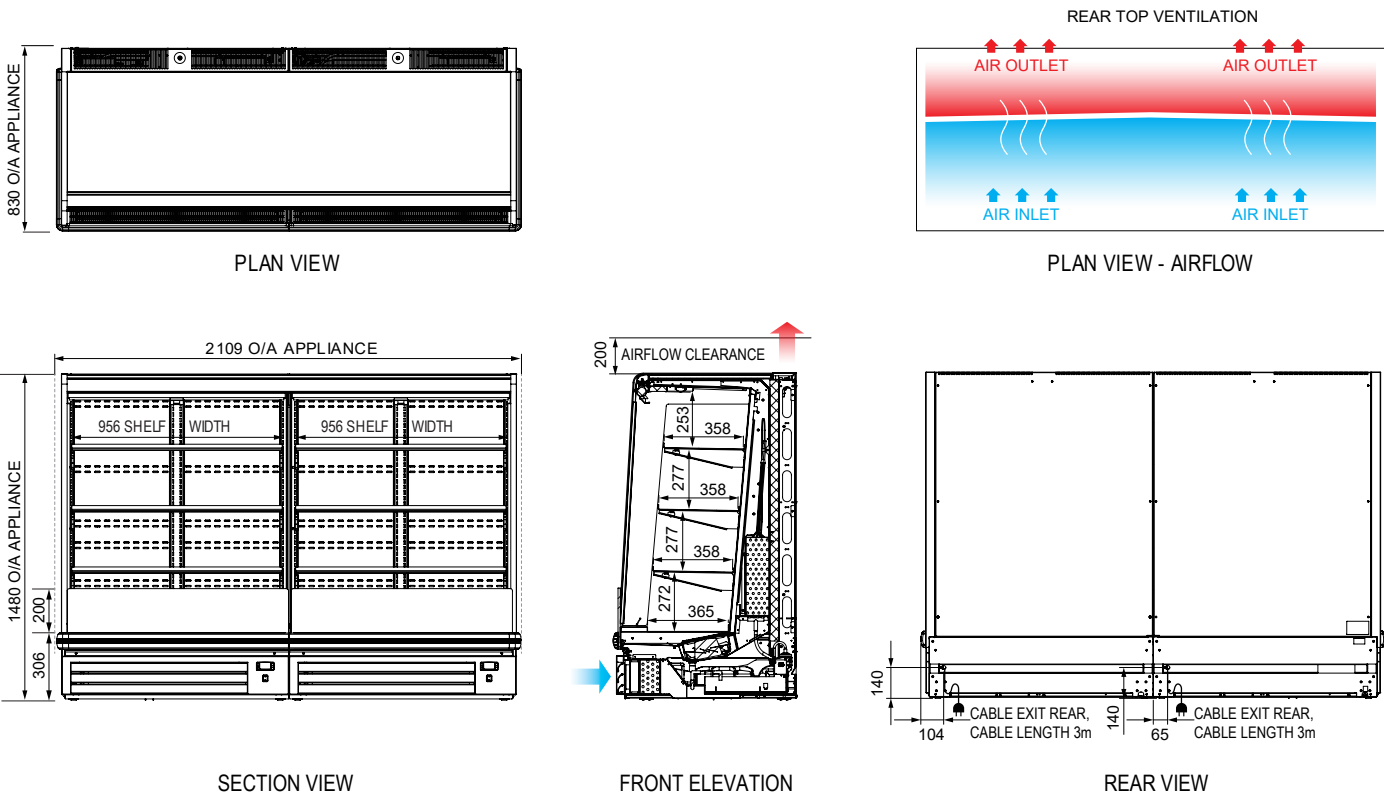

More information including technical data and installation guidelines is available from the Product Manual published on our website.

In line with our policy to continually develop, improve and support our products, Future Products Group Ltd reserves the right to change specifications and design without notice.

Have a question? Please email us at [sales@fpgworld.com](mailto:sales@fpgworld.com) or visit [www.fpgworld.com](http://www.fpgworld.com) for full contact details for your region.

