



FPGWORLD.COM

INLINE

GN SERIES 3x 1/1 PANS MOBILE REFRIGERATED

RANGE	INLINE GN SERIES
TEMPERATURE	REFRIGERATED
MODEL	IN-GNC03-M
INSTALLATION	MOBILE
REFRIGERATION	INTEGRAL, R513A
HEIGHT	942mm (without gantry)
	1300mm (with flat self-serve gantry)
WIDTH	1323mm
DEPTH	974mm

CORE PRODUCT TEMPERATURE	+2°C - +4°C
ENVIRONMENTAL TEST CONDITIONS	CLIMATE CLASS 3 25°C / 60% RH
CABINET CLASSIFICATION	3M1

FEATURES

- High energy efficiency: 0.80 kWh per hour (average)
- Maintains an average of +2°C - +4°C core product temperature at Climate Class 3 25°C/60%RH

Mobile Refrigerated Display

- Timeless stainless steel chassis fitted with heavy duty castors to support mobility
- Three levels allowing deck trays to be positioned from 150mm deep below the air curtain
- Merchandise with GN pans (accessories) or use your own displayware
- Reversible deck pans provide ice display option

Operational Excellence

- Engineering excellence and heavy duty build quality provide years of trouble free operation
- Double-skin insulated well
- Easy to clean - cabinets can be cleaned and serviced with many parts operator removable for simple safe access
- Automatic intelligent active defrost cycle
- Manual condensate removal
- With regular preventative maintenance by a technician, the life of the cabinet can be extended
- Onboard control panel: Temperature, Power, Refrigeration
- Fully integral refrigeration system

Gantry (Option)

- Constructed from toughened safety glass and fitted with 50,000 hour LED lighting at 1500 lumens per metre



Showing : Inline GN Series Mobile refrigerated 3x 1/1 pans, fitted with flat self-serve gantry (option) and GN pans (accessories)

OPTIONS & ACCESSORIES

Contact a [FPG Sales Representative](#) for our full range, including:

- Gantries: Flat self-serve, curved self-serve, flat serve-over
- GN pans (various sizes)
- GN dividers
- Auto Condensate Removal (ACR)
- Tray race



Indicates sustainability benefits



Please contact FPG to discuss your requirements for meeting country-specific standards.

FPGWORLD.COM

REFRIGERATION DATA

MODEL	CORE PRODUCT TEMPERATURE	ENVIRONMENTAL TEST CONDITIONS	REFRIGERATION	REFRIGERANT	CONDENSATE REMOVAL
IN-GNC03-M	+2°C – +4°C	Climate Class 3 - 25°C / 60% RH	Integral	R513A	Manual/ACR ¹

¹Option.

ELECTRICAL DATA

MODEL	VOLTAGE	PHASE	CURRENT	E24H (kWh)	kWh per hour (average)	IP RATING	MAINS		LED LIGHTING		
							CONNECTION	CONNECTION PLUG ²	HOURS	LUMENS	COLOUR
IN-GNC03-M	220-240 V	Single	2.5 A	19.2	0.80	IP 22	3 metre, 3 core cable	10 amp, 3 pin plug	N/A	N/A	N/A
GANTRY (Option)	220-240 V	Single	0.2 A	1.2	0.05	IP 22	Wired to GN	N/A	50,000	1500 per metre	Natural
ACR (Option)	N/A	N/A	4.0 A	24.0	1.00	N/A	N/A	N/A	N/A	N/A	N/A

²Please advise country to change plug specification.

CAPACITY, ACCESS & CONSTRUCTION

MODEL	DISPLAY AREA (DECK TRAYS)	NO. OF 1/1 PANS ³	DECK TRAY LEVELS	DRAIN DIAMETER	CHASSIS CONSTRUCTION
IN-GNC03-M	0.53 m ²	Accommodates 3	3 levels	19mm	Stainless 304 and mild steel

³Accessory.

DIMENSIONS WITHOUT GANTRY


MODEL	H x W x D mm (Uncrated)	MASS (Uncrated)
IN-GNC03-M	942 x 1323 x 974	- kg

Crated weights and dimensions vary. Please contact us for information on your shipment.

Installation note:

UNOBSTRUCTED AIRFLOW MUST BE MAINTAINED TO ENSURE UNIT PERFORMANCE AND MAINTAIN WARRANTY.

Elevations show cabinet fitted with flat self-serve gantry (option) and GN pans (accessories), and include other gantry options available.

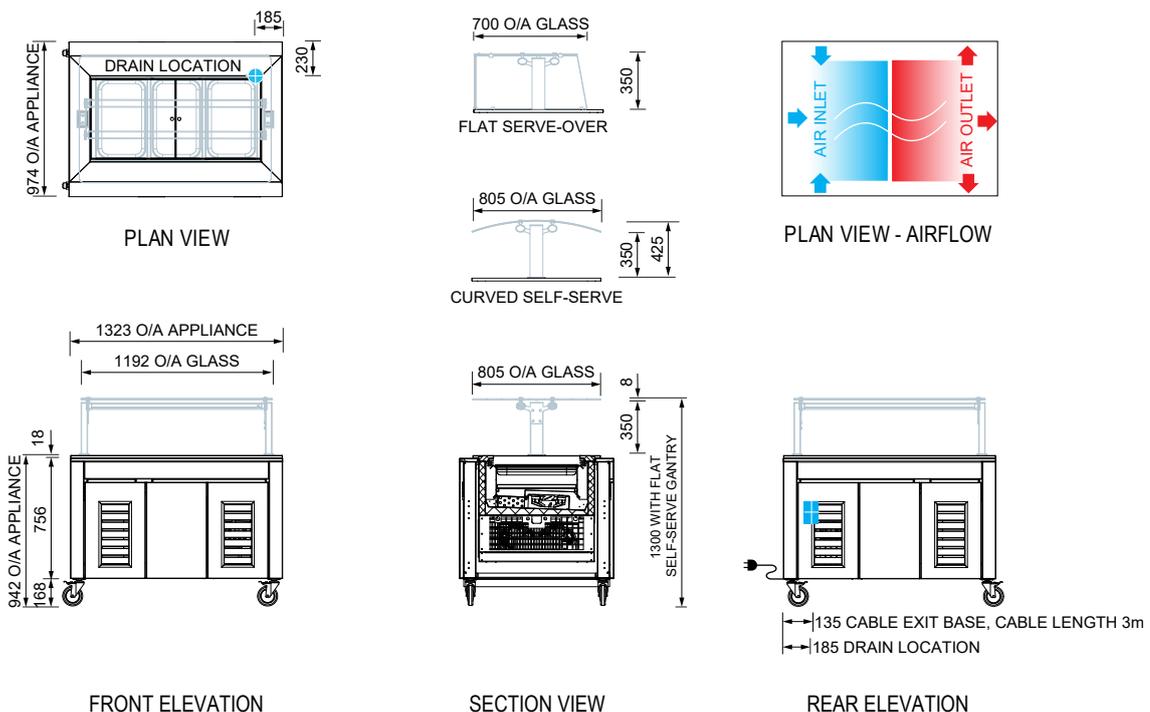

For information on technical data and installation guidelines please contact support@fpgworld.com

In line with our policy to continually develop, improve and support our products, Future Products Group Ltd reserves the right to change specifications and design without notice.

Have a question? Please email us at sales@fpgworld.com or visit www.fpgworld.com for full contact details for your region.

