


RANGE	INLINE 3000 SERIES BAIN MARIE
TEMPERATURE	HEATED
MODEL	IN-3B12-CU-FF-OC
FRONT	CURVED/FIXED FRONT
INSTALLATION	ON-COUNTER
HEIGHT	770mm
WIDTH	1203mm
DEPTH	663mm

TEMPERATURE RANGE	+30°C – +110°C
RECOMMENDED CORE PRODUCT TEMPERATURE	+65°C – +80°C
ENVIRONMENTAL TEST CONDITIONS	22°C / 65% RH

## FEATURES




-  **High energy efficiency: 1.2 kWh per hour (average)**
-  **Cabinet operating temperature range +30°C - +110°C**  
**Recommended core product temperature +65°C - +80°C**

- Smart display with toughened safety glass encased in brushed stainless steel frame

### Fixed Front Heated Display

- Fitted with halogen heat lamps, with 3000 hour warm white lighting
- Supplied with 3x 1/1 gastronorm dishes 65mm deep
- Extrusions at the top and bottom of the cabinet - front only - are fitted with stainless steel panels that can be replaced with branded inserts

### Operational Excellence

-  Sliding doors (staff side) and fixed front (customer side)
-  Constructed from stainless and mild steel with toughened safety glass and double-glazed end panels for maximum energy efficiency, climate control and durability
-  Low wattage density element provides even temperature distribution
- Dry operation well only
- Positioned on counter top



Showing : Inline 3000 Series Bain Marie heated 1200mm curved on-counter fixed front

## OPTIONS & ACCESSORIES

Contact a [FPG Sales Representative](#) for our full range, including:

- Add a holding shelf
- Branded decals/inserts
- Sides: mirror effect
- GN pans (various sizes)
- GN dividers
- Forward-facing controls
- Custom joinery solution



### HEATED DATA

MODEL	TEMPERATURE RANGE	RECOMMENDED CORE PRODUCT TEMPERATURE	ENVIRONMENTAL TEST CONDITIONS	HEATING
IN-3B12-CU-FF-OC	+30°C – +110°C	+65°C – +80°C	22°C / 65% RH	Low wattage density element / 2x 100 watt linear halogen

### ELECTRICAL DATA

MODEL	VOLTAGE	PHASE	CURRENT	E24H (kWh)	kWh per hour (average)	IP RATING	MAINS		HEAT LAMPS	HALOGEN LIGHTING	
							CONNECTION	CONNECTION PLUG <sup>1</sup>		HOURS	COLOUR
IN-3B12-CU-FF-OC	220-240 V	Single	7.5 A	28.8	12	IP 22	3 metre, 3 core cable	10 amp, 3 pin plug	2x 100 watt linear halogen	3000	Warm white

<sup>1</sup>Please advise country to change plug specification.


### CAPACITY, ACCESS & CONSTRUCTION

MODEL	DISPLAY AREA	NO. OF 1/1 PANS	ACCESS FRONT	ACCESS REAR	CHASSIS CONSTRUCTION
IN-3B12-CU-FF-OC	0.45 m <sup>2</sup>	3	Fixed front	Sliding doors	Stainless 304 and mild steel


### DIMENSIONS

MODEL	H x W x D mm (Uncrated)	MASS (Uncrated)
IN-3B12-CU-FF-OC	770 x 1203 x 663	92 kg


Crated weights and dimensions vary. Please contact us for information on your shipment.

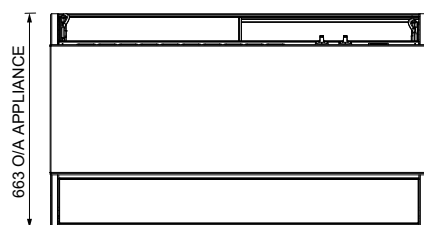


PLAN VIEW

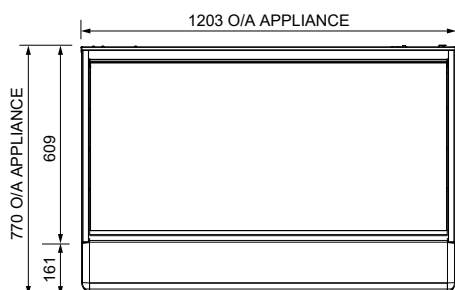

FRONT ELEVATION



SECTION VIEW

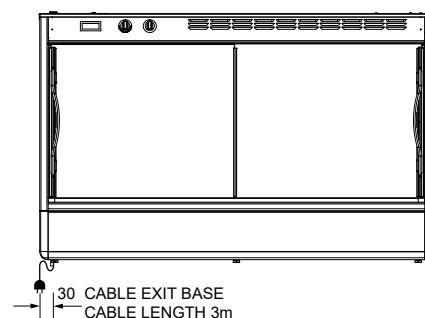

REAR ELEVATION

For information on technical data and installation guidelines please contact [support@fpgworld.com](mailto:support@fpgworld.com)

In line with our policy to continually develop, improve and support our products, Future Products Group Ltd reserves the right to change specifications and design without notice.

Have a question? Please email us at [sales@fpgworld.com](mailto:sales@fpgworld.com) or visit [www.fpgworld.com](http://www.fpgworld.com) for full contact details for your region.



Worldwide  
contact  
details: